



COMMERCIAL

Refrigeration Equipment 2-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 55.5 " Long

ITEM #

MODEL #

NAME #

SIS #

AIA #



738322 (KCHGICM49FB)

2-Hinged Glass Door Full
Height Ice Cube
Merchandiser Freezer 55.5
" Long

Short Form Specification

Item No.

2-glass door freezer with exterior back, bottom, and top panels in galvanized steel, exterior side panels in painted steel; interior back, side, top in painted aluminum, and interior bottom panel in 304 stainless steel. Electronic control.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5Years warranty

Main Features

- External digital temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

Construction

- Lockable door.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL:


Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

Front

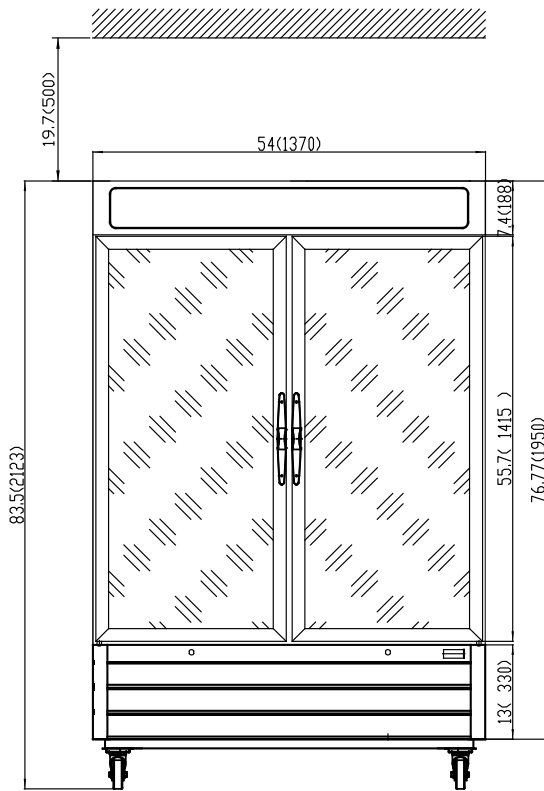

Side

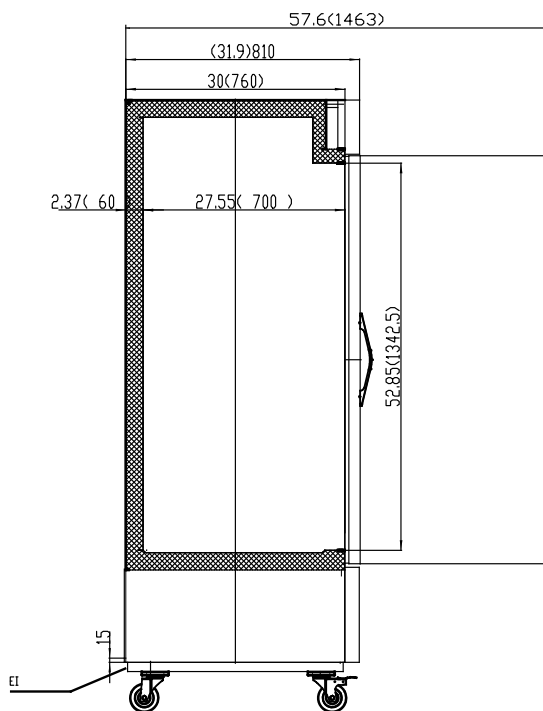

EI = Electrical connection

Electric

Supply voltage:

738322 (KCHGICM49FB)

120 V/1 ph/60 Hz

Electrical power, max:

1.08 kW

Plug type:

NEMA 5-15

Capacity:

Gross capacity:

47.9 cu.feet

Key Information:

External dimensions, Width: 55 1/2" (1410 mm)

External dimensions, Depth: 34 13/16" (885 mm)

External dimensions, Height: 85 13/16" (2180 mm)

Internal Dimensions (depth): 27 1/2" (698.5 mm)

Internal Dimensions (height): 52 3/8" (1330.96 mm)

Internal Dimensions (width): 49 3/8" (1254.76 mm)

Shipping height: 88 3/16" (2240 mm)

Shipping weight: 580 lbs (263 kg)

Shipping volume: 102.72 ft³ (2.91 m³)

Type of external material: Black Prepainted Steel

Type of internal material: White Prepainted Aluminium

Warranty: 3 / 5 years

Approvals ;ETL C&US;ETL SANITATION

Refrigeration Data

Compressor power: 1 1/4 hp

Operating temperature min.: 17.96 °F

Operating temperature max.: 23 °F

Condenser type: Fin & tube

Defrost type: Automatic

Sustainability

Current consumption: 0 Amps

Refrigerant type: R290

GWP Index: 3

Refrigerant weight: 150 g