

COMMERCIAL

Refrigeration Equipment 1-Door Under Counter Refrigerator 27" Long 32" Tall



door rofeir

1-door refrigerator counter top, 32 inch tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature, with required left side door hinges, for units with serial number 24020014 or later. External temperature display.

R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty

APPROVAL:

ITEM #	
MODEL #	
NAME #	-
SIS #	
AIA #	

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- ADA Height Compliant

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Optional Accessories 1 ADJUSTABLE FOOT P

- PNC 206445 🛛
- Drawer Kit for 27" Undercounter PNC 880614

Part of



32 (815)

Refrigeration Equipment 1-Door Under Counter Refrigerator 27" Long 32" Tall



Front

27.8(705)

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.16 kW
Plug type:	USA NEMA 5-15P

Capacity:

Number and type of grids
(included):1 - 570x425Gross capacity:6.5 cu.feet

Key Information:

Warranty:3Door hinges:FExternal dimensions, Width:2External dimensions, Depth:2External dimensions, Height:3Number and type of doors:1Internal Dimensions (depth):2Internal Dimensions (height):2Internal Dimensions (width):2Shipping height:3Shipping volume:1Type of external material:SType of internal material:FApprovalsE


3 / 5 years Right Side 27 3/4" (705 mm) 29 15/16" (760 mm) 32 1/16" (815 mm) 1 Full 22 13/16" / (580 mm) 23 1/2" / (597 mm) 22 1/4" / (565 mm) 34 13/16" (885 mm) 154 lbs (70 kg) 18.62 ft³ (0.53 m³) Stainless Steel Polystyrene ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Operating temperature min.: Compressor power: Operating temperature max.: Defrost type: Fin & tube 32 °F 1/10 hp 41 °F Auto Defrost

Sustainability

Current consumption: Refrigerant type: Refrigerant weight: 1.5 Amps R600a 70 g

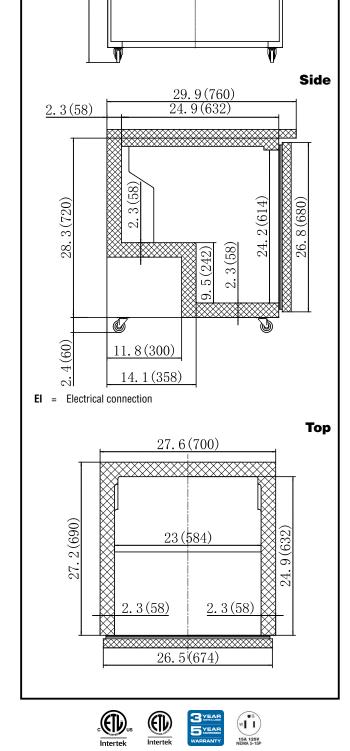

Refrigeration Equipment 1-Door Under Counter Refrigerator 27" Long 32" Tall

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.