

**Refrigeration Equipment
1-Door Under Counter
Refrigerator 27" Long 32" Tall**



738329 (KCHUC27R-32)

1-DOOR UNDER COUNTER
REFRIGERATOR 27" LONG
32" TALL

Short Form Specification

Item No.

1-door refrigerator counter top, 32 inch tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature, with required left side door hinges, for units with serial number 24020014 or later. External temperature display.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- ADA Height Compliant
- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Adjustable shelves for flexible storage
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Removable rubber bumper guards for airflow spacing and shock absorption

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- White polystyrene interior side panels, for high impact resistance
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- Door reversible on site

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 60 mm insulation for energy saving.

Optional Accessories

• 1 ADJUSTABLE FOOT	PNC 206445	<input type="checkbox"/>
• Drawer Kit for 27" Undercounter	PNC 880614	<input type="checkbox"/>


APPROVAL: _____

Part of



Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

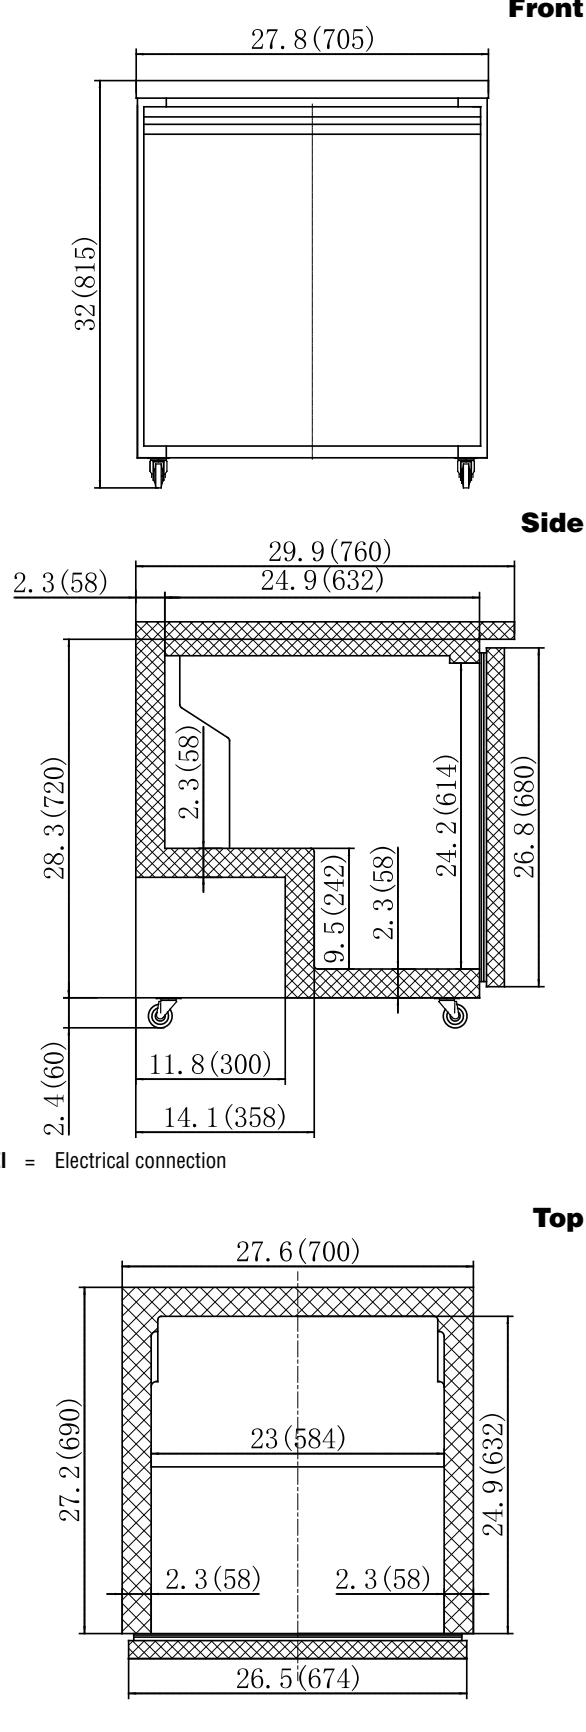

Electric

Supply voltage: 115 V/1 ph/60 Hz
Electrical power, max: 0.16 kW
Plug type: USA NEMA 5-15P

Capacity:

Gross capacity: 6.5 cu.feet

Key Information:

Number and type of grids (included): 1 - Vinyl-Coated steel
Warranty: 3 / 5 years
Door hinges: Right Side
External dimensions, Width: 27 3/4" (705 mm)
External dimensions, Depth: 29 15/16" (760 mm)
External dimensions, Height: 32 1/16" (815 mm)
Number and type of doors: 1 Full
Internal Dimensions (depth): 22 13/16" / (580 mm)
Internal Dimensions (height): 23 1/2" / (597 mm)
Internal Dimensions (width): 22 1/4" / (565 mm)
Shipping height: 34 13/16" (885 mm)
Shipping weight: 154 lbs (70 kg)
Shipping volume: 18.62 ft³ (0.53 m³)
Type of external material: Stainless Steel
Type of internal material: Polystyrene
Approvals ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Fin & tube
Operating temperature min.: 32 °F
Compressor power: 1/10 hp
Operating temperature max.: 41 °F
Defrost type: Auto Defrost

Sustainability

Current consumption: 1.5 Amps
Refrigerant type: R600a
Refrigerant weight: 70 g

