

Refrigeration Equipment 2-Door Full Height Refrigerator 54" Long - 220V/50Hz

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738342
(KCHRI54R2DR-220.50)

2-DOOR FULL HEIGHT
REFRIGERATOR 54" LONG -
220V/50Hz

Short Form Specification

Item No. _____

2 full door refrigerator with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing door feature with lock and key.

Cabinet capable of accepting a full-size sheet pan (18X26).

220V / 50Hz / 1ph supply voltage
R290 gas in the refrigeration circuit.
CE certification

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Adjustable shelves for flexible storage
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting a full-size sheet pan (18X26)

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.


Sustainability

- Interior LED light to save energy and for best internal visibility.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 60 mm insulation for energy saving.

Optional Accessories

- 1 Adjustable Foot PNC 206445
- Shelf for 54" and 81" (left/right) Reach-In (Solid Door) PNC 880591
- Shelf clips (4-pack) PNC 880611

APPROVAL: _____

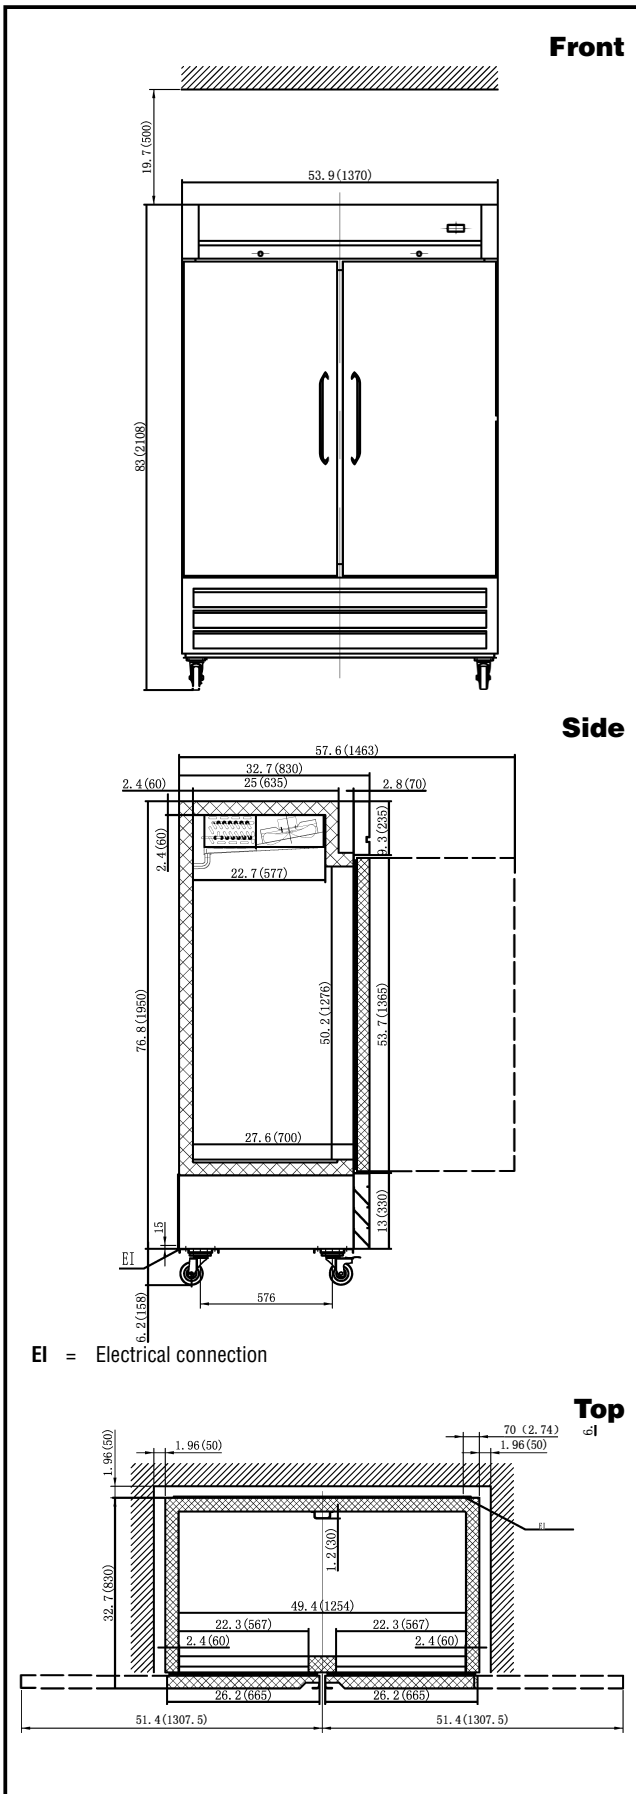

Electric

Supply voltage:	220 V/1 ph/50 Hz
Electrical power, max:	0.65 kW
Plug type:	

Capacity:

Gross capacity:	46.7 cu.feet
-----------------	--------------

Key Information:

Number and type of grids (included):	6 - Vinyl-Coated steel
Door hinges:	1 Left+1 Right
Capacity:	46.6596 cu.ft.
External dimensions, Width:	53 15/16" (1370 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	83 " (2108 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	27 1/2" / (698.5 mm)
Internal Dimensions (height):	50 3/16" / (1275.08 mm)
Internal Dimensions (width):	49 3/8" / (1254.76 mm)
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	490 lbs (222.26 kg)
Shipping volume:	92.27 ft ³ (2.61 m ³)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI
Approvals	CE

Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/4 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	130 g

