

Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 36" Long 10-1/6 Pan

ITEM #

MODEL #

NAME #

SIS #

AIA #



738366 (KCHST36.10)

2-Door Sandwich/Salad Prep
Table 36" Long 10-1/6 Pan

Short Form Specification

Item No.

2-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 36x11.4x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.


Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Holds 10 1/6 pans

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL:

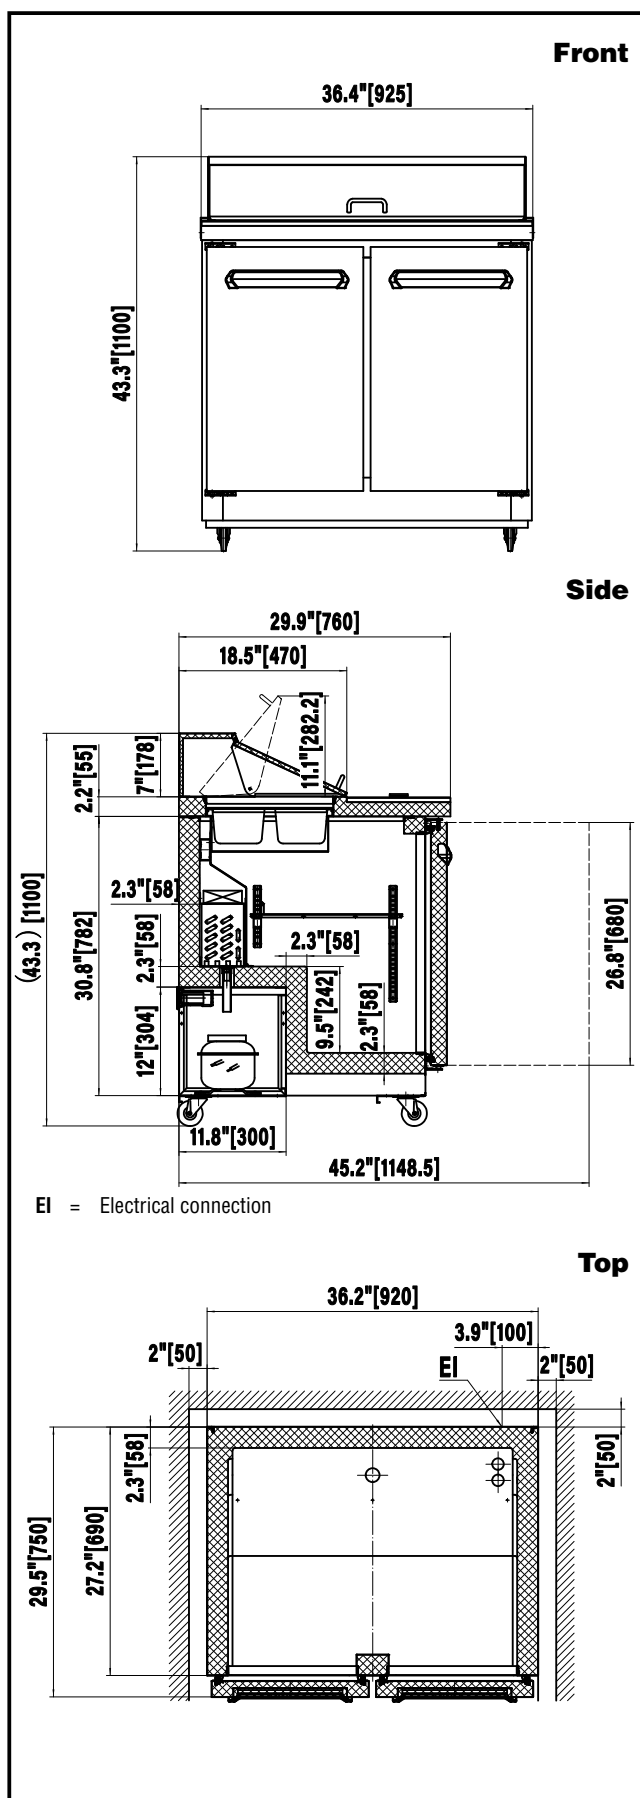

Electric

Supply voltage: 115 V/1 ph/60 Hz
Plug type: USA NEMA 5-15P

Capacity:

Gross capacity: 8.9 cu.feet

Key Information:

Warranty: 3 / 5 years
Door hinges: 1 Left+1 Right
External dimensions, Width: 36 7/16" (925 mm)
External dimensions, Depth: 29 15/16" (760 mm)
External dimensions, Height: 43 5/16" (1100 mm)
Number and type of doors: 2 Full
Internal Dimensions (depth): 25 9/16" / (649 mm)
Internal Dimensions (height): 19 1/2" / (495 mm)
Internal Dimensions (width): 31 1/2" / (800 mm)
Shipping height: 47 1/4" (1200 mm)
Shipping weight: 300 lbs (136 kg)
Shipping volume: 32.71 ft³ (0.93 m³)
Type of external material: Stainless Steel
Type of internal material: Polystyrene
Approvals: ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type: Fin & tube
Operating temperature min.: 32 °F
Compressor power: 1/3 hp
Operating temperature max.: 41 °F
Defrost type: Auto Defrost

Sustainability

Current consumption: 4.3 Amps
Refrigerant type: R290
GWP Index: 3
Refrigerant weight: 90 g

