



COMMERCIAL

Refrigeration Equipment 4-Tub Ice Cream Dipping Cabinet 33" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738371 (KCICDC4FH)

4-Tub Ice Cream Dipping
Cabinet 33" Long

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (4) barrel ice cream tub frames; (4) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 4-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

Construction

- Tempered glass viewing panels & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Optional Accessories

- Combined 5L Pan Support PNC 882012
Metal Frame & 5L Pan
Support Acrylic Frame for 4
Tub Ice Cream Dipping
Cabinet

APPROVAL: _____

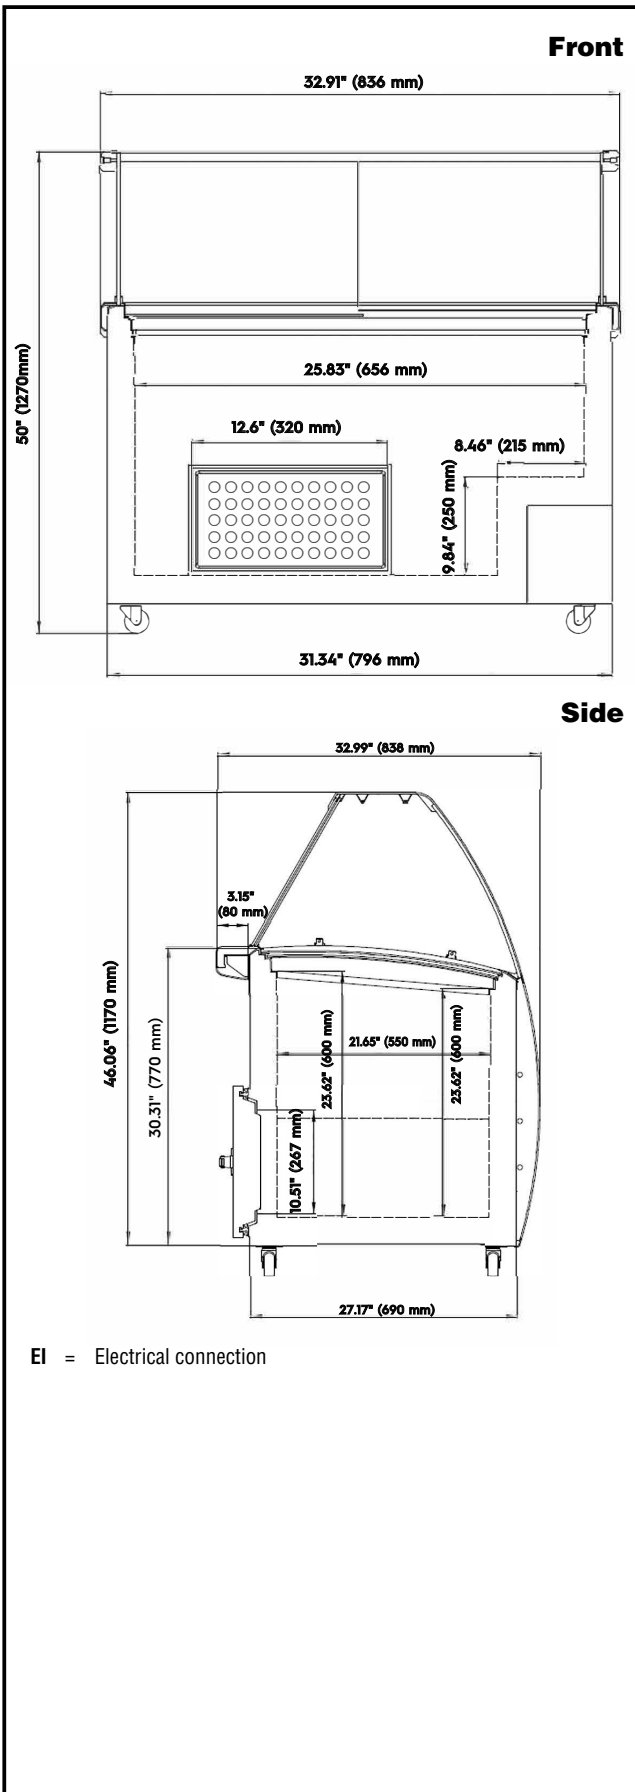

Electric

Supply voltage:	738371 (KCICDC4FH)	115 V/1 ph/60 Hz
Electrical power, max:		0.2 kW
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	8.3 cu.feet
-----------------	-------------

Key Information:

Door hinges:	
External dimensions, Width:	32 15/16" (836 mm)
External dimensions, Depth:	33 " (838 mm)
External dimensions, Height:	50 " (1270 mm)
Number and type of doors:	
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	25 13/16"
Internal Dimensions (width):	21 5/8"
Shipping height:	50 9/16" (1285 mm)
Shipping weight:	238 lbs (108 kg)
Shipping volume:	44.01 ft ³ (1.25 m ³)
Number and type of grids (included):	
Type of external material:	Prepainted white
Type of internal material:	White Prepainted Steel
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Current absorbed:	1.3 Amps
Compressor power:	1/5 hp
Operating temperature min.:	-4 °F
Operating temperature max.:	4 °F
Condenser type:	Fin & tube
Defrost type:	Automatic

Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	68 g