

## Refrigeration Equipment 6-Tub Ice Cream Dipping Cabinet 42.5" Long

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738372 (KCICDC6FH)

6-Tub Ice Cream Dipping  
Cabinet 42.5" Long

### Short Form Specification

#### Item No. \_\_\_\_\_

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (6) barrel ice cream tub frames; (6) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Ropak tub bracket insert included after select serial number 004342000182

Dipper well accessory available for units after select serial number 005242000182

### Main Features

- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 6-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

### Construction

- Tempered glass viewing pains & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


### Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

### Optional Accessories

- Combined 5L Pan Support Metal Frame & 5L Pan Support Acrylic Frame for 6 Tub Ice Cream Dipping Cabinet PNC 882013 ☐
- Dipper Well Kit With Faucet PNC 882016 ☐

APPROVAL: \_\_\_\_\_

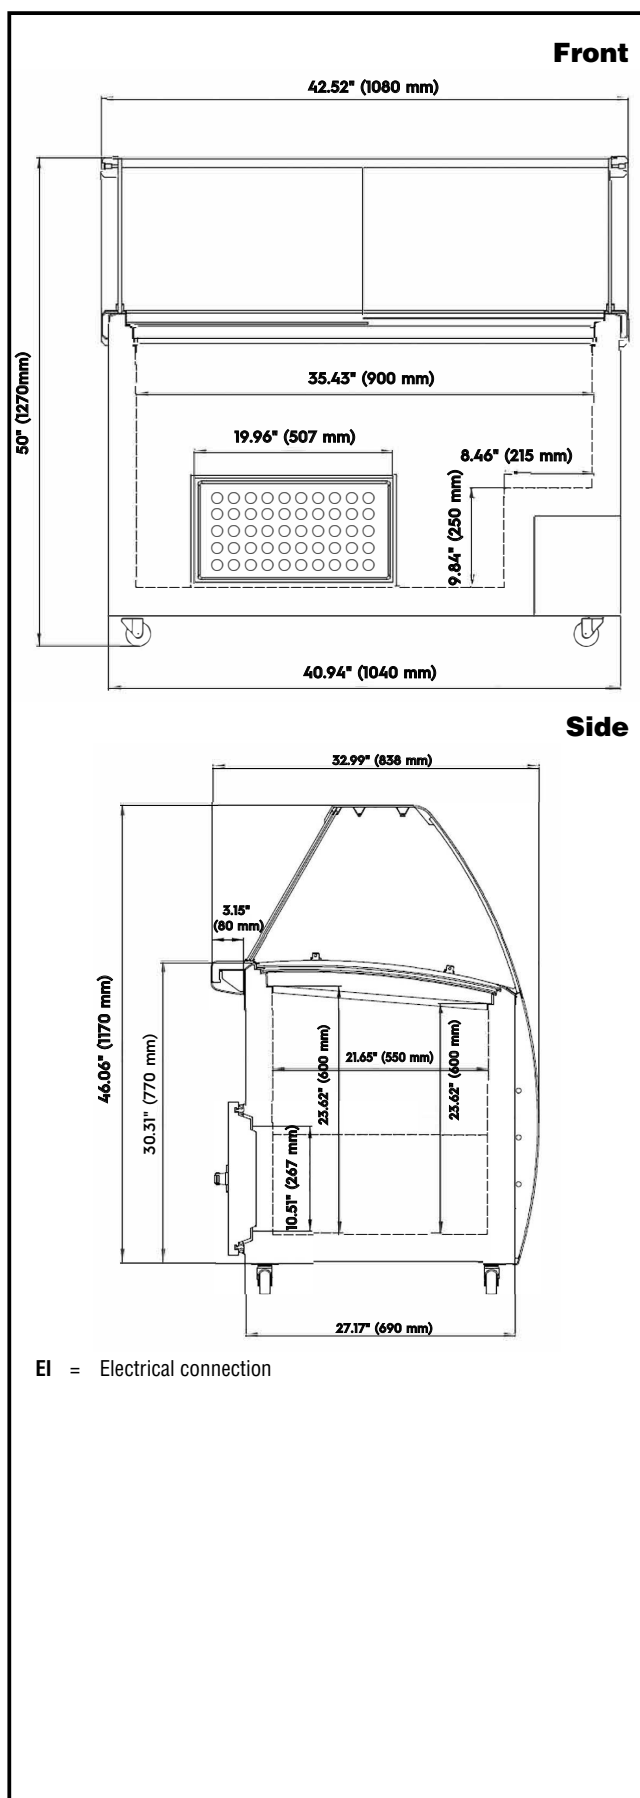

## Electric

<b>Supply voltage:</b>	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.25 kW
<b>Plug type:</b>	USA NEMA 5-15P

### Key Information:

<b>Warranty:</b>	3 / 5 years
<b>Capacity:</b>	11.4773 cu.ft.
<b>External dimensions, Width:</b>	42 1/2" (1080 mm)
<b>External dimensions, Depth:</b>	33 " (838 mm)
<b>External dimensions, Height:</b>	50 " (1270 mm)
<b>Internal Dimensions (depth):</b>	21 5/8" / (550 mm)
<b>Internal Dimensions (height):</b>	23 5/8" / (600 mm)
<b>Internal Dimensions (width):</b>	35 7/16" / (900 mm)
<b>Shipping height:</b>	50 9/16" (1285 mm)
<b>Shipping weight:</b>	304 lbs (138 kg)
<b>Shipping volume:</b>	55.18 ft³ (1.56 m³)
<b>Type of external material:</b>	Prepainted white
<b>Type of internal material:</b>	White Prepainted Steel
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Condenser type:</b>	Fin & tube
<b>Operating temperature min.:</b>	-18.4 °F
<b>Compressor power:</b>	1/5 hp
<b>Operating temperature max.:</b>	6.8 °F
<b>Defrost type:</b>	Automatic

## Sustainability

<b>Current consumption:</b>	1.4 Amps
<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	95 g

**EI** = Electrical connection

