



COMMERCIAL

Refrigeration Equipment 6-Tub Ice Cream Dipping Cabinet 48" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738372 (KCICDC6FH)

6-Tub Ice Cream Dipping
Cabinet 48" Long

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (6) barrel ice cream tub frames; (6) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 6-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.


Construction

- Tempered glass viewing pans & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.

Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

APPROVAL: _____

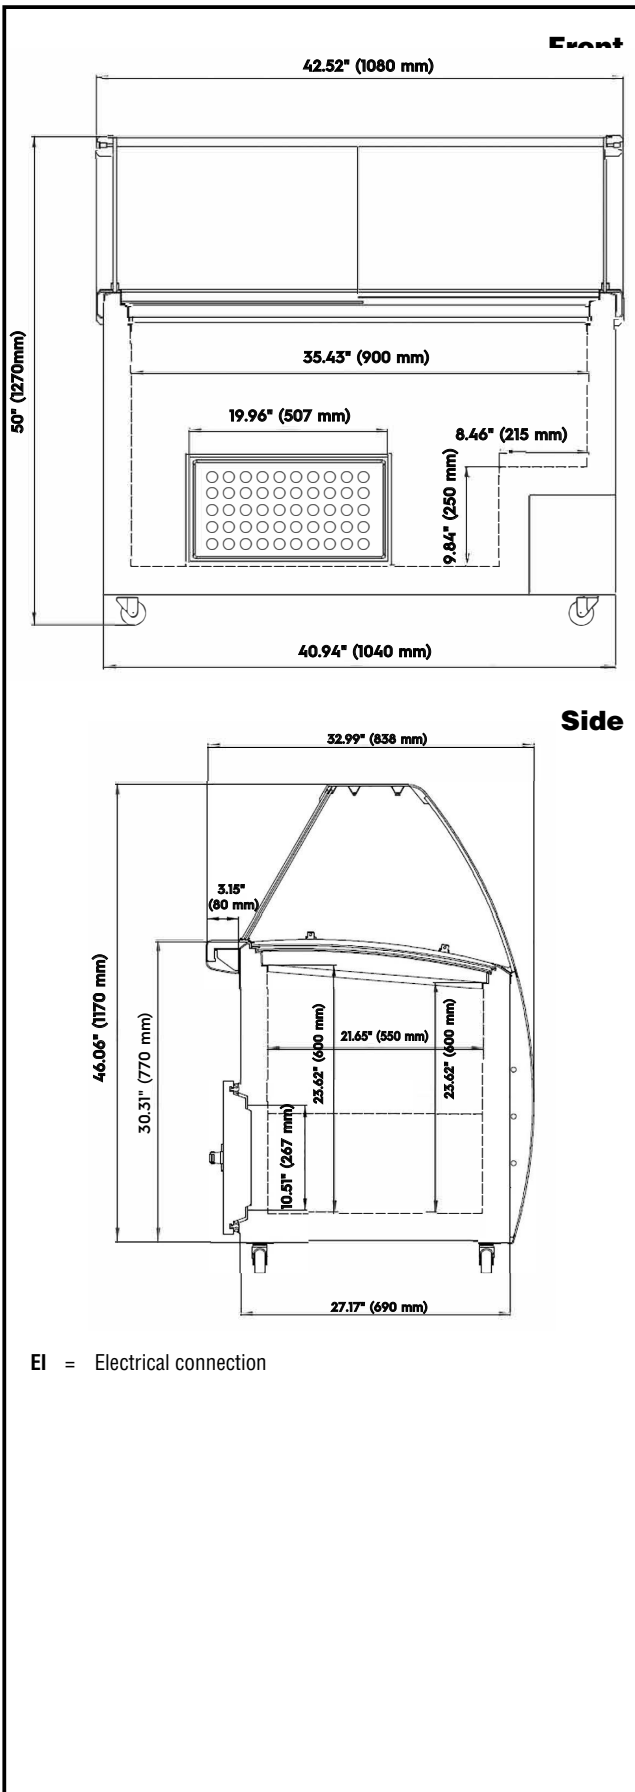

Electric

Supply voltage:

738372 (KCICDC6FH) 120 V/1 ph/60 Hz

Electrical power, max:

0.2 kW

Plug type:

USA NEMA 5-15P

Maximum Over-Current Protection (MOP):

0A

Key Information:

Capacity:

10.5944 cu.ft.

External dimensions, Width:

47 5/8" (1210 mm)

External dimensions, Depth:

39 9/16" (1005 mm)

External dimensions, Height:

51 9/16" (1310 mm)

Internal Dimensions (depth):

23 5/8"

Internal Dimensions (height):

35 7/16"

Internal Dimensions (width):

21 5/8"

Shipping height:

53 15/16" (1370 mm)

Shipping weight:

392 lbs (178 kg)

Shipping volume:

61.24 ft³ (1.73 m³)

Type of external material:

Prepainted white

Type of internal material:

White Prepainted Steel

Approvals

;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:

-4 °F

Operating temperature max.:

4 °F

Refrigerant type:

Sustainability

Current consumption:

Refrigerant type:

R290