



COMMERCIAL

# Refrigeration Equipment 8-Tub Ice Cream Dipping Cabinet 58" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738373 (KCICDC8FH)

8-Tub Ice Cream Dipping  
Cabinet 58" Long

## Short Form Specification

Item No. \_\_\_\_\_

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (8) barrel ice cream tub frames; (8) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

## Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 8-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.


## Construction

- Tempered glass viewing pans & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.

## Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

APPROVAL: \_\_\_\_\_

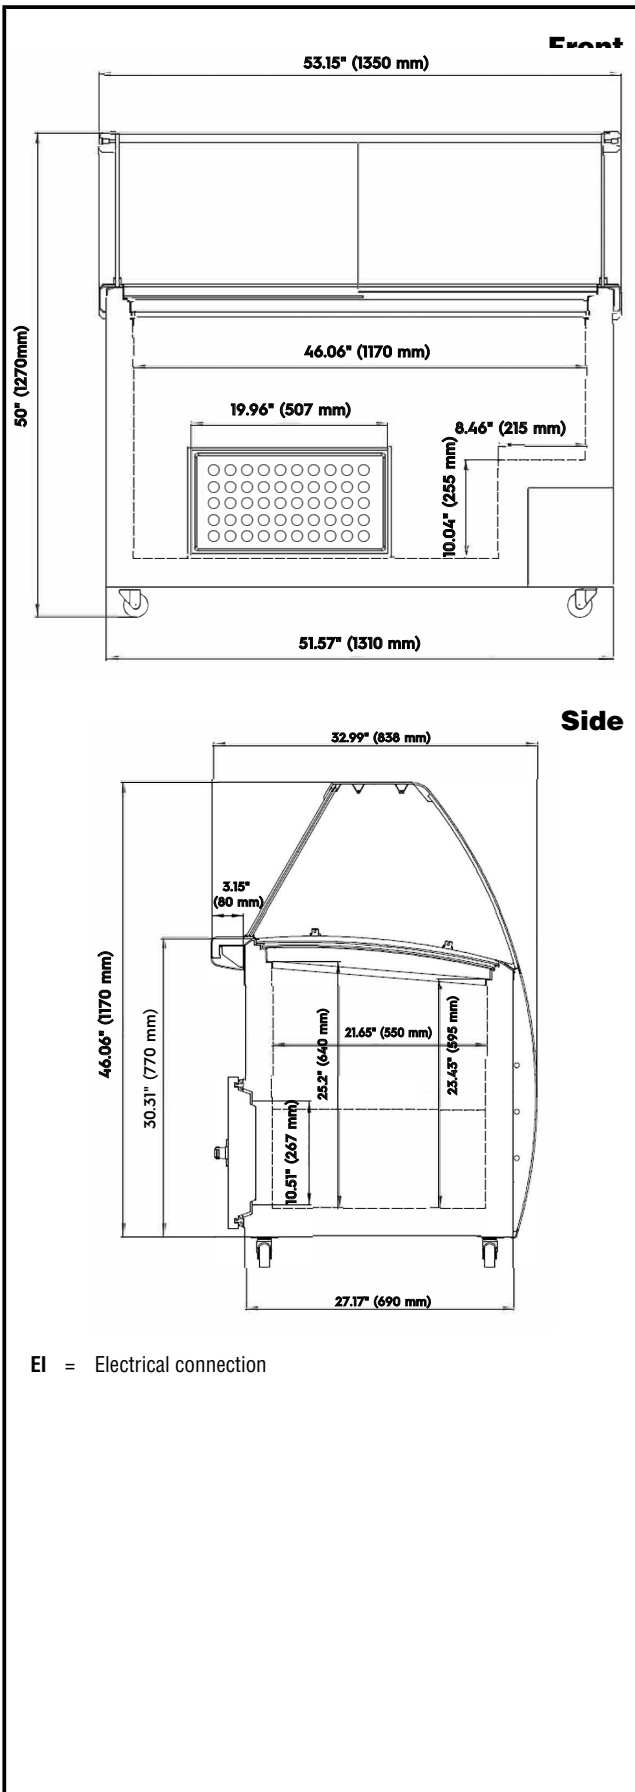

## Electric

Supply voltage:	738373 (KCICDC8FH)	120 V/1 ph/60 Hz
Electrical power, max:		0.3 kW
Defrost Power		
Plug type:		USA NEMA 5-15P
Maximum Over-Current Protection (MOP):		0A

## Key Information:

Gross capacity:	400 lt
Capacity:	14.1259 cu.ft.
External dimensions, Width:	58 1/4" (1480 mm)
External dimensions, Depth:	39 9/16" (1005 mm)
External dimensions, Height:	51 9/16" (1310 mm)
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	46 1/16"
Internal Dimensions (width):	21 5/8"
Shipping height:	53 15/16" (1370 mm)
Shipping weight:	452 lbs (205 kg)
Shipping volume:	74.63 ft <sup>3</sup> (2.11 m <sup>3</sup> )
Approvals	;ETL C&US;ETL SANITATION

## Refrigeration Data

Operating temperature min.:	-4 °F
Operating temperature max.:	4 °F

## Sustainability

Current consumption:	
Refrigerant type:	R290