



COMMERCIAL

Refrigeration Equipment 10-Tub Ice Cream Dipping Cabinet 67.75" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738374 (KCICDC10FH)

10-Tub Ice Cream Dipping
Cabinet 67.75" Long

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (10) barrel ice cream tub frames. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 10-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

Construction

- Tempered glass viewing pans & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Optional Accessories

- Combined 5L Pan Support Metal PNC 882015 □
Frame & 5L Pan Support Acrylic
Frame for 10 Tub Ice Cream
Dipping Cabinet

APPROVAL: _____

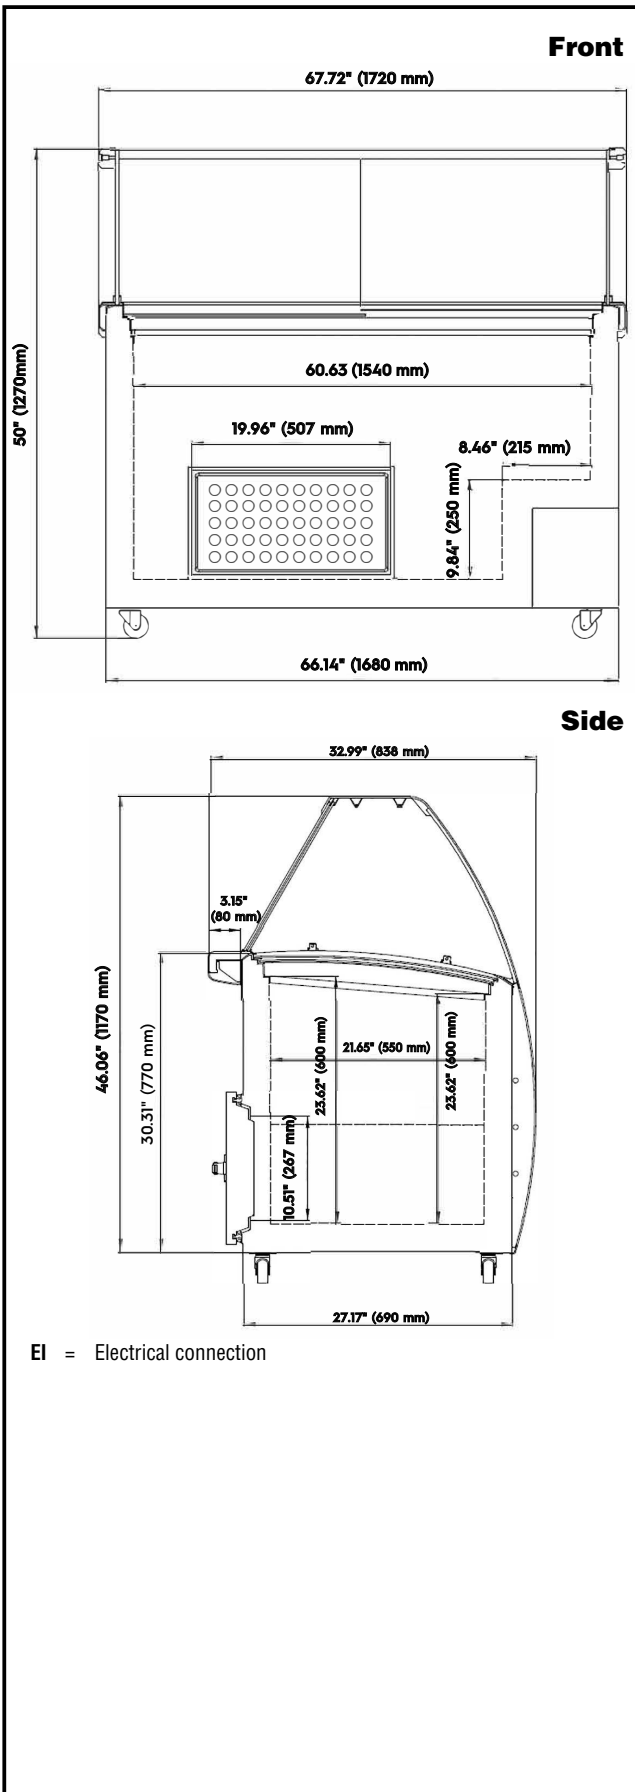

Electric

Supply voltage:	738374 (KCICDC10FH)	115 V/1 ph/60 Hz
Electrical power, max:		0.4 kW
Plug type:		USA NEMA 5-15P
Maximum Over-Current Protection (MOP):		0A

Key Information:

Gross capacity:	575 lt
Net Volume:	394 lt
Capacity:	20.306 cu.ft.
External dimensions, Width:	67 3/4" (1720 mm)
External dimensions, Depth:	33 " (838 mm)
External dimensions, Height:	50 " (1270 mm)
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	60 5/8"
Internal Dimensions (width):	21 5/8"
Shipping height:	50 9/16" (1285 mm)
Shipping weight:	439 lbs (199 kg)
Shipping volume:	84.36 ft ³ (2.39 m ³)
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:	-4 °F
Operating temperature max.:	4 °F

Sustainability

Current consumption:	4.1 Amps
Refrigerant type:	R290