

COMMERCIAL

Refrigeration Equipment 3-Door Full Height Freezer 81 " Long



738246 (KCHRI81R3DF)

3-Door Full Height Freezer 81 " Long

Short Form Specification

Item No.

3 full doors freezer with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainelss steel.

Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

| ITEM # | |
|---------|--|
| MODEL # | |
| NAME # | |
| SIS # | |
| AIA # | |

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worryfree performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- · Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- shelf for 54" and 81" (left/right) reach- PNC 880591
 in
- middle shelf for 81" reach-ins PNC 880592
- shelf clips PNC 880611

APPROVAL:



Kelvinator Commercial www.kelvinatorcommercial.com



Refrigeration Equipment 3-Door Full Height Freezer 81 Long



| Supply voltage: | |
|------------------------|------------------|
| 738246 (KCHRI81R3DF) | 230 V/1 ph/60 Hz |
| Electrical power, max: | 1 kW |
| Plug type: | USA NEMA L14-20P |
| | |

Key Information:

Capacity (Cu.Ft.) Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): **Compressor Horsepower:** Type of external material: Type of internal material: Warranty:

72 1 Left+2 Right 81 " (2057 mm) 32 11/16" (830 mm) 82 1/4" (2090 mm) 3 Full 27 1/16" 60 1/4"

76 5/16" 84 5/8" (2150 mm) 809 lbs (367 kg) 139.55 ft3 (3.95 m3)

9 - Coated Steel 1 1/4 430 AISI 304 AISI 3 / 5 years

Refrigeration Data

| Operating temperature min.: | -7.6 °F | |
|------------------------------|--------------|--|
| Operating temperature max.: | -4 °F | |
| Condenser type: | Fin & tube | |
| Defrost type: | Auto Defrost | |
| A I I I I I I I I I I | | |


Sustainability

Current consumption: Refrigerant type: Refrigerant weight:

8 Amps R290 150 g



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

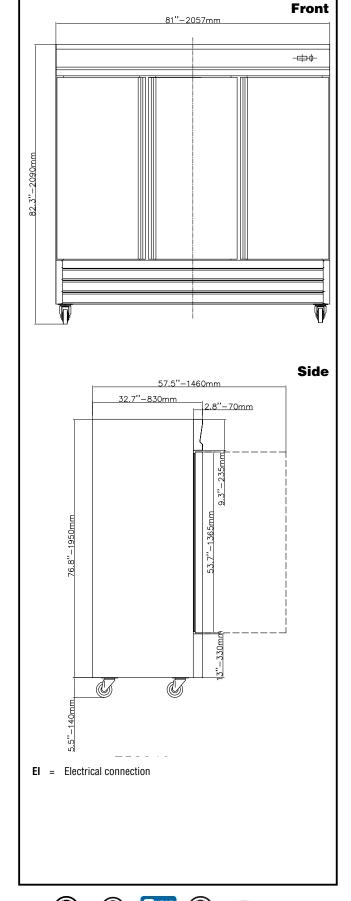





Interte





2024.04.09