

### COMMERCIAL

# Refrigeration Equipment Reach-In Freezer, 3 Doors, 72 cu.ft - Stainless Steel

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



738246 (KCHRI81R3DF)

3-Door Full Height Freezer 81 " Long

# **Short Form Specification**

### Item No.

3 full doors freezer with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainelss steel.

Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### **Main Features**

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worryfree performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- Interior LED light to save energy and for best internal visibility.

## Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- · Heavy duty casters.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### **Sustainability**

 High efficiency components to minimize the energy consumption still guaranteeing the highest performances.


# **Optional Accessories**

shelf for 54" and 81" (left/right) reachin
 middle shelf for 81" reach-ins
 pNC 880592
 shelf clips
 PNC 880611

APPROVAL:



# Refrigeration Equipment Reach-In Freezer, 3 Doors, 72 cu.ft - Stainless Steel

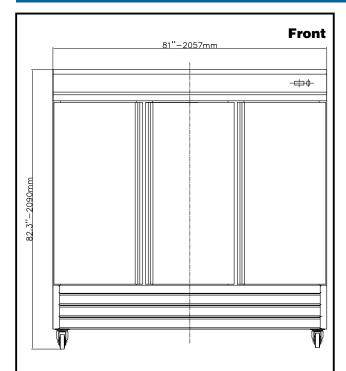

# 32.7"-830mm 2.8"-70mm 2.8"-70mm 2.8"-70mm 32.7"-830mm 2.8"-70mm 4.8" 4.8" 5.5" 4.8" 5.5" 6.8" 6.8" 6.8" 6.8" 7.8" 6.8" 7.

### **Electric**

Supply voltage:

**738246 (KCHRI81R3DF)** 230 V/1 ph/60 Hz

Electrical power, max: 1 kW

Plug type: USA NEMA L14-20P

### **Key Information:**

Capacity (Cu.Ft.) 72

Door hinges:1 Left+2 RightExternal dimensions, Width:81 " (2057 mm)External dimensions, Depth:32 11/16" (830 mm)External dimensions, Height:82 1/4" (2090 mm)

Number and type of doors:3 FullInternal Dimensions (depth):27 1/16"Internal Dimensions (height):60 1/4"Internal Dimensions (width):76 5/16"

 Shipping height:
 84 5/8" (2150 mm)

 Shipping weight:
 776 lbs (352 kg)

 Shipping volume:
 139.55 ft³ (3.95 m³)

Number and type of grids

Side

(included): 9 - Coated Steel

Compressor Horsepower:1 1/4Type of external material:430 AISIType of internal material:304 AISIWarranty:3 / 5 years

### **Refrigeration Data**

Operating temperature min.: -7.6 °F
Operating temperature max.: -4 °F
Condenser type: Fin & tube
Defrost type: Auto Defrost

## **Sustainability**

Current consumption:8 AmpsRefrigerant type:R290Refrigerant weight:150 g









