

COMMERCIAL

Refrigeration Equipment Pizza Preparation Table, 2 Door with 9GN 1/3 containers - Stainless Steel (R290)



738253 (KCHPT72.9)

2-Door Pizza Prep Table 71 " Long 9-1/3 Pan

Short Form Specification

Item No.

2-door pizza refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainelss steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x70.79x19.53 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- External temperature display.
- · Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- · Heavy duty Vinyl coated steel shelves.

Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 9 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Optional Accessories

- shelf for 72" pizza counter PNC 880602
- shelf clips

PNC 880611 🛛

APPROVAL:

Part of


Kelvinator Commercial www.kelvinatorcommercial.com



Refrigeration Equipment Pizza Preparation Table, 2 Door with 9GN 1/3 containers - Stainless Steel (R290)

1

Fre	ont	Electric	
22.9"-582mm		Supply voltage: 738253 (KCHPT72.9) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.8 kW NEMA 5-15
		Capacity:	
-==+++		Gross capacity:	22 cu.feet
		Key Information:	
Si	ide	Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of grids (included): Type of external material: Type of internal material: Warranty:	1 Left+1 Right 70 13/16" (1798 mm) 32 1/4" (820 mm) 41 5/16" (1050 mm) 2 Full 22 13/16" 26 3/16" 48 7/16" 44 1/2" (1130 mm) 434 lbs (197 kg) 63.65 ft ³ (1.8 m ³) Vinyl-Coated steel Stainless Steel 304 AISI 3 / 5 years
		Refrigeration Data	
		Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type:	1/3 hp 32 °F 41 °F Fin & tube Auto Defrost
		Sustainability	
		Current consumption: Refrigerant type: Refrigerant weight:	7.5 Amps R290 105 g
	9"−582mm		Supply voltage: 738253 (KCHPT72.9) Electrical power, max: Plug type: Capacity: Capacity: Capacity: Key Information: Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (depth): Internal Dimensions (width): Shipping weight: Shipping weight: Shipping volume: Type of grids (included): Type of internal material: Type of internal material: Type of internal material: Type of internal material: Type of internal material: Doerating temperature min.: Operating temperature max.: Condenser type: Defrost type: Sustainability Current consumption: Refrigerant type:

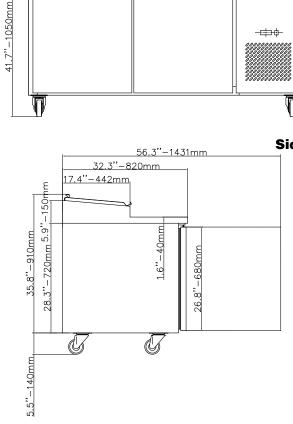

70.8"-1798mm

43.9"-1114mm

EI = Electrical connection



Intertek

(w I I)

15A 125V NEMA 5-15P

