



COMMERCIAL

## Refrigeration Equipment Sandwich/Salad Preparation Table, 27" 8GN 1/6 containers - Stainless Steel (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738255 (KCHST27.8)

1-Door Sandwich/Salad Prep  
Table 29" Long 6-1/6, 2-1/9  
Pan

### Short Form Specification

**Item No.** \_\_\_\_\_

1-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 28,9x11,4x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

### Construction


- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds (6) 1/6 & (2) 1/9 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: \_\_\_\_\_

**Front**

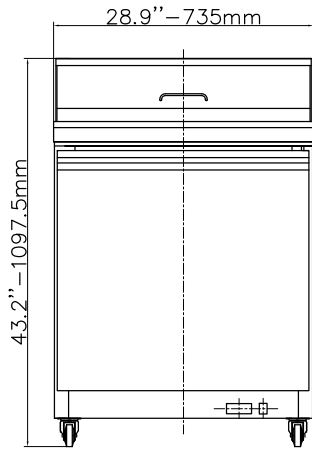


**Side**

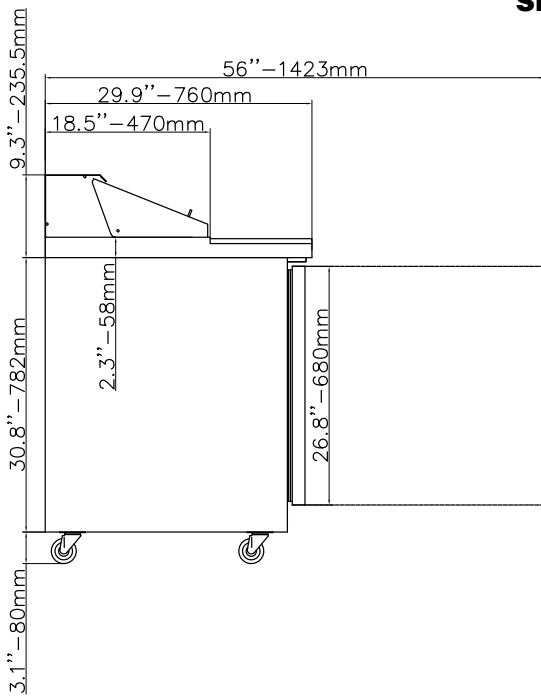

EI = Electrical connection

**Top**

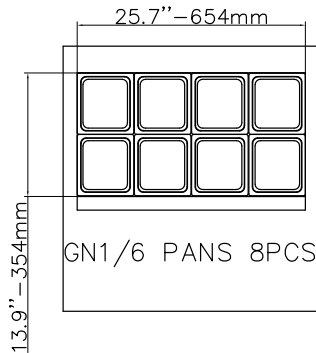

**Electric**

Supply voltage:	738255 (KCHST27.8)	115 V/1 ph/60 Hz
Electrical power, max:		0.5 kW
Plug type:		USA NEMA 5-15P

**Capacity:**

Gross capacity:	7 cu.feet
-----------------	-----------

**Key Information:**

Door hinges:	Right Side
External dimensions, Width:	28 15/16" (735 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	43 3/16" (1097.5 mm)
Number and type of doors:	1 Full
Internal Dimensions (depth):	23 13/16"
Internal Dimensions (height):	23 1/2"
Internal Dimensions (width):	24 1/16"
Shipping height:	47 1/4" (1200 mm)
Shipping weight:	236 lbs (107 kg)
Shipping volume:	26.27 ft <sup>3</sup> (0.74 m <sup>3</sup> )
Type of grids (included):	Vinyl-Coated steel
Number and type of grids (included):	1 - 636x443
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years

**Refrigeration Data**

Compressor power:	
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

**Sustainability**

Current consumption:	5 Amps
Refrigerant type:	R290
Refrigerant weight:	85 g