



COMMERCIAL

## Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 48" Long 12-1/6 Pan

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738256 (KCHST48.12)

2-Door Sandwich/Salad Prep  
Table 48" Long 12-1/6 Pan

### Short Form Specification

Item No. \_\_\_\_\_

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

### Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 12 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Shelf for 48" and 72" (left/right) PNC 880597   
Mega Top, Salad and Undercounter
- Shelf clips (4-pack) PNC 880611

APPROVAL: \_\_\_\_\_

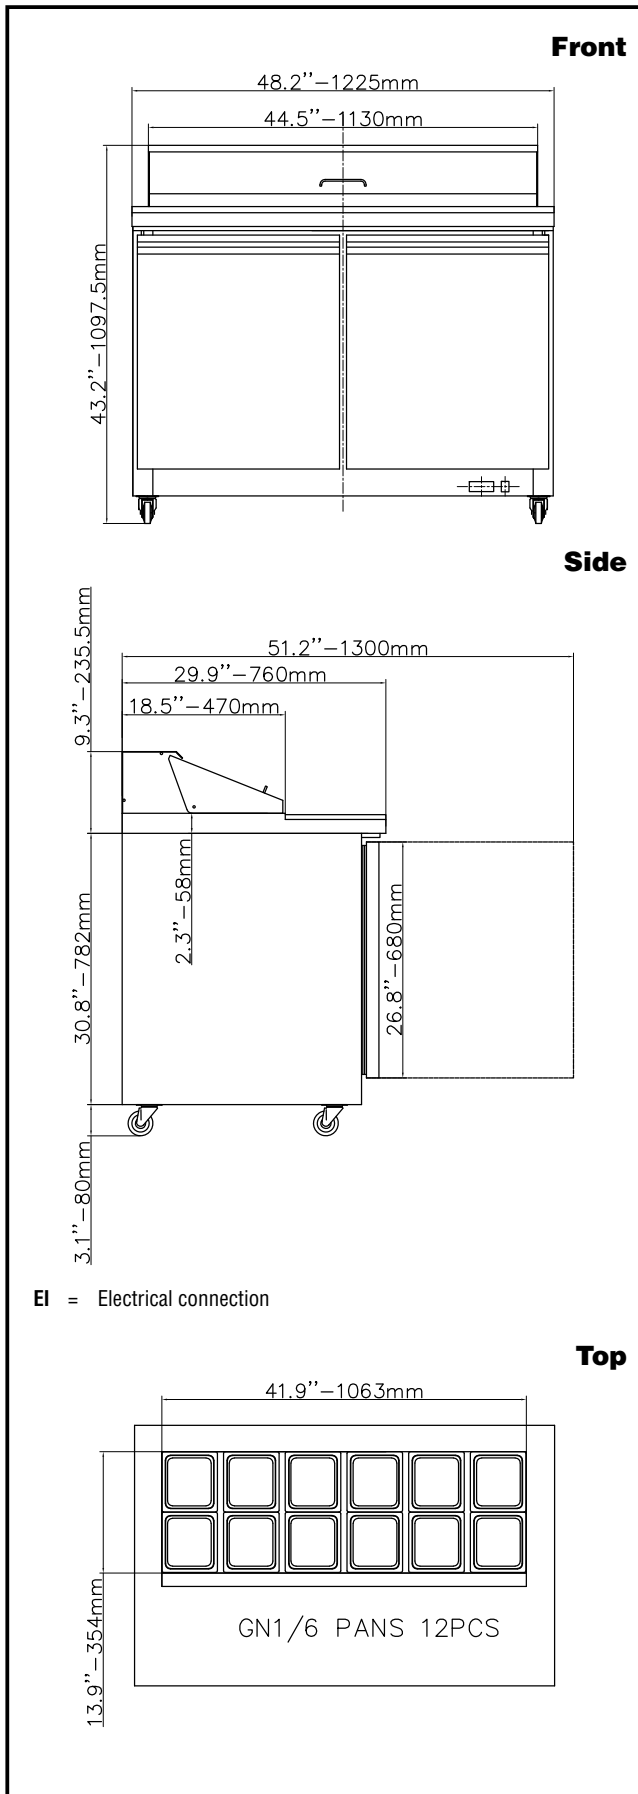

## Electric

Supply voltage:	738256 (KCHST48.12)	115 V/1 ph/60 Hz
Electrical power, max:		0.72 kW
Plug type:		USA NEMA 5-15P

## Capacity:

Gross capacity:	12 cu.feet
-----------------	------------

## Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Width:	48 1/4" (1225 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	43 3/16" (1097.5 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	23 13/16"
Internal Dimensions (height):	23 1/2"
Internal Dimensions (width):	42 13/16"
Shipping height:	47 1/4" (1200 mm)
Shipping weight:	333 lbs (151 kg)
Shipping volume:	42.88 ft <sup>3</sup> (1.21 m <sup>3</sup> )
Type of grids (included):	Vinyl-Coated steel
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years

## Refrigeration Data

Compressor power:	1/3 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

## Sustainability

Current consumption:	7 Amps
Refrigerant type:	R290
Refrigerant weight:	90 g