



COMMERCIAL

Refrigeration Equipment 2-Door Mega Top Prep 60 " Long 24-1/6 Pan


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

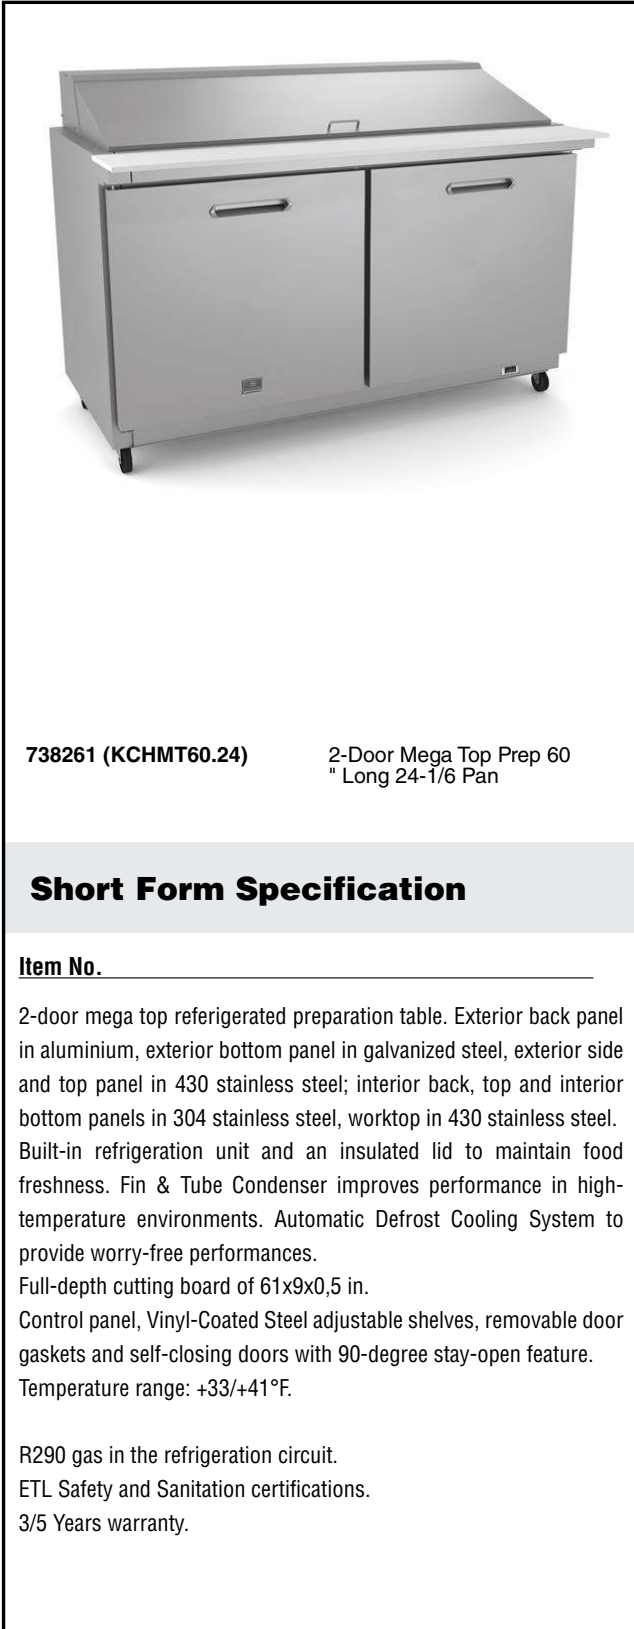

738261 (KCHMT60.24)

2-Door Mega Top Prep 60
" Long 24-1/6 Pan

Short Form Specification

Item No.

2-door mega top refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 61x9x0,5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 24 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- shelf for 60" mega top, salad and undercounter PNC 880596
- shelf clips PNC 880611
- drawers kit for 60" mega top & undercounter PNC 880617

APPROVAL: _____

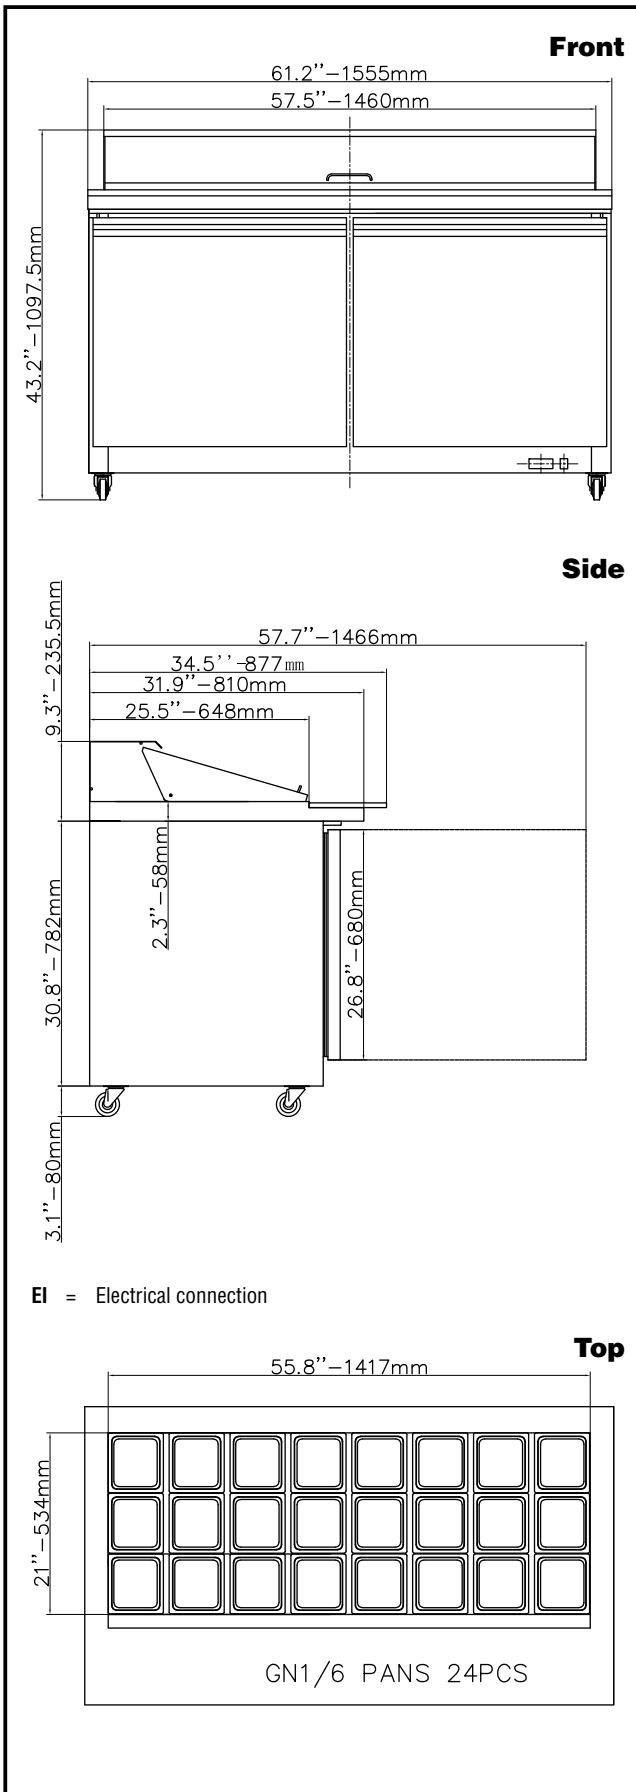

Electric

Supply voltage:

738261 (KCHMT60.24) 115 V/1 ph/60 Hz

Electrical power, max:

0.8 kW

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity: 15.5 cu.feet

Key Information:

Door hinges: 1 Left+1 Right

External dimensions, Width: 61 1/4" (1555 mm)

External dimensions, Depth: 34 1/2" (877 mm)

External dimensions, Height: 43 3/16" (1097.5 mm)

Number and type of doors: 2 Full

Internal Dimensions (depth): 23 13/16"

Internal Dimensions (height): 23 1/2"

Internal Dimensions (width): 56 1/4"

Shipping height: 47 1/4" (1200 mm)

Shipping weight: 408 lbs (185 kg)

Shipping volume: 61.5 ft³ (1.74 m³)

Number and type of grids (included): 2 - Vinyl-Coated Steel

Type of external material: Stainless Steel

Type of internal material: 304 AISI

Warranty: 3 / 5 years

Refrigeration Data

Compressor power:

Operating temperature min.: ISO 9001 °F

Operating temperature max.: 41 °F

Condenser type: Fin & tube

Defrost type: Auto Defrost

Sustainability

Current consumption: 7.5 Amps

Refrigerant type: R290

Refrigerant weight: 90 g