


#### COMMERCIAL

# Refrigeration Equipment Slide Top Bottle Cooler 65 " Long

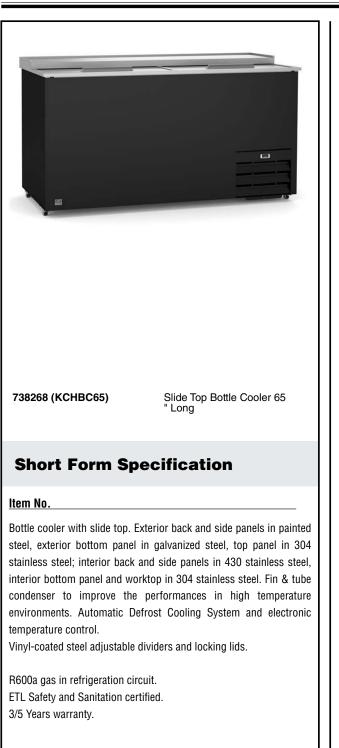

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
<u>AIA #</u>	

### **Main Features**

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Locking lids.

## Construction

- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

## **Sustainability**


- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.


#### APPROVAL:





# Refrigeration Equipment Slide Top Bottle Cooler 65 " Long

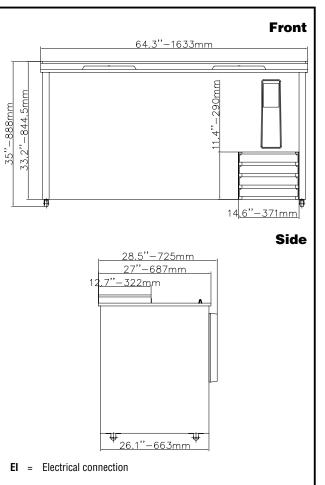



## Electric

Supply voltage: 738268 (KCHBC65)115 V/1 ph/60 HzFlectrical power, max:0.31 kWPlug type:USA NEMA 5-15PCapacity:Gross capacity:19 cu.feetKey Information:External dimensions, Width:64 5/16" (1633 mm)External dimensions, Depth:28 9/16" (725 mm)External dimensions, Height:34 15/16" (888 mm)Internal Dimensions (depth):26 1/16"Internal Dimensions (height):22 15/16"Internal Dimensions (width):60 3/8"Shipping height:39 3/4" (1010 mm)Shipping volume:44.34 ft3 (1.26 m3)Type of external material:Black Prepainted SteelType of internal material:Stainless SteelWarranty:3 / 5 yearsRefrigeration Data21 °FOperating temperature min.:32 °FOperating temperature min.:30 °FOperating temperature min.:70 g	LICOLIIC	
Gross capacity:19 cu.feetKey Information:External dimensions, Width:64 5/16" (1633 mm)External dimensions, Depth:28 9/16" (725 mm)External dimensions, Height:34 15/16" (888 mm)Internal Dimensions (depth):26 1/16"Internal Dimensions (height):22 15/16"Internal Dimensions (width):60 3/8"Shipping height:39 3/4" (1010 mm)Shipping weight:276 lbs (125 kg)Shipping volume:44.34 ft³ (1.26 m³)Type of external material:Black Prepainted SteelType of internal material:Stainless SteelWarranty:3 / 5 yearsBefrigeration Data1/6Operating temperature min.:32 °FOperating temperature min.:32 °FSustainabilityFin & tubeSustainability3 AmpsRefrigerant type:3 AmpsRefrigerant type:8600a	738268 (KCHBC65) Electrical power, max:	0.31 kW
Key Information:External dimensions, Width:64 5/16" (1633 mm)External dimensions, Depth:28 9/16" (725 mm)External dimensions, Height:34 15/16" (888 mm)Internal Dimensions (depth):26 1/16"Internal Dimensions (height):22 15/16"Internal Dimensions (width):60 3/8"Shipping height:39 3/4" (1010 mm)Shipping weight:276 lbs (125 kg)Shipping volume:44.34 ft³ (1.26 m³)Type of external material:Black Prepainted SteelType of internal material:Stainless SteelWarranty:3 / 5 yearsRefrigeration Data32 °FOperating temperature min.:32 °FOperating temperature max.:41 °FCondenser type:Fin & tubeSustainability3 AmpsRefrigerant type:3 AmpsRefrigerant type:R600a	Capacity:	
External dimensions, Width:64 5/16" (1633 mm)External dimensions, Depth:28 9/16" (725 mm)External dimensions, Height:34 15/16" (888 mm)Internal Dimensions (depth):26 1/16"Internal Dimensions (height):22 15/16"Internal Dimensions (width):60 3/8"Shipping height:39 3/4" (1010 mm)Shipping weight:276 lbs (125 kg)Shipping volume:44.34 ft³ (1.26 m³)Type of external material:Black Prepainted SteelWarranty:3 / 5 yearsRefrigeration Data1/6Compressor Horsepower:1/6Operating temperature min.:32 °FOperating temperature max.:41 °FCondenser type:Fin & tubeSustainability3 AmpsRefrigerant type:3 AmpsRefrigerant type:8600a	Gross capacity:	19 cu.feet
External dimensions, Depth:28 9/16" (725 mm)External dimensions, Height:34 15/16" (888 mm)Internal Dimensions (depth):26 1/16"Internal Dimensions (height):22 15/16"Internal Dimensions (width):60 3/8"Shipping height:39 3/4" (1010 mm)Shipping weight:276 lbs (125 kg)Shipping volume:44.34 ft³ (1.26 m³)Type of external material:Black Prepainted SteelType of internal material:Stainless SteelWarranty:3 / 5 yearsRefrigeration Data22 °FCompressor Horsepower:1/6Operating temperature min.:32 °FOperating temperature max.:41 °FCondenser type:Fin & tubeSustainability3 AmpsRefrigerant type:3 AmpsRefrigerant type:8600a	Key Information:	
Compressor Horsepower: 1/6   Operating temperature min.: 32 °F   Operating temperature max.: 41 °F   Condenser type: Fin & tube   Sustainability Current consumption:   Refrigerant type: R600a	External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material:	28 9/16" (725 mm) 34 15/16" (888 mm) 26 1/16" 22 15/16" 60 3/8" 39 3/4" (1010 mm) 276 lbs (125 kg) 44.34 ft <sup>3</sup> (1.26 m <sup>3</sup> ) Black Prepainted Steel Stainless Steel
Operating temperature min.: 32 °F   Operating temperature max.: 41 °F   Condenser type: Fin & tube   Sustainability   Current consumption: 3 Amps   Refrigerant type: R600a	<b>Refrigeration Data</b>	
Current consumption: 3 Amps Refrigerant type: R600a	Dperating temperature min.: Dperating temperature max.:	32 °F 41 °F
Refrigerant type: R600a	Sustainability	
	Refrigerant type:	R600a



Refrigeration Equipment Slide Top Bottle Cooler 65" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.