

## Refrigeration Equipment 2-Solid Door Back Bar Refrigerator Black 49" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738269 (KCHBB48S)

2-Solid Door Back Bar  
Refrigerator Black 49" Long

### Short Form Specification

Item No. \_\_\_\_\_

2-door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

### Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Two Shelves for 48" Back Bar (1 Right & 1 Left) PNC 880608
- Shelf clips (4-pack) PNC 880611

APPROVAL: \_\_\_\_\_

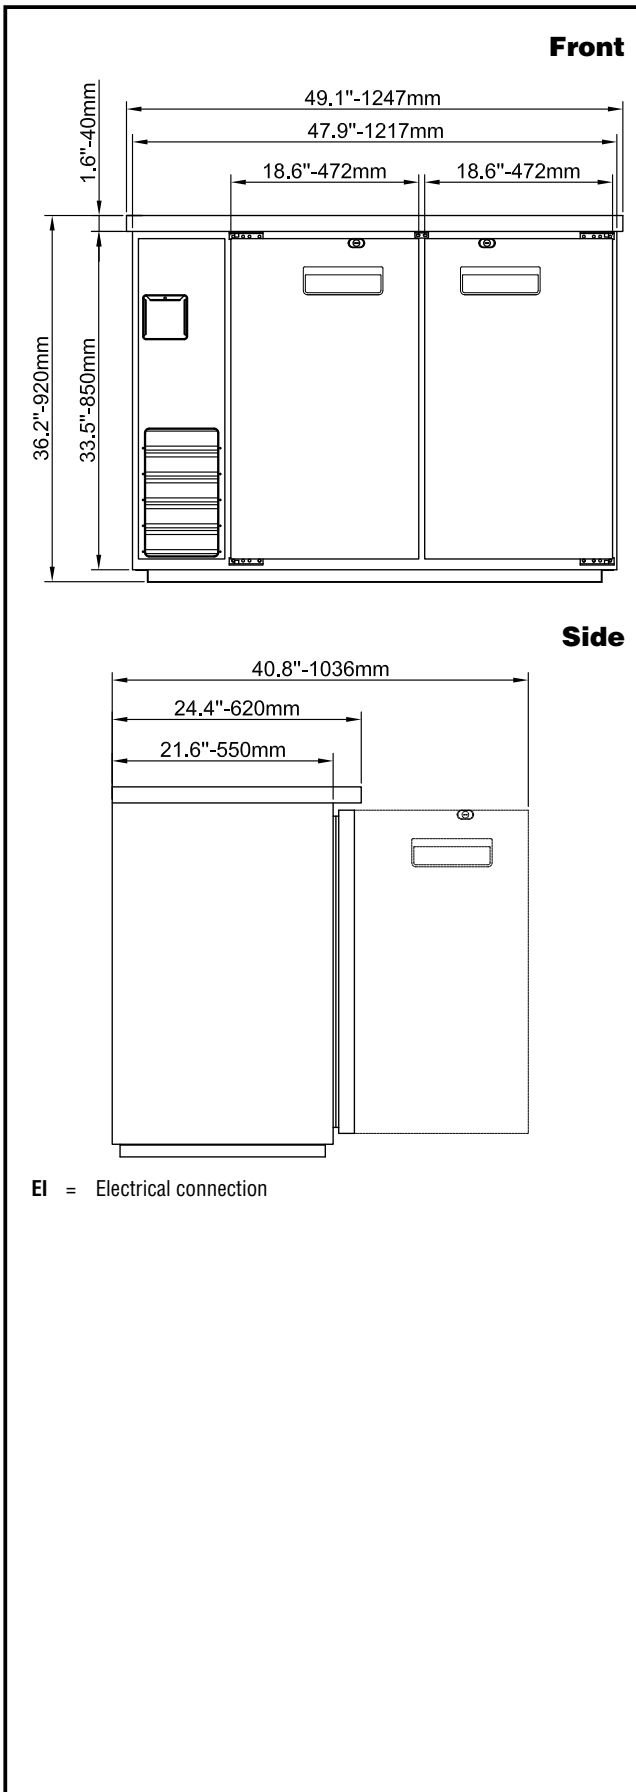

## Electric

Supply voltage:	738269 (KCHBB48S)	115 V/1 ph/60 Hz
Electrical power, max:		0.31 kW
Plug type:		USA NEMA 5-15P

## Capacity:

Gross capacity:	12.5 cu.feet
-----------------	--------------

## Key Information:

### Door hinges:

External dimensions, Width: 49 1/16" (1247 mm)

External dimensions, Depth: 24 7/16" (620 mm)

External dimensions, Height: 36 1/4" (920 mm)

Number and type of doors: 2 Full

Internal Dimensions (depth): 20 " / (508 mm)

Internal Dimensions (height): 28 " / (711.2 mm)

Internal Dimensions (width): 36 " / (914.4 mm)

Shipping height: 41 5/16" (1050 mm)

Shipping weight: 256 lbs (116 kg)

Shipping volume: 32.45 ft<sup>3</sup> (0.92 m<sup>3</sup>)

Number and type of grids (included): 4 - Vinyl-Coated Steel

Type of external material: Black Prepainted Steel

Type of internal material: Stainless Steel

Warranty: 3 / 5 years

Approvals: ETL C&US;ETL SANITATION

## Refrigeration Data

Current absorbed: 3 Amps

Compressor power: 1/5 hp

Operating temperature min.: 32 °F

Operating temperature max.: 41 °F

Condenser type: Fin & tube

Defrost type: Auto Defrost

## Sustainability

Current consumption: 3 Amps

Refrigerant type: R290

GWP Index: 3

Refrigerant weight: 110 g



Refrigeration Equipment  
2-Solid Door Back Bar Refrigerator Black 49" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.