

Refrigeration Equipment 1-Door Full Height Reach In Back Room Freezer 31" Long

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738279 (KCHRI25R1DFE)

1-Door Full Height Reach In
Back Room Freezer 31" Long

Short Form Specification

Item No.

1 full door freezer with door in 430 stainless steel, exterior back and bottom panels in galvanized steel, exterior side and top panels in prepainted steel; interior back, side, top and bottom panels in white High Impact Polystyrene. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key. Temperature range: - 8 °F min / 5 °F max.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- PVC shelves.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Included Accessories


- 3 of Shelf for 25" Reach-In PNC 880678

Optional Accessories


- Shelf clips (4-pack) PNC 880611 ☐
- Shelf for 25" Reach-In PNC 880678 ☐

APPROVAL: _____

Front

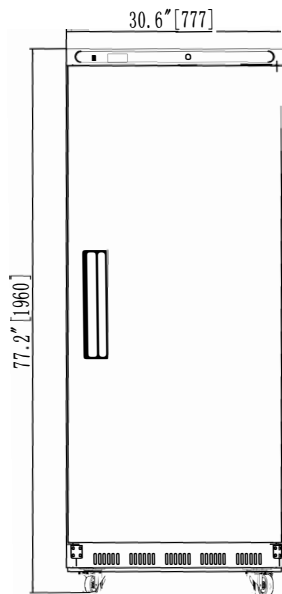


Side

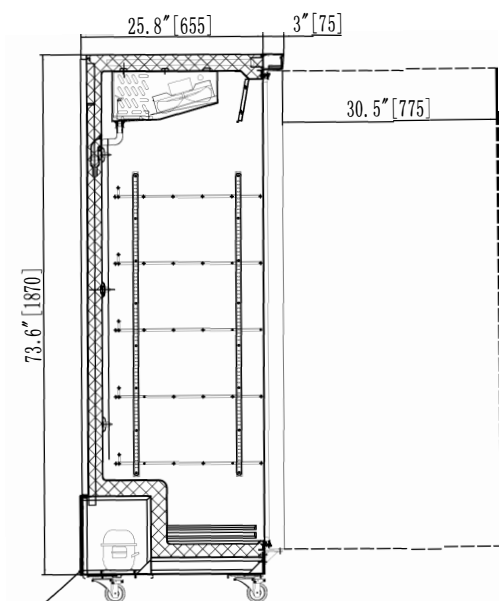

EI = Electrical connection

Top

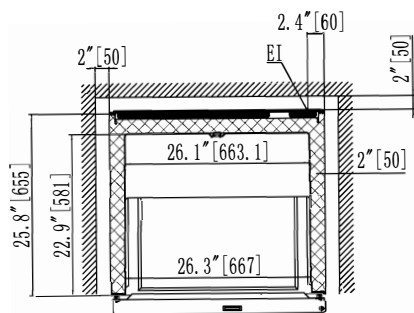

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.41 kW
Plug type:	USA NEMA 5-15P

Capacity:

Gross capacity:	22.7 cu.feet
-----------------	--------------

Key Information:

Number and type of grids (included):	3 - Vinyl-Coated steel
Warranty:	3 / 5 years
Door hinges:	Right Side
External dimensions, Width:	30 9/16" (777 mm)
External dimensions, Depth:	28 3/4" (730 mm)
External dimensions, Height:	77 3/16" (1960 mm)
Number and type of doors:	1 Full
Internal Dimensions (depth):	22 3/4" / (578 mm)
Internal Dimensions (height):	65 3/8" / (1660 mm)
Internal Dimensions (width):	26 3/8" / (670 mm)
Shipping height:	82 11/16" (2100 mm)
Shipping weight:	284 lbs (129 kg)
Shipping volume:	47.34 ft³ (1.34 m³)
Type of external material:	Prepainted Steel
Type of internal material:	High Impact White Polystyrene
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	-10.01 °F
Compressor power:	3/4 hp
Operating temperature max.:	0 °F
Defrost type:	auto defrost

Sustainability

Current consumption:	8 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	119 g

