



COMMERCIAL

# Refrigeration Equipment Reach-In Freezer, 1 Door, 25 cu.ft - Stainless Steel (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738279 (KCHRI25R1DFE)

1-Door Full Height Reach In  
Back Room Freezer 31" Long

## Short Form Specification

Item No. \_\_\_\_\_

1 full door freezer with door and bottom panel in 430 stainless steel, exterior back, side and top panels in prepainted steel; interior back, side, top and bottom panels in white High Impact Polystyrene.

Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key. Temperature range: - 8 °F min / 5 °F max.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

## Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

## Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- PVC shelves.

## Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

## Optional Accessories

- shelf clips PNC 880611

APPROVAL: \_\_\_\_\_


Part of




Electrolux  
Professional  
Group

**Kelvinator Commercial**  
www.kelvinatorcommercial.com

**Front**

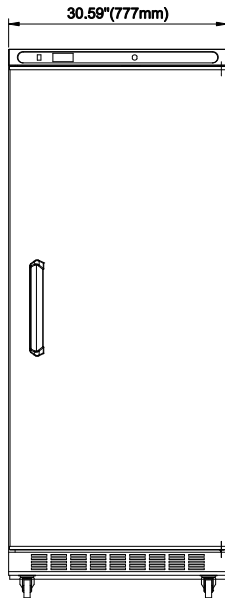


**Side**

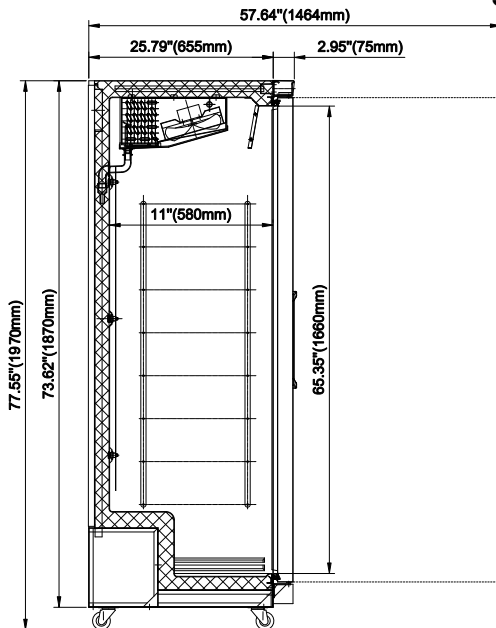

EI = Electrical connection

**Top**



## Electric

**Supply voltage:**

738279 (KCHRI25R1DFE) 115 V/1 ph/60 Hz

**Plug type:**

USA NEMA 5-15P

## Key Information:

|   |  |
|---|--|
| <b>Door hinges:</b>                         | Right Side                                   |
| <b>Capacity (Cu. Ft.)</b>                   | 25   |
| <b>External dimensions, Width:</b>          | 30 9/16" (776.99 mm)                         |
| <b>External dimensions, Depth:</b>          | 28 3/4" (730 mm)                             |
| <b>External dimensions, Height:</b>         | 77 9/16" (1970 mm)                           |
| <b>Number and type of doors:</b>            | 1 ; Full                                     |
| <b>Internal Dimensions (depth):</b>         | 22 3/4"                                      |
| <b>Internal Dimensions (height):</b>        | 65 3/8"                                      |
| <b>Internal Dimensions (width):</b>         | 26 3/8"                                      |
| <b>Shipping height:</b>                     | 82 11/16" (2100.07 mm)                       |
| <b>Shipping weight:</b>                     | 278 lbs (126 kg)                             |
| <b>Shipping volume:</b>                     | 47.95 ft <sup>3</sup> (1.36 m <sup>3</sup> ) |
| <b>Number and type of grids (included):</b> | 3 - Vinyl-Coated steel                       |
| <b>Type of external material:</b>           | Prepainted Steel                             |
| <b>Type of internal material:</b>           | White Polystyrene                            |
| <b>External Door material:</b>              | 430 AISI                                     |
| <b>Warranty:</b>                            | 3 / 5 years                                  |
| <b>External door material:</b>              | Stainless Steel                              |

## Refrigeration Data

|                                    |              |
|------------------------------------|--------------|
| <b>Compressor Horsepower:</b>      | 1/6          |
| <b>Operating temperature min.:</b> | -7.6 °F      |
| <b>Operating temperature max.:</b> | 5 °F         |
| <b>Condenser type:</b>             | Fin & tube   |
| <b>Defrost type:</b>               | auto defrost |

## Sustainability

|                             |        |
|-----------------------------|--------|
| <b>Current consumption:</b> | 7 Amps |
| <b>Refrigerant type:</b>    | ;R290  |

