

COMMERCIAL

Refrigeration Equipment 4-Half Door Full Height Refrigerator 54" Long



738282 (KCHRI54R4HDR)

4-Half Door Full Height Refrigerator 54" Long

Short Form Specification

Item No.

4 half door refrigerator with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

TEM #	
NODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- 1 ADJUSTABLE FOOT
- Shelf for 54" and 81" (left/right) PNC 880591 Reach-In (Solid Door)
- Shelf clips (4-pack) PNC 880611


APPROVAL:

Part of

PNC 206445



Refrigeration Equipment 4-Half Door Full Height Refrigerator 54" Long

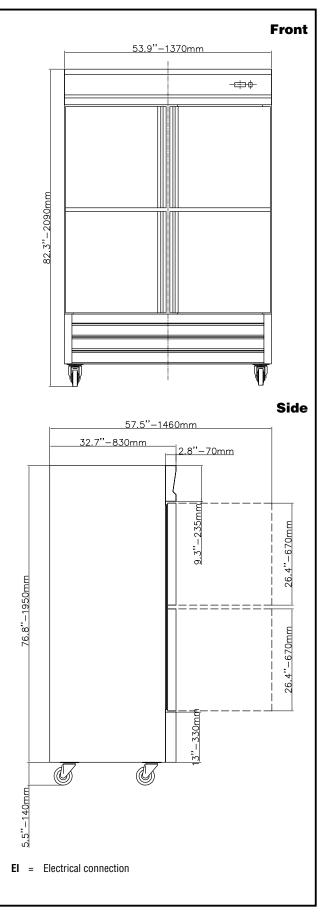

Electric

Supply voltage: 738282 (KCHRI54R4HDR) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.47 kW USA NEMA 5-15P
Capacity:	
Gross capacity:	49 cu.feet
Key Information:	
Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material: Warranty: Approvals Refrigeration Data	2 Left+2 Right 53 15/16" (1370 mm) 32 11/16" (830 mm) 83 " (2108 mm) 4 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 49 3/8" / (1254.76 mm) 84 5/8" (2150 mm) 492 lbs (223 kg) 92.27 ft ³ (2.61 m ³) 6 - Vinyl-Coated Steel Stainless Steel 304 AISI 3 / 5 years ETL C&USETL SANITATION
Compressor power:	1/3 hp
Operating temperature min.:	32 °F

Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type:

Sustainability

Current consumption: Refrigerant type: GWP Index: Refrigerant weight: 4.5 Amps R290 3 105 g

41 °F

Fin & tube

Auto Defrost

Refrigeration Equipment 4-Half Door Full Height Refrigerator 54" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.