

## Refrigeration Equipment 2-Half Door Full Height Freezer 27" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738285 (KCHRI27R2HDF)

2-Half Door Full Height Freezer 27" Long

### Short Form Specification

Item No. \_\_\_\_\_

2 half door freezer with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self closing and on-site reversible door feature with lock and key. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

### Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445
- Shelf for 27" Reach-In (Solid Door) PNC 880590
- Shelf clips (4-pack) PNC 880611

APPROVAL: \_\_\_\_\_

## Front

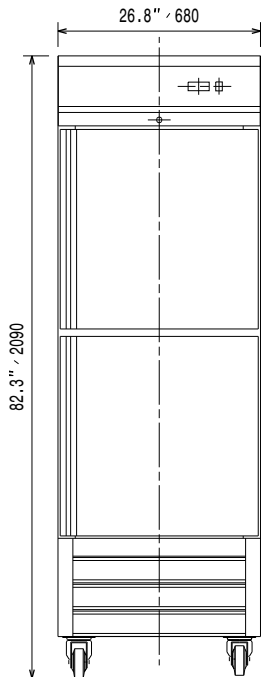

## Side

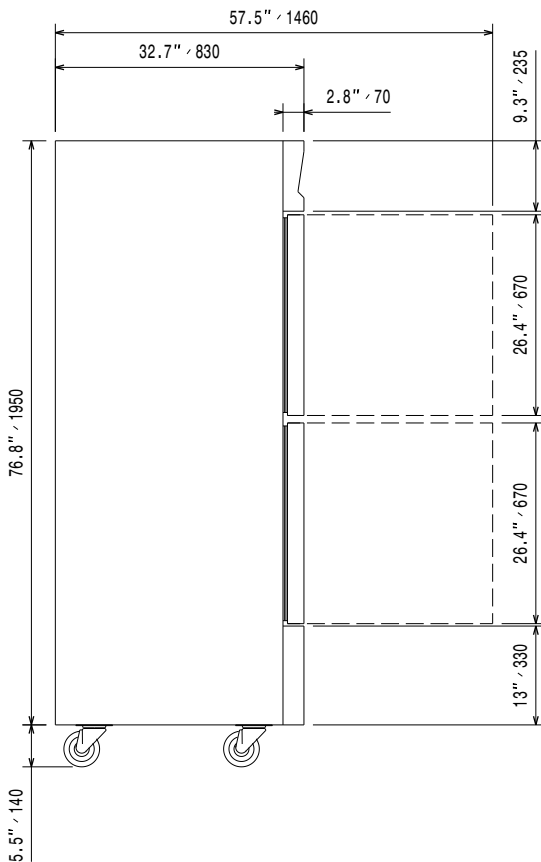

EI = Electrical connection

## Electric

<b>Supply voltage:</b>	
738285 (KCHRI27R2HDF)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.83 kW
<b>Plug type:</b>	USA NEMA 5-15P

## Capacity:

<b>Gross capacity:</b>	21 cu.feet
------------------------	------------

## Key Information:

<b>Door hinges:</b>	Right Side
<b>External dimensions, Width:</b>	26 3/4" (680 mm)
<b>External dimensions, Depth:</b>	32 11/16" (830 mm)
<b>External dimensions, Height:</b>	83 " (2108 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	27 1/2" / (698.5 mm)
<b>Internal Dimensions (height):</b>	50 3/16" / (1275.08 mm)
<b>Internal Dimensions (width):</b>	22 3/16" / (563.88 mm)
<b>Shipping height:</b>	84 5/8" (2150 mm)
<b>Shipping weight:</b>	331 lbs (150 kg)
<b>Shipping volume:</b>	49.91 ft <sup>3</sup> (1.41 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	3 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	304 AISI
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Compressor power:</b>	3/4 hp
<b>Operating temperature min.:</b>	-10.01 °F
<b>Operating temperature max.:</b>	0 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	8 Amps
<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	110 g

Refrigeration Equipment  
2-Half Door Full Height Freezer 27" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

