

COMMERCIAL

Refrigeration Equipment Beer Dispenser with 2 door and 1 beer column (R290)



738296 (KCHBBD2D1T)

2-Door 1-Tower Draft Box 49 " Long

Short Form Specification

Item No.

Beer dispenser with 2 doors and 1 column. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel in painted steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control.

Vinyl heavy duty adjustable, easy to handle and clean shelves.

R290 gas in refrigeration circuit.ETL Safety and Sanitation certified.3/5 Years warranty.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- External digital temperature display.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Self-closing door with 90-degree stay-open feature.
- Lockable door.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty casters.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL:


Part of

Electrolux Professional Group


Kelvinator Commercial www.kelvinatorcommercial.com



Refrigeration Equipment Beer Dispenser with 2 door and 1 beer column (R290)

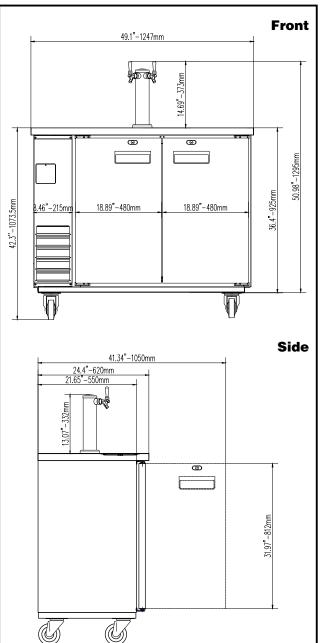

EI = Electrical connection



Intertek

Intertek

15A 125V NEMA 5-15P

Intertek

115 V/1 ph/60 Hz 0.3 kW USA NEMA 5-15P
12.5 cu.feet
49 1/16" (1247 mm) 24 7/16" (620 mm) 56 15/16" (1446.5 mm) 2 Full 20 1/16" 29 3/8" 39 3/16" 58 11/16" (1490 mm) 282 lbs (128 kg) 4 - Vinyl-Coated Steel Black Prepainted Steel Stainless Steel 3 / 5 years
1/5 35.6 °F 42.8 °F Fin & tube
3 Amps R290 110 g

Refrigeration Equipment Beer Dispenser with 2 door and 1 beer column (R290)