

## Refrigeration Equipment 3-Door 2-Tower Draft Box 73 " Long

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738298 (KCHBBD3D2T)

3-Door 2-Tower Draft Box 73  
" Long

### Short Form Specification

**Item No.** \_\_\_\_\_

3-door Beer dispenser with 2 columns. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments.

Automatic Defrost Cooling System and temperature control.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

### Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

### Construction

- Self-closing door with 90-degree stay-open feature.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty casters.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

### Optional Accessories

- Draft Tower; Double Faucet PNC 880677 ☐

APPROVAL: \_\_\_\_\_

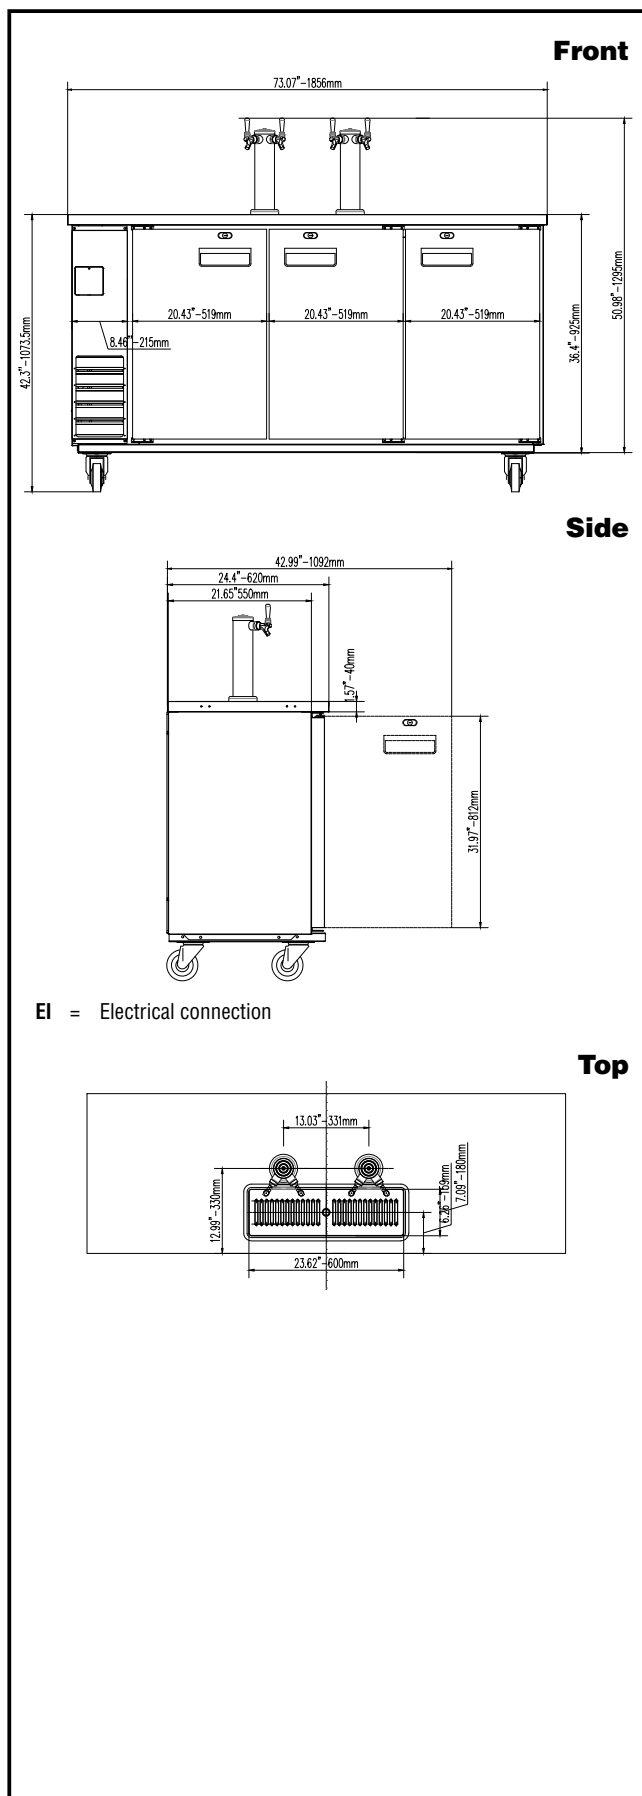

### Electric

|                        |                  |
|------------------------|------------------|
| Supply voltage:        | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.31 kW          |
| Plug type:             | USA NEMA 5-15P   |

### Capacity:

|                 |              |
|-----------------|--------------|
| Gross capacity: | 20.8 cu.feet |
|-----------------|--------------|

### Key Information:

|                                      |  |
|--------------------------------------|--|
| Number and type of grids (included): | 4 - Vinyl-Coated Steel                       |
| Warranty:                            | 3 / 5 years                                  |
| Door hinges:                         | 1 Left+2 Right                               |
| External dimensions, Width:          | 73 1/16" (1856 mm)                           |
| External dimensions, Depth:          | 24 7/16" (620 mm)                            |
| External dimensions, Height:         | 56 15/16" (1446.5 mm)                        |
| Number and type of doors:            | 3 Full                                       |
| Internal Dimensions (depth):         | 20 " / (508 mm)                              |
| Internal Dimensions (height):        | 28 " / (711.2 mm)                            |
| Internal Dimensions (width):         | 60 " / (1524 mm)                             |
| Shipping height:                     | 58 11/16" (1490 mm)                          |
| Shipping weight:                     | 375 lbs (170 kg)                             |
| Shipping volume:                     | 67.83 ft <sup>3</sup> (1.92 m <sup>3</sup> ) |
| Type of external material:           | Black Prepainted Steel                       |
| Type of internal material:           | Stainless Steel                              |
| Approvals                            | ETL C&US;ETL SANITATION                      |

### Refrigeration Data

|                             |                     |              |
|-----------------------------|---------------------|--------------|
| Current absorbed:           | 738298 (KCHBBD3D2T) | 3 Amps       |
| Condenser type:             |                     | Fin & tube   |
| Operating temperature min.: |                     | 32 °F        |
| Compressor power:           |                     | 1/5 hp       |
| Operating temperature max.: |                     | 41 °F        |
| Defrost type:               |                     | Auto Defrost |

### Sustainability

|                     |       |
|---------------------|-------|
| Refrigerant type:   | R290  |
| GWP Index:          | 3     |
| Refrigerant weight: | 130 g |