



COMMERCIAL

# Refrigeration Equipment 2-Door Refrigerated Work Top 48" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738300 (KCHUCWT48R)

2-Door Refrigerated Work Top  
48" Long

## Short Form Specification

Item No. \_\_\_\_\_

2-door refrigerated counter top with exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel.

Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

## Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

## Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


## Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

## Optional Accessories

- shelf for 48" and 72" (left/right) mega top, salad and undercounter PNC 880597
- shelf clips PNC 880611
- drawers kit for 48" mega top & undercounter PNC 880616

APPROVAL: \_\_\_\_\_

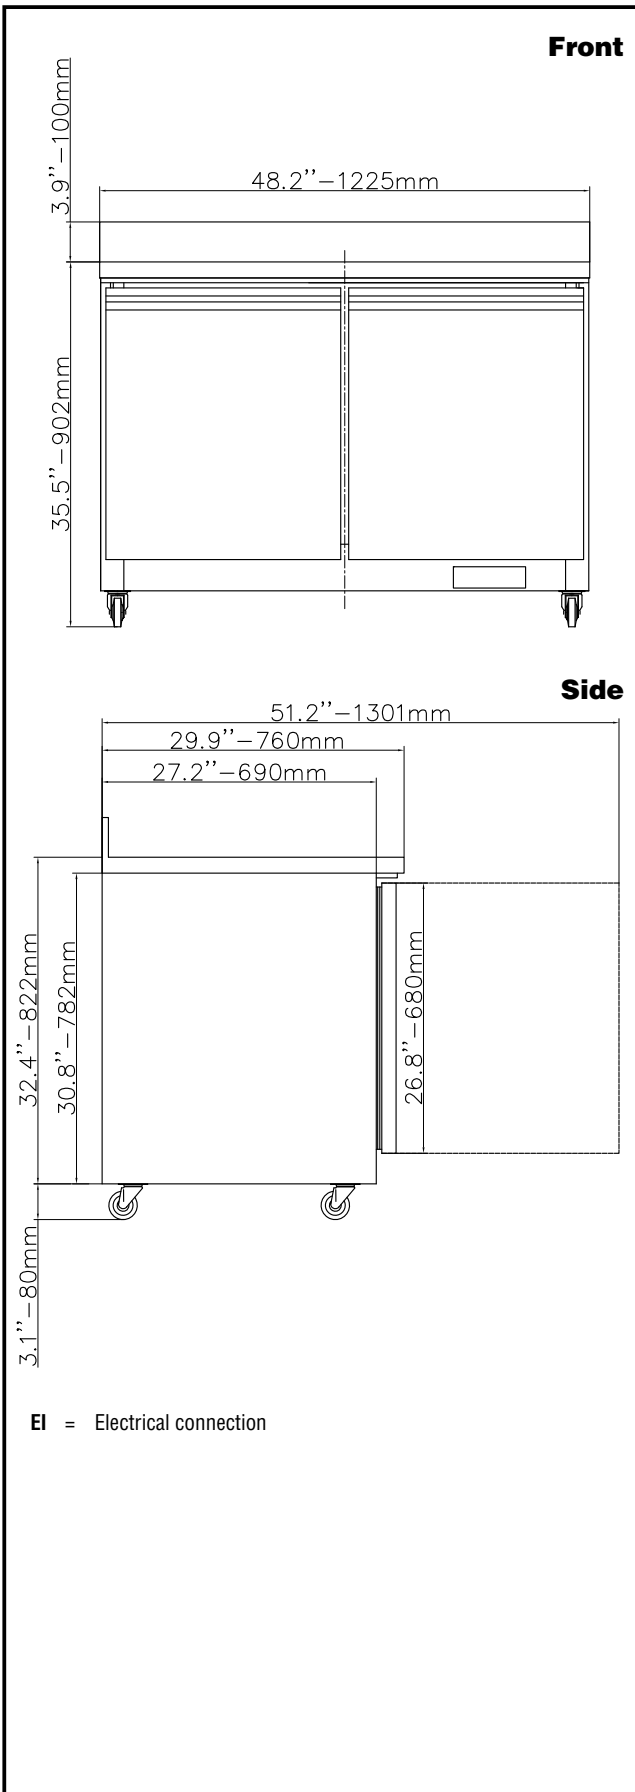

## Electric

<b>Supply voltage:</b>	738300 (KCHUCWT48R)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>		0.3 kW
<b>Plug type:</b>		USA NEMA 5-15P

## Key Information:

<b>Door hinges:</b>	1 Left+1 Right
<b>Capacity (Cu. Ft.)</b>	48
<b>External dimensions, Width:</b>	48 1/4" (1225 mm)
<b>External dimensions, Depth:</b>	29 15/16" (760 mm)
<b>External dimensions, Height:</b>	39 7/16" (1002 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	24 13/16"
<b>Internal Dimensions (height):</b>	24 7/16"
<b>Internal Dimensions (width):</b>	43 5/16"
<b>Shipping height:</b>	42 1/8" (1070 mm)
<b>Shipping weight:</b>	265 lbs (120 kg)
<b>Shipping volume:</b>	38.24 ft <sup>3</sup> (1.08 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	2 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	304 AISI
<b>Warranty:</b>	3 / 5 years

## Refrigeration Data

<b>Compressor Horsepower:</b>	1/6
<b>Operating temperature min.:</b>	ISO 9001 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	3 Amps
<b>Refrigerant type:</b>	R600a
<b>Refrigerant weight:</b>	85 g