



COMMERCIAL

Refrigeration Equipment 2-Hinged Glass Door Full Height Merchandiser Freezer 49.5" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738309 (KCHGM48F)

2-Hinged Glass Door Full
Height Merchandiser Freezer
49.5" Long

Short Form Specification

Item No. _____

2-glass door freezer with exterior back and bottom panel in galvanized steel, exterior side and top in painted steel; interior back, side, top and interior bottom panels in 304 stainless steel.

Electronic control.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- shelf for 48" and 72" (left/right) merchandiser PNC 880594
- shelf clips PNC 880611

APPROVAL: _____

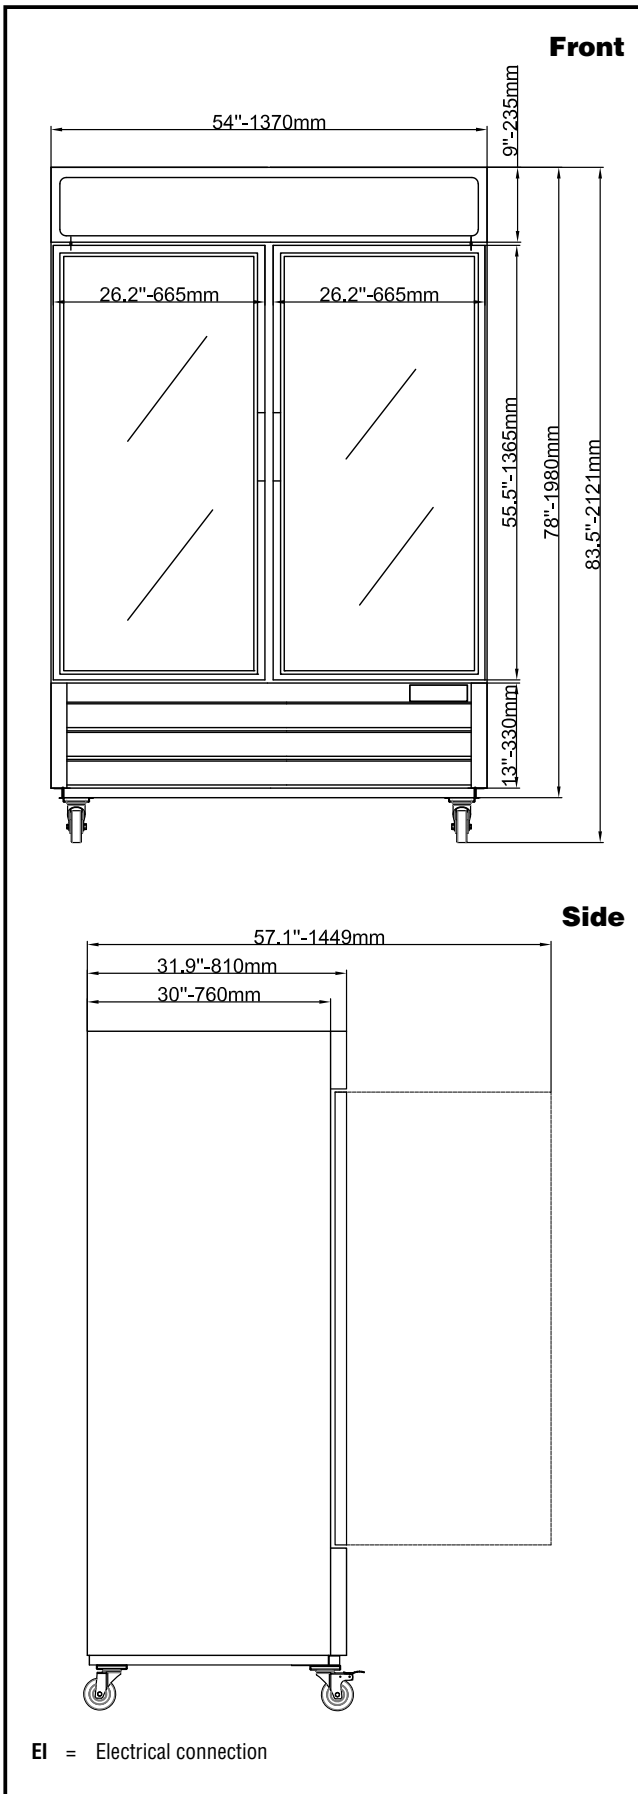

Electric

Supply voltage:	738309 (KCHGM48F)	115 V/1 ph/60 Hz
Electrical power, max:		0.9 kW
Plug type:		USA NEMA 5-15P

Key Information:

Capacity (Cu.Ft.)	49
Door hinges:	1 Left+1 Right
External dimensions, Width:	49 3/8" (1254 mm)
External dimensions, Depth:	27 9/16" (700 mm)
External dimensions, Height:	59 1/16" (1501 mm)
Number and type of doors:	2 Glass
Internal Dimensions (depth):	27 9/16"
Internal Dimensions (height):	59 1/16"
Internal Dimensions (width):	49 3/8"
Shipping height:	85 13/16" (2180 mm)
Shipping weight:	580 lbs (263 kg)
Shipping volume:	96.06 ft ³ (2.72 m ³)
Number and type of grids (included):	4 - Vinyl-Coated Steel
Type of external material:	Black Prepainted Steel
Type of internal material:	White Prepainted Aluminium
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	3/4
Operating temperature min.:	-7.6 °F
Operating temperature max.:	-4 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Current consumption:	9 Amps
Refrigerant type:	R290
Refrigerant weight:	150 g