



COMMERCIAL

# Refrigeration Equipment 1-Door Glass Froster Slide Top 24" +33/+41°F BLACK-R600a

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738327 (KCHGF24)

Slide Top Mug/Glass Froster  
24" Long

## Short Form Specification

Item No. \_\_\_\_\_

24" wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids. R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.


## Main Features

- ADA Height Compliant
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly

## Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

APPROVAL: \_\_\_\_\_

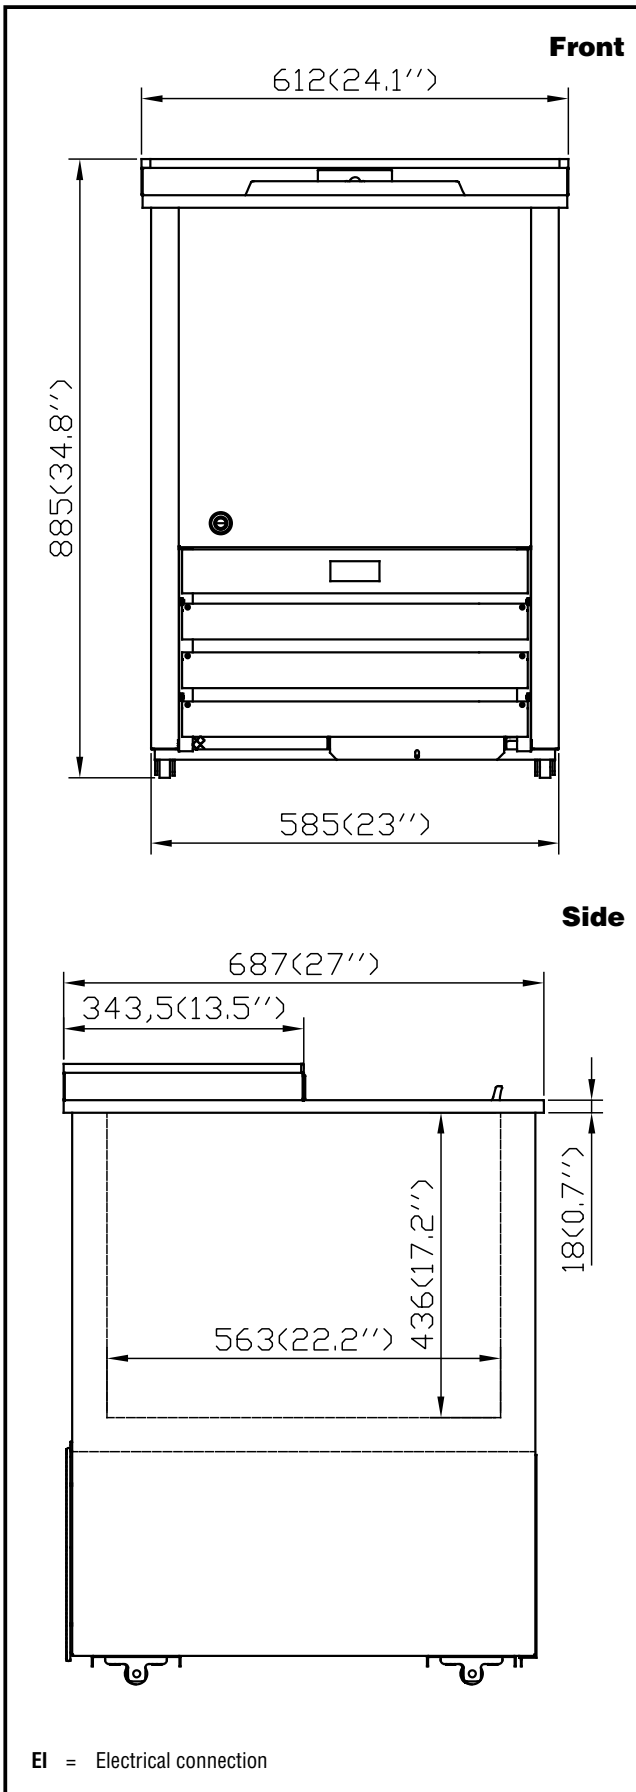

## Electric

### Supply voltage:

738327 (KCHGF24) 120 V/1 ph/60 Hz

### Electrical power, max:

0.7 kW

### Plug type:

NEMA 5-15

## Capacity:

### Gross capacity:

3.5 cu.feet

## Key Information:

### Capacity:

3.53148 cu.ft.

### External dimensions, Width:

26 3/4" (680 mm)

### External dimensions, Depth:

25 9/16" (650 mm)

### External dimensions, Height:

41 5/16" (1050 mm)

### Internal Dimensions (depth):

14 3/4"

### Internal Dimensions (height):

13 3/4"

### Internal Dimensions (width):

16 7/8"

### Shipping height:

40 3/16" (1020 mm)

### Shipping weight:

201 lbs (91 kg)

### Shipping volume:

18.48 ft<sup>3</sup> (0.52 m<sup>3</sup>)

## Refrigeration Data

### Operating temperature min.:

-2 °F

### Operating temperature max.:

1.9 °F

## Sustainability

### Current consumption:

### Refrigerant type:

R290