



COMMERCIAL

# Refrigeration Equipment Slide Top Mug/Glass Froster 24" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738327 (KCHGF24)

Slide Top Mug/Glass Froster  
24" Long

## Short Form Specification

Item No. \_\_\_\_\_

24" wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids. R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

## Main Features

- ADA Height Compliant
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly


## Construction

- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

## Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: \_\_\_\_\_

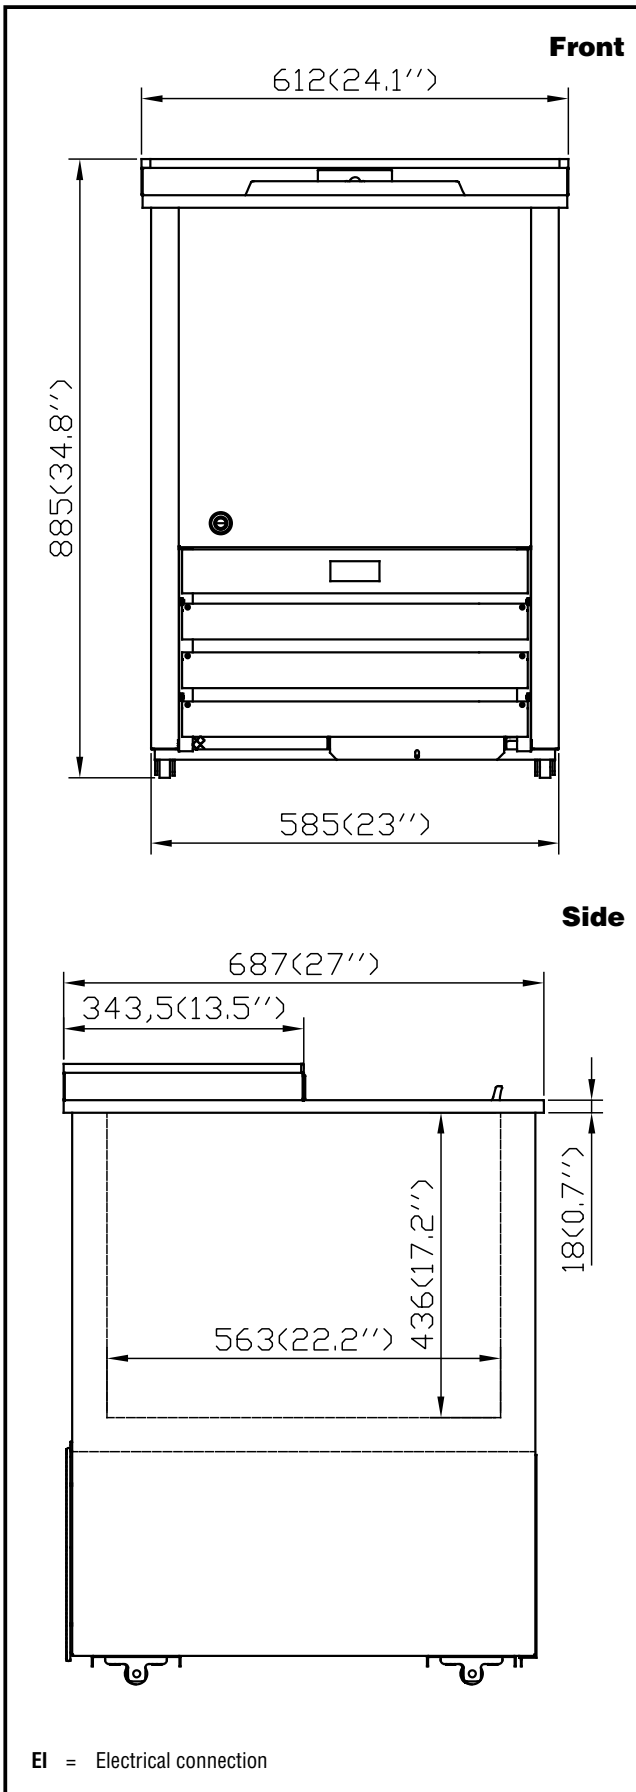

## Electric

Supply voltage:	120 V/1 ph/60 Hz
738327 (KCHGF24)	
Electrical power, max:	0.7 kW
Plug type:	NEMA 5-15

## Capacity:

Gross capacity:	3.5 cu. feet
-----------------	--------------

## Key Information:

Capacity:	3.53148 cu.ft.
External dimensions, Width:	26 3/4" (680 mm)
External dimensions, Depth:	25 9/16" (650 mm)
External dimensions, Height:	41 5/16" (1050 mm)
Internal Dimensions (depth):	14 3/4"
Internal Dimensions (height):	13 3/4"
Internal Dimensions (width):	16 7/8"
Shipping height:	40 3/16" (1020 mm)
Shipping weight:	148 lbs (67 kg)
Shipping volume:	18.48 ft <sup>3</sup> (0.52 m <sup>3</sup> )

## Refrigeration Data

Operating temperature min.:	-2 °F
Operating temperature max.:	1.9 °F

## Sustainability

Current consumption:	
Refrigerant type:	R290