



COMMERCIAL

Refrigeration Equipment Slide Top Mug/Glass Froster 24" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738327 (KCHGF24)

Slide Top Mug/Glass Froster
24" Long

Short Form Specification

Item No. _____

24" wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids. R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

Main Features

- ADA Height Compliant
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly


Construction

- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: _____

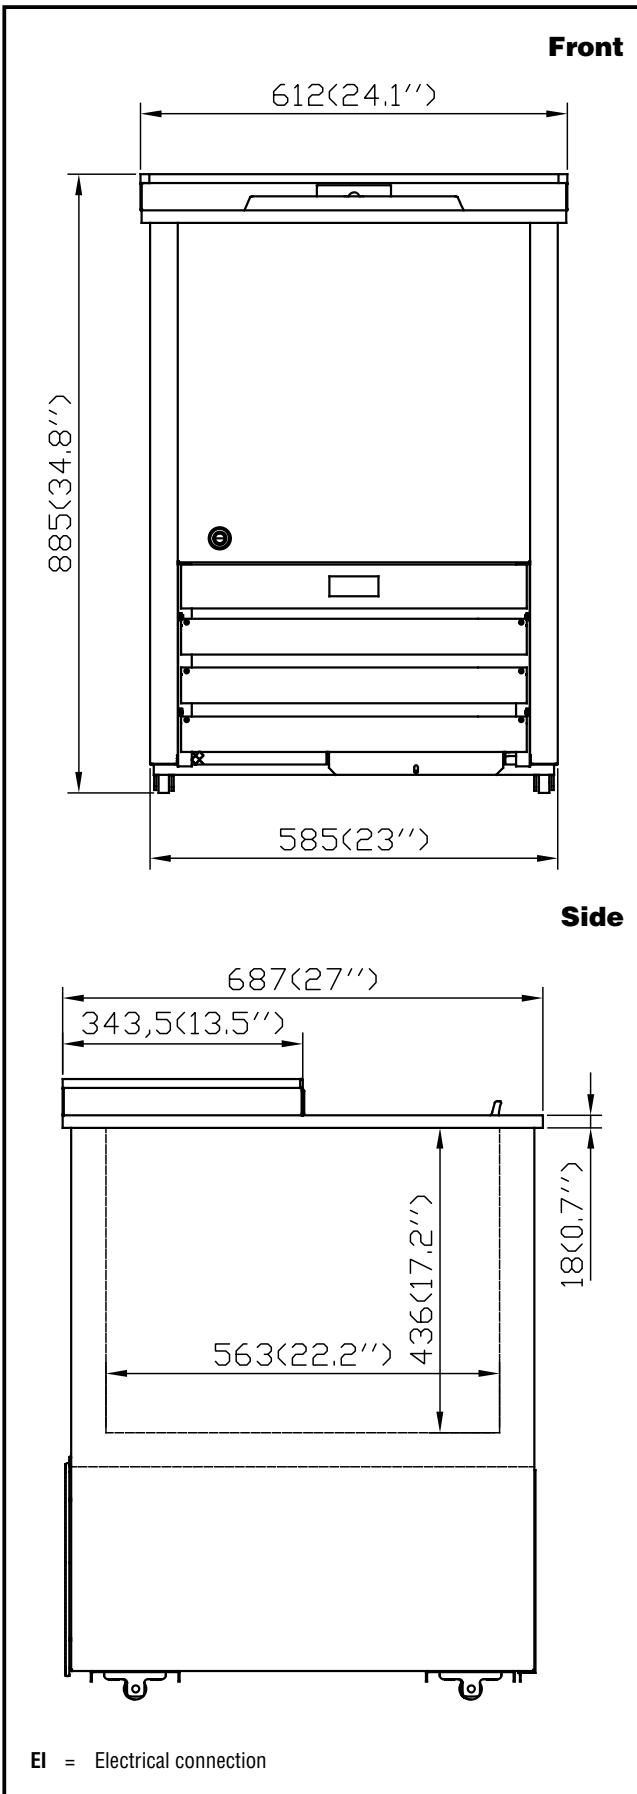

Electric

Supply voltage:	115 V/1 ph/60 Hz
738327 (KCHGF24)	
Electrical power, max:	0.66 kW
Plug type:	NEMA 5-15

Capacity:

Gross capacity:	3 cu.feet
-----------------	-----------

Key Information:

Capacity:	2.95585 cu.ft.
External dimensions, Width:	24 " (609 mm)
External dimensions, Depth:	27 1/16" (687 mm)
External dimensions, Height:	34 13/16" (885 mm)
Internal Dimensions (depth):	14 3/4"
Internal Dimensions (height):	13 3/4"
Internal Dimensions (width):	16 7/8"
Shipping height:	39 3/8" (1000 mm)
Shipping weight:	148 lbs (67 kg)
Shipping volume:	16.98 ft ³ (0.48 m ³)

Refrigeration Data

Operating temperature min.:	-5.01 °F
Operating temperature max.:	-2 °F

Sustainability

Current consumption:	1.5 Amps
Refrigerant type:	R600a