## **CLASSIC 3 groups**



#### Ref602647 (CLASSIC3UL)

**Traditional Espresso Machine** 

- 3 Groups
- $\cdot$  Inox Steam Hot Water Inox Steam
- $\cdot \log$
- · 220 V 1N 60~Hz 4,3kW
- $\cdot$  UL/NSF Certified

#### **General Features**

The Classic is the perfect traditional espresso machine to guarantee topquality espresso and consistency even in busy periods.

With elegant lines and reliable technologies appreciated by coffee professionals, the Classic is made even more attractive by its quality/price ratio. The Classic is available in 1, 2 or 3 group configurations.

## **CLASSIC 3 groups**

#### **Main Features**

- Maestro brew group: directly to boiler group heads are mounted for shot temperature stability.
- Large cup warming capacity: integrated cup warmer on the top of the machines.
- 2 stainless steel Steam arms / 2 Steam switches on, off and pulse positions.
- 4 programmable volume keys per group + Semi-automatic key for each group for manual control.
- Automatic cleaning program.
- Heavy duty components and welded construction, a direct mounted boiler group head for thermal stability and reliable extraction, easy access to components for uncomplicated servicability, and unlimited steam.

#### Construction

• Built-in cup warmer.

#### **Optional Accessories**


• KIT OF RAISED 3" FEET

PNC 871041

# UNIC

## **CLASSIC 3 groups**

ElectricSupply voltage:220 V/1 ph/60 HzElectrical power, max:4.3 kWPlug type:4.3 kWWater:Cold water temperature (min/max):Cold water temperature (min/max):5 / 60 °CKey Information:External dimensions, Height:20 " (580 mm)External dimensions, Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping weight:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)Shipping volume:0.8 m³		
Electrical power, max:4.3 kWPlug type:Water:Water:SolutionCold water temperature (min/max):5 / 60 °CKey Information:5 / 60 °CKey Information:20 " (580 mm)External dimensions, Height:20 " (580 mm)External dimensions, Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)	Electric	
Plug type: Water: Cold water temperature (min/max): 5 / 60 °C Key Information: External dimensions, Height: 20 " (580 mm) External dimensions, Weight: 165 lbs (76 kg) Net weight: 165 lbs (76 kg) Net weight: 52 " (1320 mm) Shipping depth: 29 1/2" (750 mm) Shipping height: 33 1/16" (840 mm) Shipping weight: 209 lbs (97 kg)	Supply voltage:	220 V/1 ph/60 Hz
Water:Cold water temperature (min/max):5 / 60 °CKey Information:External dimensions, Height:20 " (580 mm)External dimensions, Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)	Electrical power, max:	4.3 kW
Cold water temperature (min/max):5 / 60 °CKey Information:5External dimensions, Height:20 " (580 mm)External dimensions, Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)	Plug type:	
(min/max):5 / 60 °CKey Information:20 " (580 mm)External dimensions, Height:20 " (580 mm)External dimensions, Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)	Water:	
External dimensions, Height:20 " (580 mm)External dimensions, Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)		
Height: 20 " (580 mm)   External dimensions, 165 lbs (76 kg)   Net weight: 165 lbs (76 kg)   Shipping width: 52 " (1320 mm)   Shipping depth: 29 1/2" (750 mm)   Shipping height: 33 1/16" (840 mm)   Shipping weight: 209 lbs (97 kg)	Key Information:	
Weight:165 lbs (76 kg)Net weight:165 lbs (76 kg)Shipping width:52 " (1320 mm)Shipping depth:29 1/2" (750 mm)Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)	,	20 " (580 mm)
Shipping width: 52 " (1320 mm)   Shipping depth: 29 1/2" (750 mm)   Shipping height: 33 1/16" (840 mm)   Shipping weight: 209 lbs (97 kg)	,	165 lbs (76 kg)
Shipping depth: 29 1/2" (750 mm)   Shipping height: 33 1/16" (840 mm)   Shipping weight: 209 lbs (97 kg)	Net weight:	165 lbs (76 kg)
Shipping height:33 1/16" (840 mm)Shipping weight:209 lbs (97 kg)	Shipping width:	52 " (1320 mm)
Shipping weight:209 lbs (97 kg)	Shipping depth:	29 1/2" (750 mm)
	Shipping height:	33 1/16" (840 mm)
<b>Shipping volume:</b> 0.8 m <sup>3</sup>	Shipping weight:	_
	Shipping volume:	0.8 m <sup>3</sup>

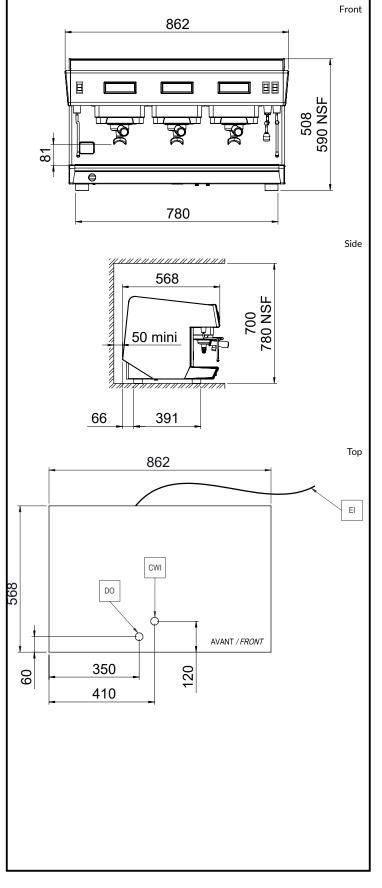

#### **Certifications**





The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.01

Electrolux Part of Professional Group

**UNIC**