

## TANGO ST DUO 222, Steamair



### Ref602939 (TANGODUO222SUL)

Super Automatic Espresso Machine

- 2 Groups
- 2 Grinders
- Cappuccinators - Steamair - Std Hot Water
- 208-240V 1N 60~Hz
- UL/NSF Certified
- Inox

### General Features

The Tango® ST delivers exceptional coffee quality with the patented Tango® Dual Infusion Chamber, engineered for high performance and precision. Ideal for busy environments like cafes, bars, and hospitality venues, this super-automatic machine offer unparalleled reliability and consistency, creating outstanding espresso every time. With intuitive controls and robust features, the Tango® ST makes exceptional coffee accessible for both barista and self-service settings.

# TANGO ST DUO 222, Steamair

## Main Features

- To obtain milk based beverages, the side milk refrigerator is needed.
- 2 coffee grinders (2 x 1,7 kg coffee hoppers).
- Steamair milk auto-frother programmable outlet.
- 2 groups full-automatic machine.
- 2 x 6.5 liter steam/coffee boiler.
- Programmable hot water.
- The machine is able to create and compose a choice of 96 drinks menu and delivers 4 drinks simultaneously: the Tango® ST Duo is the unique machine of the automatic machines market offering such level of performance with the warranty of an exceptional extraction quality.
- The super automatic coffee machine Tango® ST Duo has two separate 7" screens to control the patented TANGO® double group head with its international recognized reliability.
- With a minimum 60cm width for a 2 groups super automatic coffee machine, the Tango® ST Duo is the ideal unit for businesses aiming to automatically transform coffee and fresh milk into a variety of espresso coffee beverages.
- Delivery Capacity: Espresso 40ml: 440 cups/h Lungo 100ml: 300 cups/h Hot Water: 56 L/h Cappuccino 100ml: 240 cups/h Latte 100ml: 180 cups/h
- Tango Cappuccinatore device with double feature L: for hot milk and C: for foam by air injection.

## Construction

- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.
- LCD Touchscreen.
- LED lights on body.

# TANGO ST DUO 222, Steamair

## Electric

Supply voltage: 208-240 V/1 ph/60 Hz

Electrical power, max: 5.5 kW

Plug type:

## Water:

Cold water temperature  
(min/max): 5 / 60 °C

## Key Information:

External dimensions,  
Height: 32 13/16" (833 mm)

External dimensions,  
Weight: 291 lbs (132 kg)

Net weight: 291 lbs (132 kg)

Shipping width: 43 5/16" (1100 mm)

Shipping depth: 29 1/2" (750 mm)

Shipping height: 33 1/16" (840 mm)

Shipping weight: 328 lbs (149 kg)

Shipping volume: 0.7 m<sup>3</sup>

## Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.05.23

Part of



Electrolux  
Professional  
Group

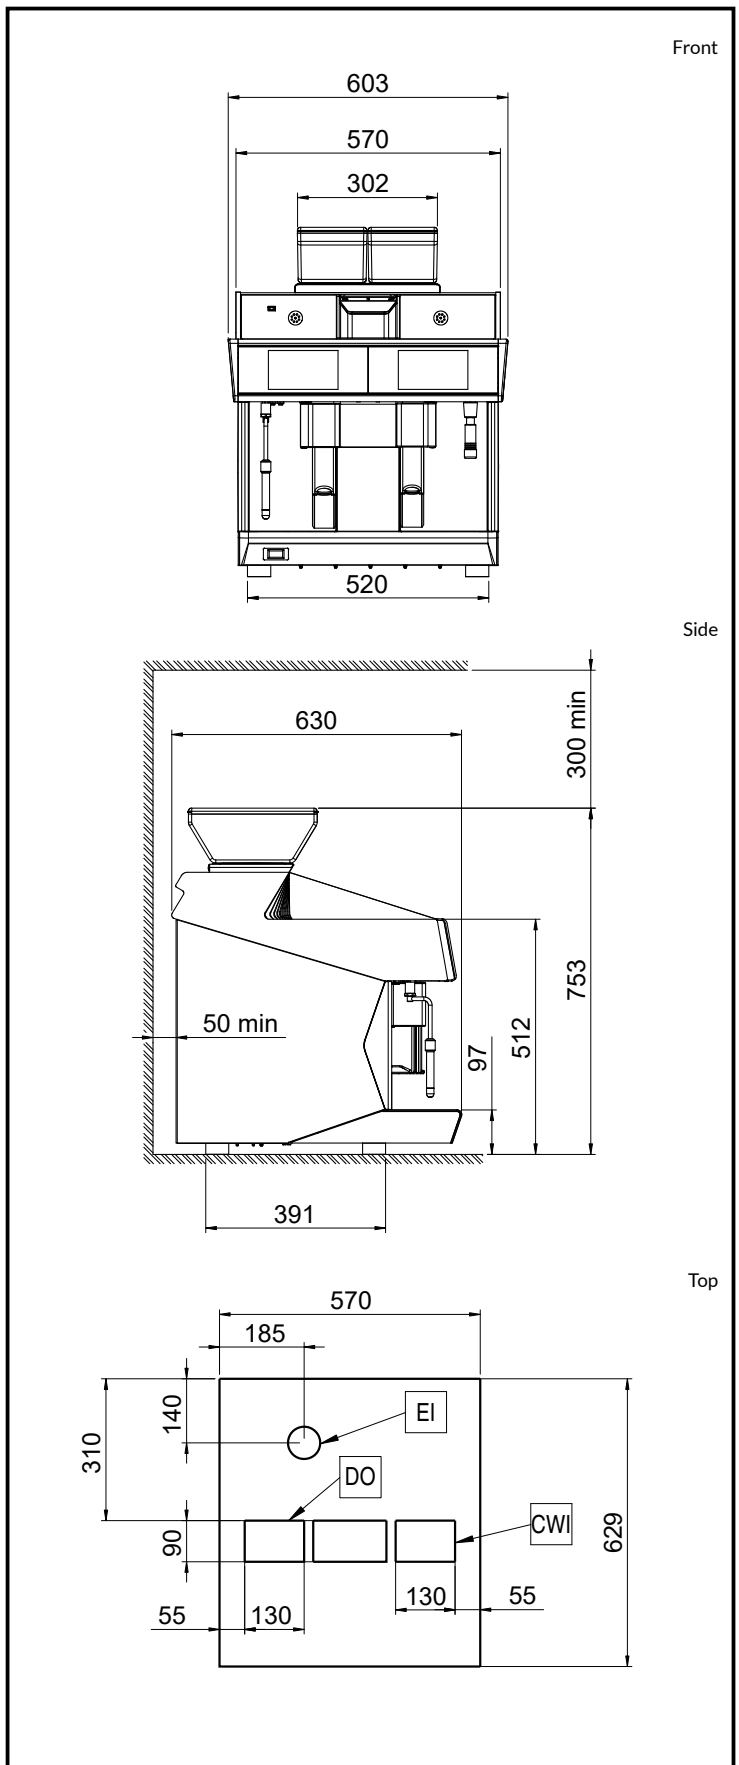

**UNIC**