

## TANGO ST SOLO 120, Steamair



---

### Ref602743 (SOLOST120SAUL)

Super Automatic Espresso Machine

- 1 Group
- 2 Grinders
- No Milk System - Steamair - Mitigated Hot Water
- 208-240V 1N 60~Hz
- UL/NSF Certified
- Inox

#### General Features

The Tango® ST delivers exceptional coffee quality with the patented Tango® Dual Infusion Chamber, engineered for high performance and precision. Ideal for busy environments like cafes, bars, and hospitality venues, this super-automatic machine offer unparalleled reliability and consistency, creating outstanding espresso every time. With intuitive controls and robust features, the Tango® ST makes exceptional coffee accessible for both barista and self-service settings.

# TANGO ST SOLO 120, Steamair

## Main Features

- Auto cleaning program.
- 1 group full-automatic machine.
- 6.5 liter steam/coffee boiler.
- The super automatic coffee machine Tango® ST Solo takes up a 7" color touch screen user interface to control intuitively the TANGO® group head recognized for its exceptional coffee extraction quality. It aims to automatically transform coffee and fresh milk into a variety of espresso beverages.
- Programmable hot water.
- Steamair milk auto-frother programmable outlet.
- The machine is able to create and compose a choice of 48 drinks menu and delivers 2 drinks simultaneously operating water and steam: it impresses its users with an exceptional result in every cup, and the quality of its equipment makes it a highly reliable choice for demanding professional use.
- Delivery Capacity: Espresso 40ml: 270 cups/h Lungo 100ml: 180 cups/h Hot Water: 36 L/h

## Optional Accessories

- KIT OF RAISED 3" FEET

PNC 871041

## Construction

- PID (proportional–integral–derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.
- 2 coffee grinders (1 x 1,7 kg & 1 x 1,2 kg coffee hoppers).
- LCD Touchscreen.
- LED lights on body.

**UNIC**

# TANGO ST SOLO 120, Steamair

## Electric

**Supply voltage:** 208-240 V/1 ph/60 Hz

**Electrical power, max:** 5.5 kW

**Plug type:**

## Water:

**Cold water temperature (min/max):** 5 / 60 °C

## Key Information:

**External dimensions,**

**Height:** 32 13/16" (833 mm)

**External dimensions,**

**Weight:** 220 lbs (100 kg)

**Net weight:** 220 lbs (100 kg)

**Shipping width:** 43 5/16" (1100 mm)

**Shipping depth:** 29 1/2" (750 mm)

**Shipping height:** 33 1/16" (840 mm)

**Shipping weight:** 258 lbs (117 kg)

**Shipping volume:** 0.7 m<sup>3</sup>

## Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.02.11

Part of



Electrolux  
Professional  
Group

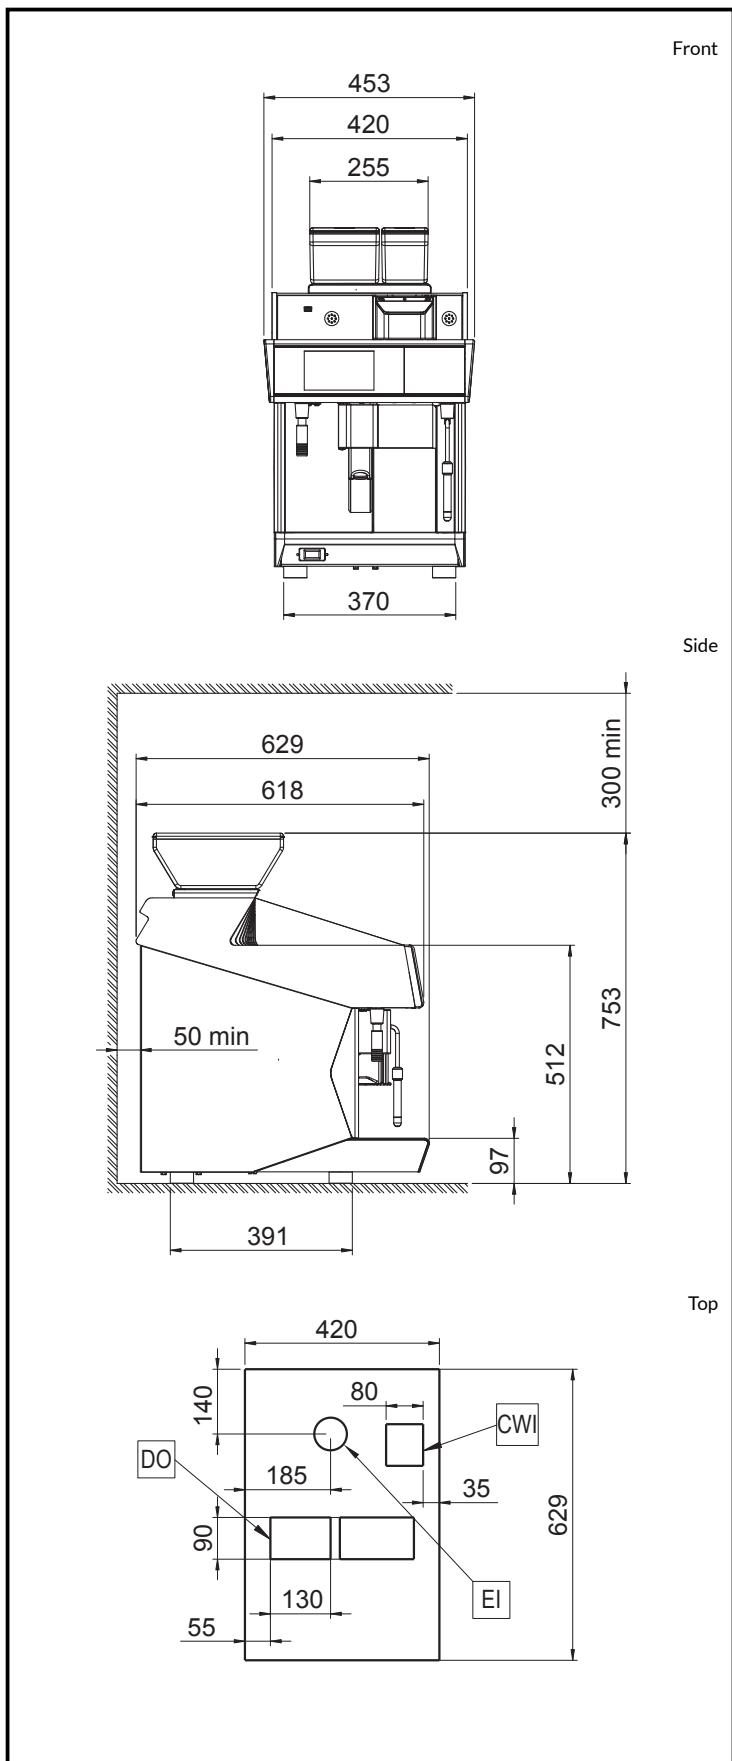

**UNIC**