

# TANGO XP Duo 230, Steamair, mat dark grey color, NSF UL



## General Features

Ref604009  
(UTANGOXP230S8)

UTANGOXP230S8

UNIC

# TANGO XP Duo 230, Steamair, mat dark grey color, NSF UL

The TANGO® XP delivers high-quality coffee with every cup, backed by UNIC's expertise in espresso technology. Designed for busy environments, it ensures consistent taste while offering innovative milk foaming for hot and cold drinks.

With its intuitive 10-inch touchscreen and easy-to-remove components, the TANGO® XP is user-friendly, efficient, and versatile. It's the ultimate solution for professionals who demand precision, performance, and adaptability in every brew.

**UNIC**

# TANGO XP Duo 230, Steamair, mat dark grey color, NSF UL

## Main Features

- 2 groups full-automatic machine.
- Two high precision grinders with 83mm flat burrs
- Two coffee bean hoppers 1kg/2.2lb capacity each
- Third high precision grinder with 83mm flat burrs
- Third bean hopper 0,7kg/1.5lb capacity
- TANGO® patented brewing group with two independent pistons
- Large coffee cups tray
- User friendly 10 inches touch screen user interface
- Intuitive programming of all parameters included grinder calibration, tamping, pre-infusion, coffee weight, volumes
- Auto cleaning program.
- Independent steam and coffee boilers 1.8L capacity
- Height adjustable and dismountable coffee spout, 82 to 200mm/3" to 7.5" cup clearance
- Ergonomic waste coffee drawer, easy to remove and to clean
- Steamair milk auto-frother programmable outlet.
- Programmable water and steam with independent touch command
- Ergonomic drip tray, easy to remove and to clean
- Delivery capacity:

Espresso 40ml: 440 cups/h

Lungo 100ml: 300 cups/h

Hot Water: 30 L/h

## Construction

- Aluminum painted flat side panels (customized color on request)
- Tritan beans hopper
- Full metal brewing unit

## Included Accessories

- 1 of KIT OF RAISED 3" FEET PNC 871041

# TANGO XP Duo 230, Steamair, mat dark grey color, NSF UL

## Electric

Supply voltage:

604009  
(UTANGOXP230S8) 208-240 V/1 ph/60 Hz

Electrical power, max: 5.2 kW

Current consumption 22 Amps

Plug type: NEMA L6-30P

## Water:

Cold water temperature  
(min/max): 5 / 60 °C

## Key Information:

External dimensions,  
Width: 19 3/8" (492 mm)

External dimensions,  
Depth: 25 5/16" (643 mm)

External dimensions,  
Height: 31 7/8" (810 mm)

Net weight: 227 lbs (103 kg)

Shipping width: 43 5/16" (1100 mm)

Shipping depth: 29 1/2" (750 mm)

Shipping height: 33 1/16" (840 mm)

Shipping weight: 265 lbs (120 kg)


## Certifications



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.10.28

Part of  Electrolux  
Professional  
Group

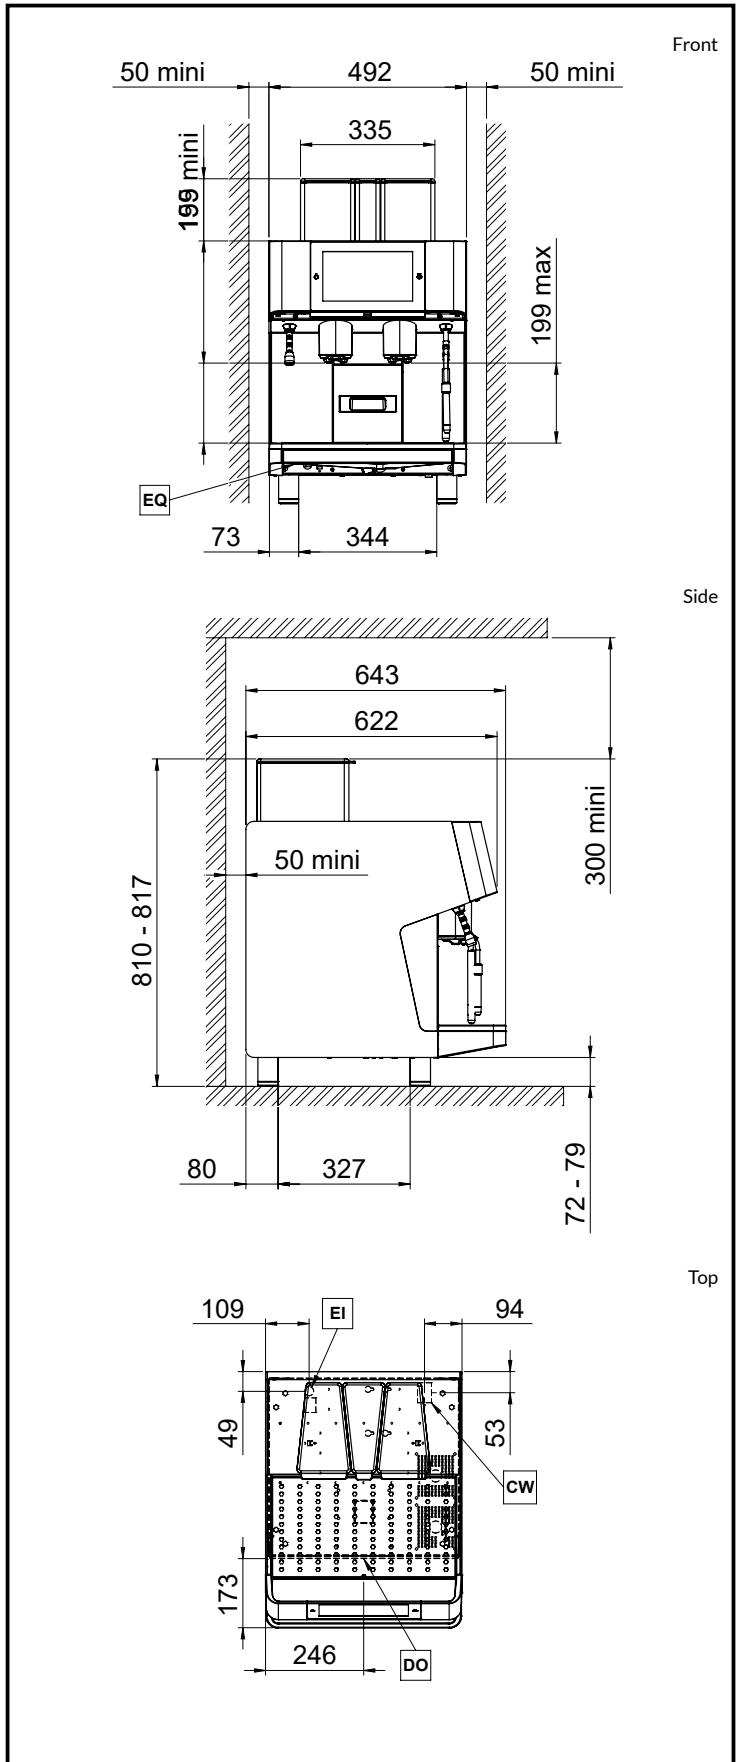

# UNIC