

TANGO XP Solo 12P, Steamair, mat dark grey color, NSF UL



General Features

Ref604012
(UTANGOXP12PS8)

Super Automatic Espresso Machine

UTANGOXP12PS8

UNIC

TANGO XP Solo 12P, Steamair, mat dark grey color, NSF UL

The TANGO® XP delivers high-quality coffee with every cup, backed by UNIC's expertise in espresso technology. Designed for busy environments, it ensures consistent taste while offering innovative milk foaming for hot and cold drinks.

With its intuitive 10-inch touchscreen and easy-to-remove components, the TANGO® XP is user-friendly, efficient, and versatile. It's the ultimate solution for professionals who demand precision, performance, and adaptability in every brew.

UNIC

TANGO XP Solo 12P, Steamair, mat dark grey color, NSF UL

Main Features

- 1 group full-automatic machine.
- Two high precision grinders with 83mm flat burrs
- Two coffee bean hoppers 1kg/2.2lb capacity each
- TANGO exclusive brewing group with a single piston
- Large coffee cups tray
- User friendly 10 inches touch screen user interface
- Intuitive programming of all parameters included grinder calibration, tamping, pre-infusion, coffee weight, volumes
- Auto cleaning program.
- Independent steam and coffee boilers 1.8L capacity
- Height adjustable and dismountable coffee spout, 82 to 200mm/3" to 7.5" cup clearance
- Ergonomic waste coffee drawer, easy to remove and to clean
- Programmable water and steam with independent touch command
- Steamair milk auto-frother programmable outlet.
- Ergonomic drip tray, easy to remove and to clean
- Delivery capacity: Espresso 40ml: 220 cups/h Lungo 100ml: 150 cups/h Hot water: 30 L/h
- Exclusive Pump System for Cold & Hot Milk with foam pump technology.

Construction

- Aluminum painted flat side panels (customized color on request)
- Tritan beans hopper
- Full metal brewing unit

Included Accessories

- 1 of KIT OF RAISED 3" FEET PNC 871041
- 1 of Side milk refrigerator with exclusive pump system, with 9L capacity container for TANGO XP PNC 871093

TANGO XP Solo 12P, Steamair, mat dark grey color, NSF UL

Electric

Supply voltage:

604012
(UTANGOXP12PS8) 208-240 V/1 ph/60 Hz

Electrical power, max: 5.2 kW

Current consumption 22 Amps

Plug type: NEMA L6-30P

Water:

Cold water temperature
(min/max): 5 / 60 °C

Key Information:

External dimensions,
Width: 15 11/16" (398 mm)

External dimensions,
Depth: 25 5/16" (643 mm)

External dimensions,
Height: 31 7/8" (810 mm)

Net weight: 187 lbs (85 kg)

Shipping width: 43 5/16" (1100 mm)

Shipping depth: 29 1/2" (750 mm)

Shipping height: 33 1/16" (840 mm)

Shipping weight: 225 lbs (102 kg)

Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.10.30

Part of



Electrolux
Professional
Group

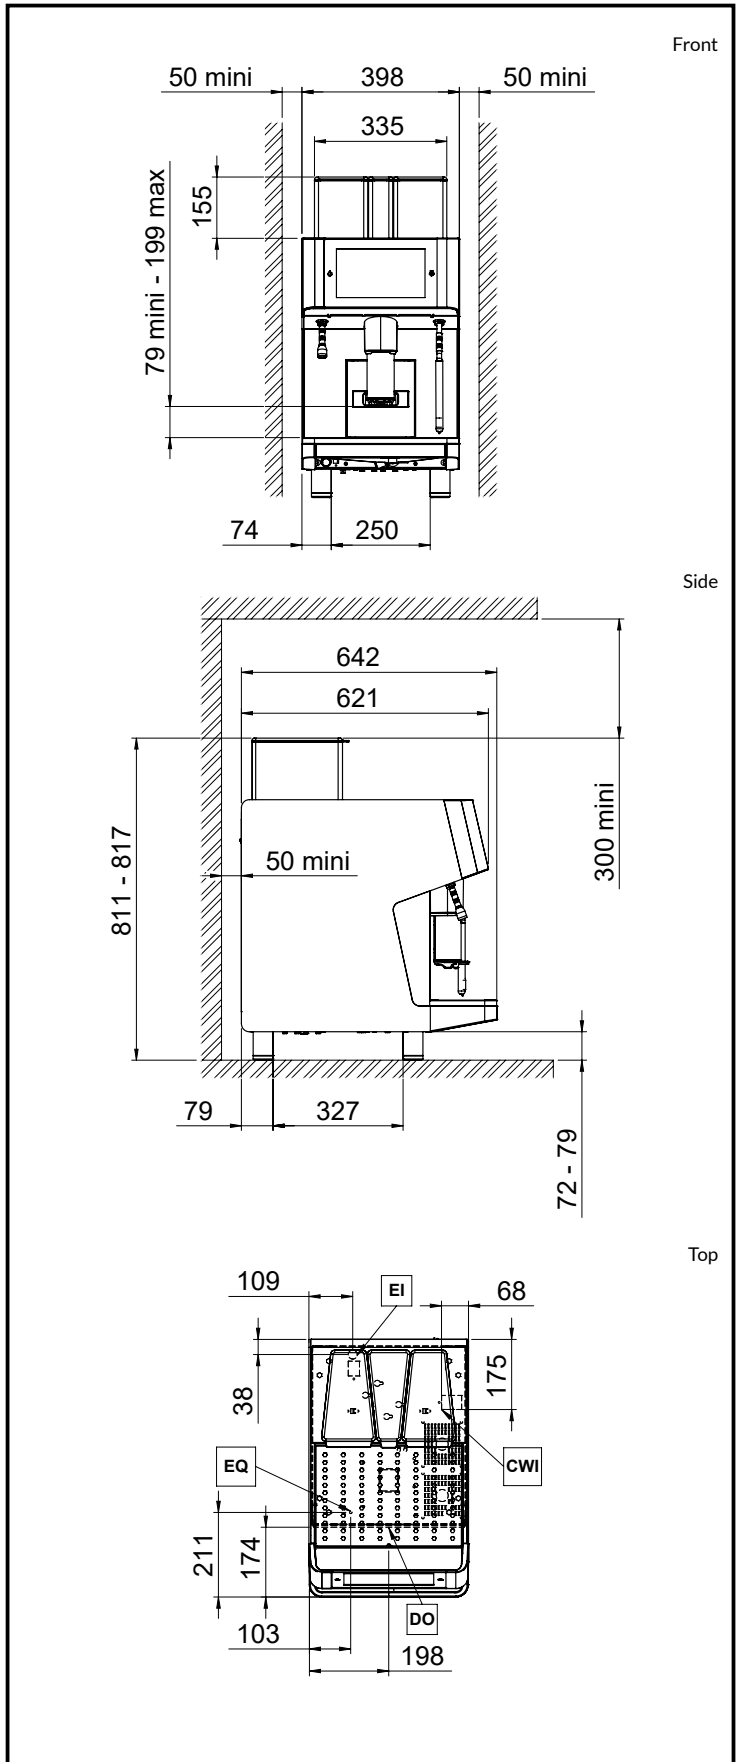

UNIC