

# TANGO XP Solo 130, Steamair, mat dark grey color, NSF UL



---

## Ref604013 (UTANGOXP130S8)

Super Automatic Espresso Machine

- 1 Group
- 3 Grinders
- No Milk System - Steamair - Std Hot Water
- 208-240V 1N 60~Hz
- UL/NSF Certified
- Frost Grey

### General Features

The Tango® XP delivers high-quality coffee in every cup, thanks to UNIC's expertise in espresso technology. Designed for busy environments, it ensures consistent taste while offering innovative milk foaming for hot and cold beverages.

With its intuitive 10 inches touch screen and easy-to-remove components, the Tango® XP is user-friendly, efficient and versatile. It's the ultimate solution for professionals who demand precision, performance and adaptability in every drinks recipes.

# TANGO XP Solo 130, Steamair, mat dark grey color, NSF UL

## Main Features

- 1 group full-automatic machine.
- Two high precision grinders with 83mm flat burrs
- Two coffee bean hoppers 1kg/2.2lb capacity each
- Third high precision grinder with 83mm flat burrs
- Third bean hopper 0,7kg/1.5lb capacity
- TANGO exclusive brewing group with a single piston
- Large coffee cups tray
- User friendly 10 inches touch screen user interface
- Intuitive programming of all parameters included grinder calibration, tamping, pre-infusion, coffee weight, volumes
- Auto cleaning program.
- Independent steam and coffee boilers 1.8L capacity
- Height adjustable and dismountable coffee spout, 82 to 200mm/3" to 7.5" cup clearance
- Ergonomic waste coffee drawer, easy to remove and to clean
- Programmable water and steam with independent touch command
- Steamair milk auto-frother programmable outlet.
- Ergonomic drip tray, easy to remove and to clean
- Delivery capacity: Espresso 40ml: 220 cups/h Lungo 100ml: 150 cups/h Hot water: 30 L/h

## Construction

- Aluminum painted flat side panels (customized color on request)
- Tritan beans hopper
- Full metal brewing unit

## Included Accessories

- 1 of KIT OF RAISED 3" FEET PNC 871041

# TANGO XP Solo 130, Steamair, mat dark grey color, NSF UL

## Electric

Supply voltage:

604013  
(UTANGOXP130S8) 208-240 V/1 ph/60 Hz

Electrical power, max: 5.2 kW

Current consumption 22 Amps

Plug type: NEMA L6-30P

## Water:

Cold water temperature  
(min/max): 5 / 60 °C

## Key Information:

External dimensions,  
Width: 15 11/16" (398 mm)

External dimensions,  
Depth: 25 5/16" (643 mm)

External dimensions,  
Height: 31 7/8" (810 mm)

Net weight: 196 lbs (89 kg)

Shipping width: 43 5/16" (1100 mm)

Shipping depth: 29 1/2" (750 mm)

Shipping height: 33 1/16" (840 mm)

Shipping weight: 234 lbs (106 kg)

## Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.11.30

Part of



Electrolux  
Professional  
Group

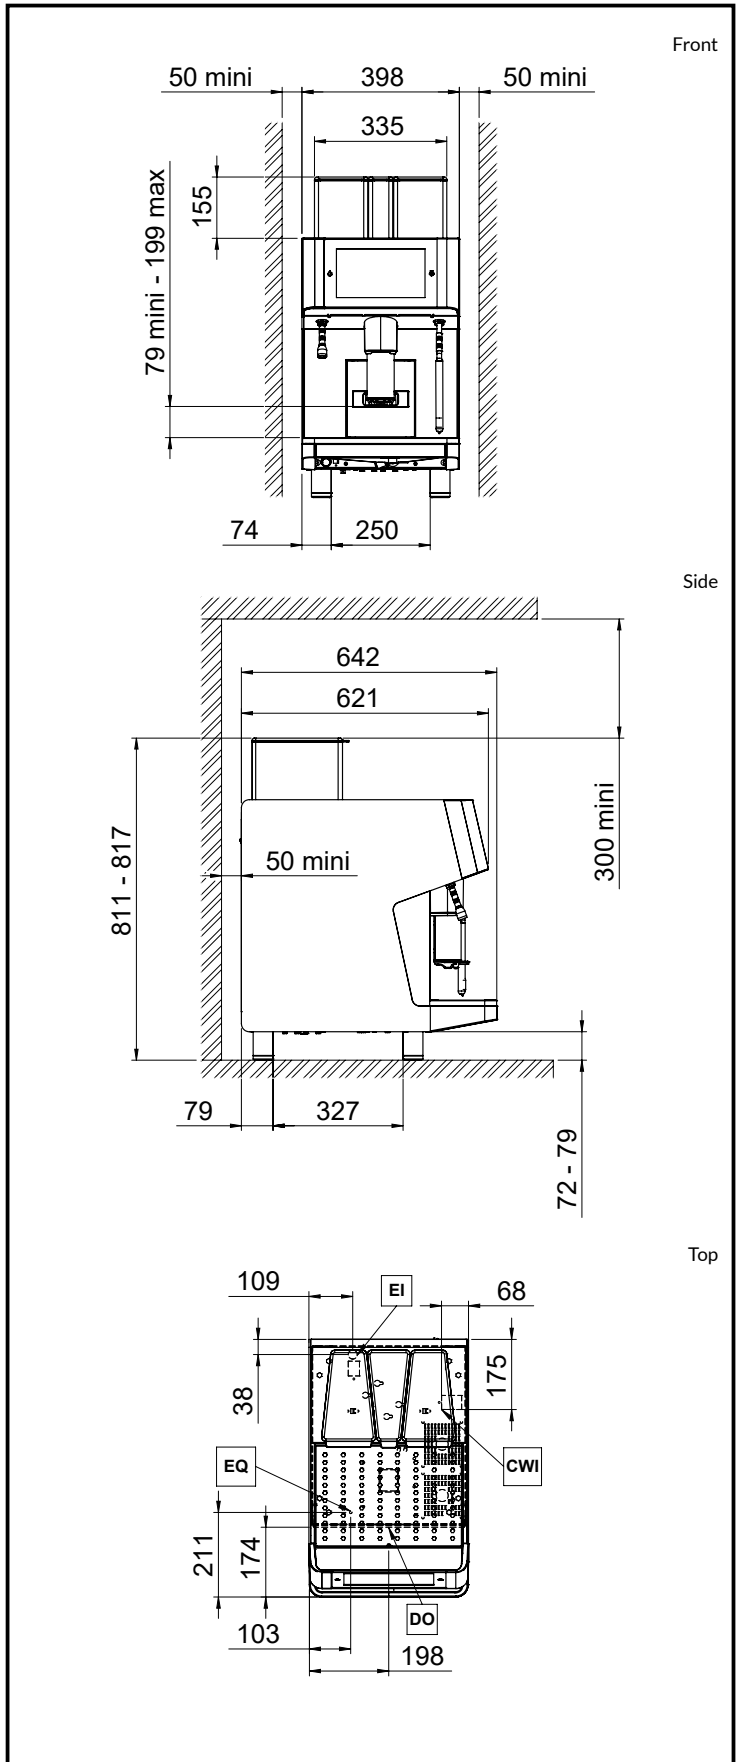

# UNIC