

## Classic 2 groups, RL technology, 230V 50Hz Mono



---

### Ref: 602637 (CLASSIC2RL)

Traditional Espresso Machine

- 2 Groups
- Inox Steam - Hot Water - Inox Steam
- Inox
- 230 V 1N 50-Hz 3kW
- CE/CB Certified

### General Features

Traditional 2 groups espresso machine with large steam boiler and heat exchanger featuring specific RL technology for high brewing temperature-sensitive coffees or blends. Elegant lines and reliable technologies appreciated by coffee professionals, the CLASSIC model is made more attractive by its quality/ price ratio. Designed for rugged commercial application, the CLASSIC is the perfect traditional espresso machine to ensure an excellent quality espresso result, consistency and high performance during rush period.

# Classic 2 groups, RL technology, 230V 50Hz Mono

## Main Features

- Heavy duty components and welded construction, a direct mounted boiler group head for thermal stability and reliable extraction, easy access to components for uncomplicated servicing, and unlimited steam.
- 2 stainless steel Steam arms / 2 Steam switches on, off and pulse positions.
- Maestro brew group: directly to boiler group heads are mounted for shot temperature stability.
- Large cup warming capacity: integrated cup warmer on the top of the machines.
- 4 programmable volume keys per group + Semi-automatic key for each group for manual control.
- Automatic cleaning program.

## Construction

- Built-in cup warmer.

## Included Accessories

- 1 of Filter holder for one cup PNC 871002
- 2 of Filter holder for two cups PNC 871003

## Optional Accessories

- Filter holder for one cup PNC 871002
- Filter holder for two cups PNC 871003
- Filter holder for three cups PNC 871004
- Knock box drawer for 2-group machines PNC 871006
- Knock box drawer for 3-group machines PNC 871007
- Filter for one cup, 12 gr PNC 871017
- Filter for two cups, 18 gr PNC 871018
- Stainless steel knock box drawer PNC 871019

# Classic 2 groups, RL technology, 230V 50Hz Mono

## Electric

Supply voltage:

602637 (CLASSIC2RL) 230 V/1N ph/50 Hz

Electrical power max.: 3 kW

Plug type: Cable without plug

## Water:

Cold water temperature

(min/max): 5 / 60 °C

## Key Information:

External dimensions,

Width: 642 mm

External dimensions,

Depth: 568 mm

External dimensions,


Height: 580 mm

Net weight: 55 kg

Shipping volume: 0.69 m<sup>3</sup>

Sustainability

Current consumption: 13 Amps

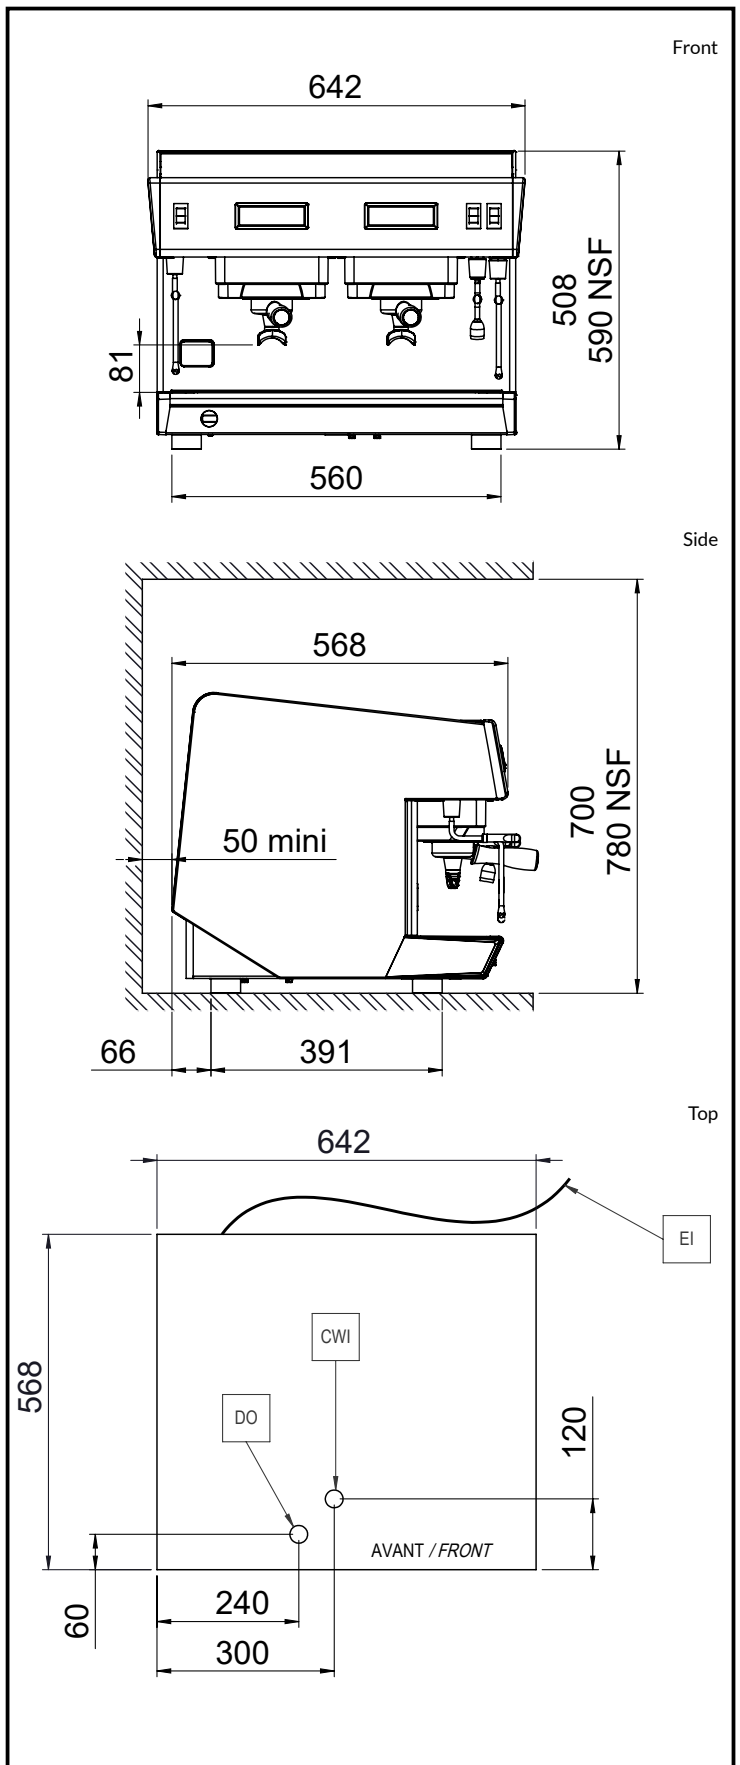

## Certifications



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.11.08

Part of  Electrolux Professional Group

**UNIC**