Classic 2 groups, RL technology, 230V 50Hz Mono



Ref: 602637 (CLASSIC2RL)

Traditional Espresso Machine

- $\cdot 2 \, \text{Groups}$
- \cdot Inox Steam Hot Water Inox Steam
- $\cdot \log$
- · 230 V 1N 50~Hz 3kW
- \cdot CE/CB Certified

General Features

The Classic is the perfect traditional espresso machine to guarantee topquality espresso and consistency even in busy periods.

With elegant lines and reliable technologies appreciated by coffee professionals, the Classic is made even more attractive by its quality/price ratio. The Classic is available in 1, 2 or 3 group configurations.

Classic 2 groups, RL technology, 230V 50Hz Mono

Main Features

- Heavy duty components and welded construction, a direct mounted boiler group head for thermal stability and reliable extraction, easy access to components for uncomplicated servicability, and unlimited steam.
- 2 stainless steel Steam arms / 2 Steam switches on, off and pulse positions.
- Maestro brew group: directly to boiler group heads are mounted for shot temperature stability.
- Large cup warming capacity: integrated cup warmer on the top of the machines.
- 4 programmable volume keys per group + Semi-automatic key for each group for manual control.
- Automatic cleaning program.

Construction

• Built-in cup warmer.

Included Accessories

 1 of Filter holder for one cup 	PNC 871002	
• 2 of Filter holder for two cups	PNC 871003	
Optional Accessories		
 Filter holder for one cup 	PNC 871002	
 Filter holder for two cups 	PNC 871003	
 Filter holder for three cups 	PNC 871004	
 Knock box drawer for 2-group machines 	PNC 871006	
 Knock box drawer for 3-group machines 	PNC 871007	
 Filter for one cup, 12 gr 	PNC 871017	
 Filter for two cups, 18 gr 	PNC 871018	
 Stainless steel knock box drawer 	PNC 871019	

UNIC


Classic 2 groups, RL technology, 230V 50Hz Mono

		_
Electric		
Supply voltage:	230 V/1N ph/50 Hz	
Electrical power, max:	3 kW	
Plug type:	Cable without plug	
Water:		
Cold water temperature	e	
(min/max):	5/60°C	
Key Information:		
Net weight:	55 kg	
Shipping volume:	0.69 m ³	
Sustainability		
Current consumption:	13 Amps	
Certifications		
Certifications		568
	IEURE FRANCE	
CHEAR 1907	мт	

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.06.28

Part of Part of Group

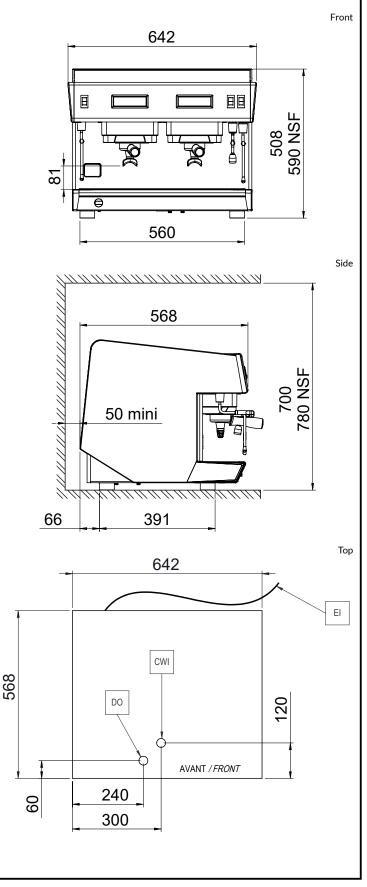

UNIC