

Classic 3 groups



Ref: 602632 (CLASSIC3)

Traditional espresso machine, 3 groups, 15,6 liter boiler, 3 independent control boxes with 4 programmable dosing program, manual water & steam, automatic cleaning cycle, stainless steel body

General Features

Traditional 3 groups espresso machine with large steam boiler. Elegant lines and reliable technologies appreciated by coffee professionals, the CLASSIC model is made more attractive by its quality/ price ratio. Designed for rugged commercial application, the CLASSIC is the perfect traditional espresso machine to ensure an excellent quality espresso result, consistency and high performance during rush period.

Classic 3 groups

Main Features

- Heavy duty components and welded construction, a direct mounted boiler group head for thermal stability and reliable extraction, easy access to components for uncomplicated servcability, and unlimited steam.
- Maestro brew group: directly to boiler group heads are mounted for shot temperature stability.
- Large cup warming capacity: integrated cup warmer on the top of the machines.
- 4 programmable volume keys per group + Semi-automatic key for each group for manual control.
- Automatic cleaning program.
- 2 stainless steel Steam arms / 2 Steam switches on, off and pulse positions.

Construction

- Built-in cup warmer.

Optional Accessories

- | | | |
|---|------------|--------------------------|
| • Filter holder for one cup | PNC 871002 | <input type="checkbox"/> |
| • Filter holder for two cups | PNC 871003 | <input type="checkbox"/> |
| • Filter holder for three cups | PNC 871004 | <input type="checkbox"/> |
| • Knock box drawer for 2-group machines | PNC 871006 | <input type="checkbox"/> |
| • Knock box drawer for 3-group machines | PNC 871007 | <input type="checkbox"/> |
| • Filter for one cup, 12 gr | PNC 871017 | <input type="checkbox"/> |
| • Filter for two cups, 18 gr | PNC 871018 | <input type="checkbox"/> |
| • Stainless steel knock box drawer | PNC 871019 | <input type="checkbox"/> |

Classic 3 groups

Electric

Supply voltage:

602632 (CLASSIC3) 400 V/3N ph/50 Hz

Electrical power max.: 4.6 kW

Plug type:

Water:

Cold water temperature

(min/max): 5 / 60 °C

Key Information:

External dimensions,

Width: 862 mm

External dimensions,

Depth: 568 mm

External dimensions,


Height: 508 mm

Net weight: 75 kg

Shipping volume: 0.83 m³

Sustainability

Current consumption:

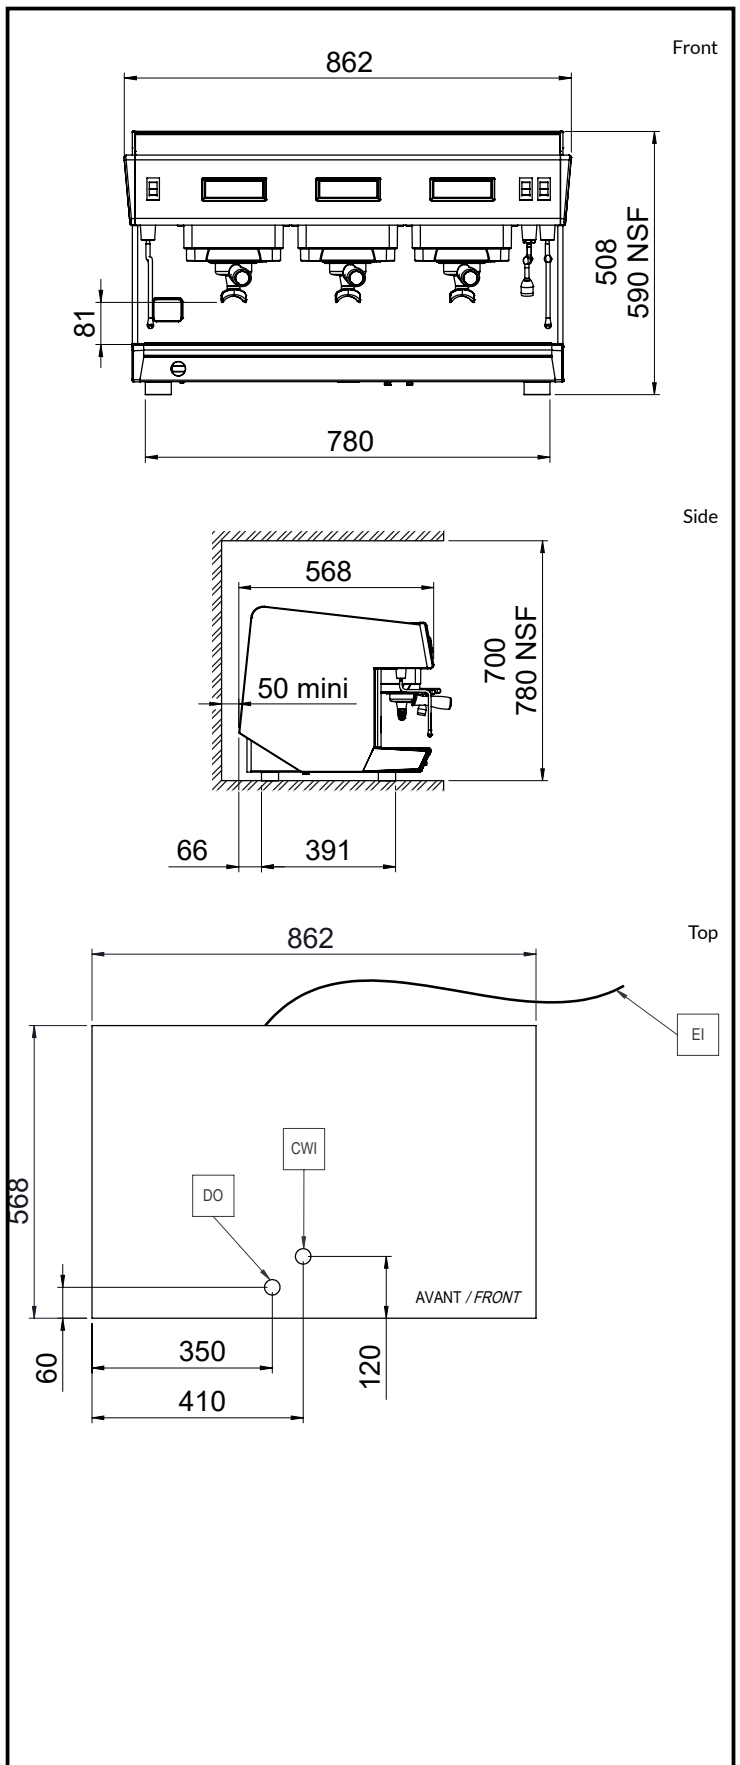

Certifications



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.04.09

Part of  Electrolux Professional Group

UNIC