

Classic e 3 groups



Ref: 604065
(CH3.CE.400.4.7K)

Traditional Espresso Machine

- 3 Groups
- Cool Touch Steam - Hot Water - Cool Touch Steam
- Inox
- 400 V 3N 50~Hz 4,7kW
- CE/CB Certified

General Features

The Classic e's elegant lines are underlined by a control board featuring new control buttons. User-friendly and low-maintenance, it delivers features that ensure perfect coffee extraction of consistent quality, and high performance during periods of intensive use.

CH3.CE.400.4.7K

UNIC

Classic e 3 groups

Main Features

- Heavy duty components and welded construction, a direct mounted boiler group head for thermal stability and reliable extraction, easy access to components for uncomplicated servicing, and unlimited steam.
- Maestro brew group: directly to boiler group heads are mounted for shot temperature stability.
- 4 programmable volume keys per group + Semi-automatic key for each group for manual control.
- Programmable water and steam.
- Automatic cleaning cycle.
- Manual Steamglide lever.
- Cool touch steam outlets to control steam without the risk of burns, easier to clean after each use

Construction

- Built-in cup warmer.
- Stainless steel body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.

Sustainability

- Standby mode for controlled management of energy consumption

Included Accessories

- | | |
|-----------------------------------|------------|
| • 1 of Filter holder for one cup | PNC 871002 |
| • 3 of Filter holder for two cups | PNC 871003 |

Optional Accessories

- | | | |
|---|------------|--------------------------|
| • Filter holder for one cup | PNC 871002 | ☐ |
| • Filter holder for two cups | PNC 871003 | ☐ |
| • Filter holder for three cups | PNC 871004 | ☐ |
| • Knock box drawer for 3-group machines | PNC 871007 | ☐ |
| • Filter for one cup, 12 gr | PNC 871017 | ☐ |
| • Filter for two cups, 18 gr | PNC 871018 | ☐ |
| • Stainless steel knock box drawer | PNC 871019 | ☐ |

Classic e 3 groups

Electric

Supply voltage: 400 V/3N ph/50/60 Hz

Electrical power, max: 4.7 kW

Current consumption: 7.2 Amps

Plug type: Cable without plug

Water:

Cold water temperature
(min/max): 5 / 60 °C

Key Information:

Net weight: 76 kg

Shipping weight: 97 kg

Shipping height: 840 mm

Shipping width: 1320 mm

Shipping depth: 750 mm

Shipping volume: 0.83 m³

Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.11.26

Part of



Electrolux
Professional
Group

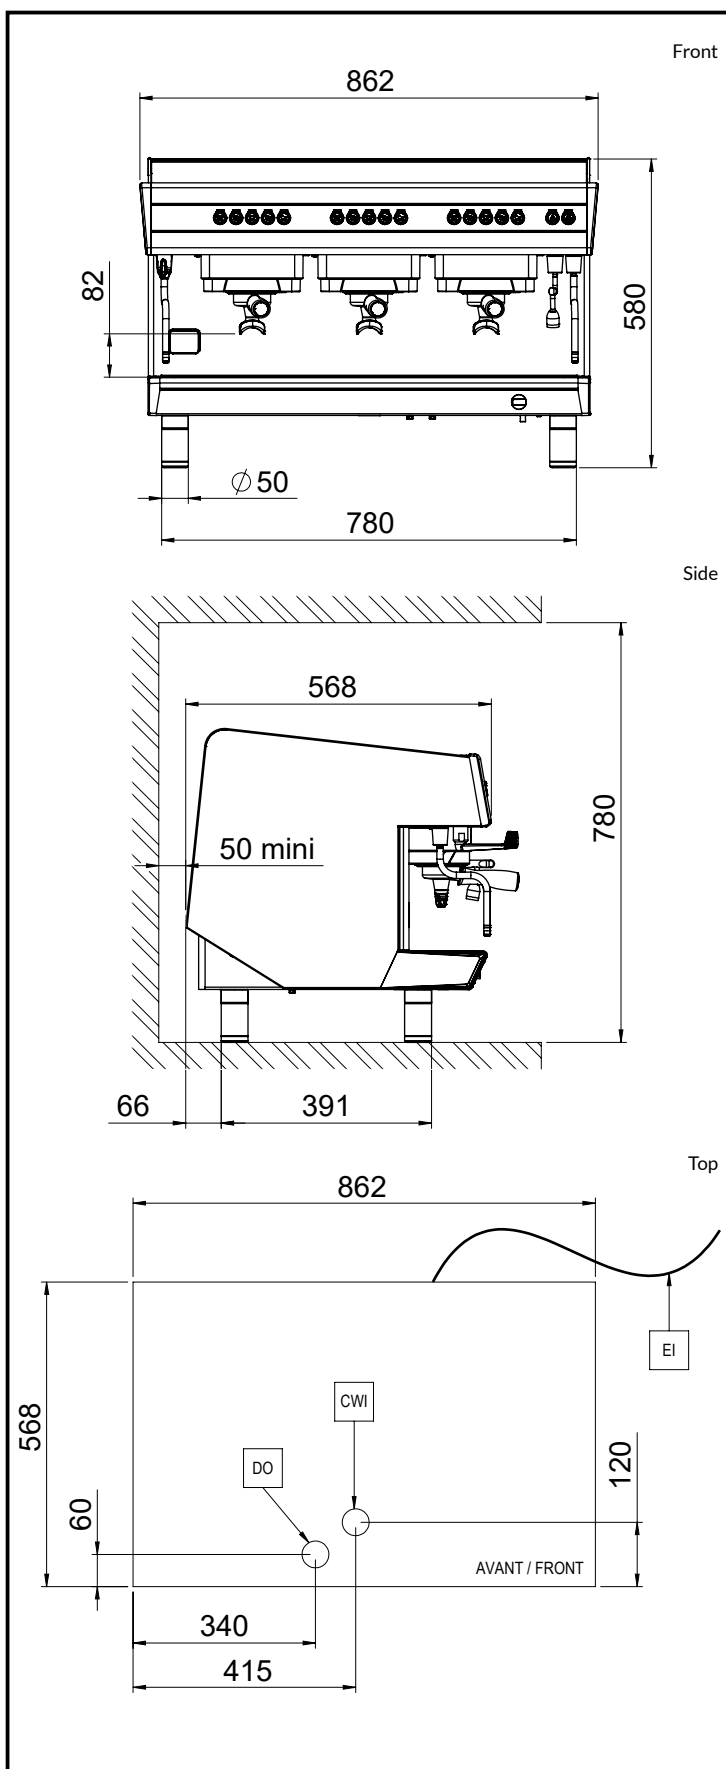

UNIC