

Classic 1 group



**Ref: 602626
(CLASSIC1)**

Traditional Espresso Machine

- 1 Group
- No Steam - Hot Water - Inox Steam
- Inox
- 230 V 1N 50~Hz 3kW
- CE/CB Certified

General Features

The Classic is the perfect traditional espresso machine to guarantee top-quality espresso and consistency even in busy periods.

With elegant lines and reliable technologies appreciated by coffee professionals, the Classic is made even more attractive by its quality/price ratio. The Classic is available in 1, 2 or 3 group configurations.

Classic 1 group

Specifications

- The CLASSIC Elegant lines and reliable technologies appreciated by coffee professionals, the CLASSIC model is made more attractive by its quality/ price ratio. The CLASSIC is the perfect traditional espresso machine to ensure an excellent quality espresso result, and consistency even during the busiest periods of the day.
- Heavy duty components and welded construction, a direct mounted boiler group head for thermal stability and reliable extraction, easy access to components for uncomplicated serviability, and unlimited steam.
- Maestro brew group: directly to boiler group heads are mounted for shot temperature stability.
- Large cup warming capacity: integrated cup warmer on the top of the machines.
- 4 programmable volume keys per group + Semi-automatic key for each group for manual control.
- Automatic cleaning program.

Construction

- Built-in cup warmer.

Included Accessories

- | | |
|-----------------------------------|------------|
| • 1 of Filter holder for one cup | PNC 871002 |
| • 1 of Filter holder for two cups | PNC 871003 |

Optional Accessories

- | | | |
|------------------------------------|------------|--------------------------|
| • Filter holder for one cup | PNC 871002 | ☐ |
| • Filter holder for two cups | PNC 871003 | ☐ |
| • Filter holder for three cups | PNC 871004 | ☐ |
| • Filter for one cup, 12 gr | PNC 871017 | ☐ |
| • Filter for two cups, 18 gr | PNC 871018 | ☐ |
| • Stainless steel knock box drawer | PNC 871019 | ☐ |

Classic 1 group

Electric

Supply voltage: 230 V/1N ph/50 Hz

Electrical power, max: 3 kW

Plug type: Cable without plug

Water:

Cold water temperature (min/max): 5 / 60 °C

Key Information:

Net weight: 41 kg

Shipping volume: 0.32 m³

Sustainability

Current consumption: 13 Amps

Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.08.06

Part of



Electrolux
Professional
Group

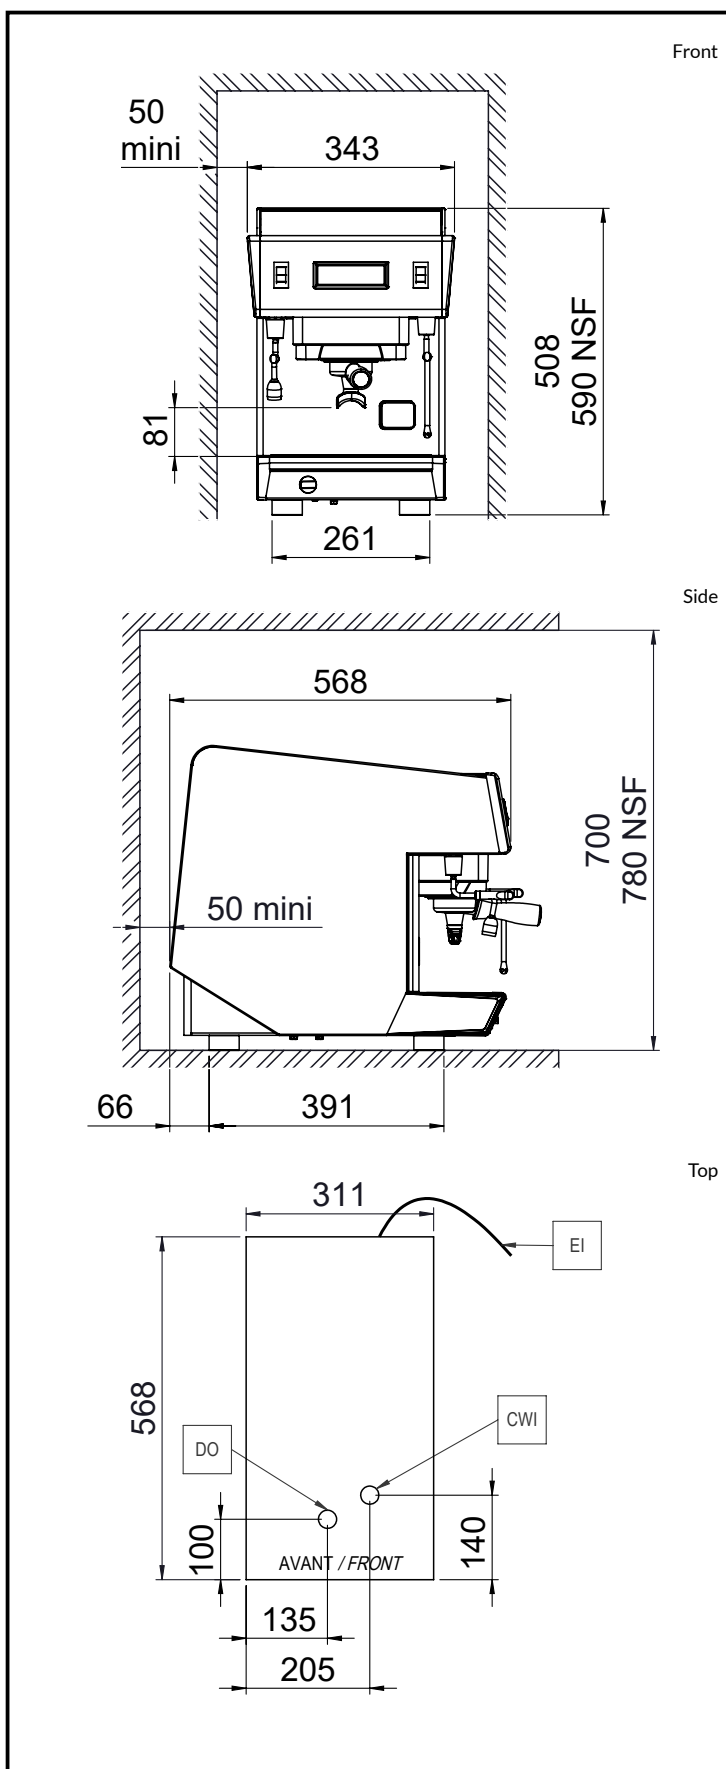

UNIC