

## TANGO ST SOLO 121, Cappuccinatore device



**Ref: 602611**  
**(UTANGOST1LC)**

Super Automatic Espresso Machine

- 1 Group
- 2 Grinders
- Cappuccinator - Teflon Steam - Mitigated Hot Water
- 380-415V 3N 50/60~Hz
- CE/CB Certified
- Inox

### General Features

The Tango® ST delivers exceptional coffee quality with the patented Tango® Dual Infusion Chamber, engineered for high performance and precision. Ideal for busy environments like cafes, bars, and hospitality venues, this super-automatic machine offer unparalleled reliability and consistency, creating outstanding espresso every time. With intuitive controls and robust features, the Tango® ST makes exceptional coffee accessible for both barista and self-service settings.

# TANGO ST SOLO 121, Cappuccinatore device

## Main Features

- The super automatic coffee machine Tango® ST Solo takes up a 7" color touch screen user interface to control intuitively the TANGO® group head recognized for its exceptional coffee extraction quality. It aims to automatically transform coffee and fresh milk into a variety of espresso beverages.
- 1 group full-automatic machine.
- 1 x Tango Cappuccinatore device with double feature L: for hot milk and C: for foam by air injection.
- 6.5 liter steam/coffee boiler.
- Auto cleaning program.
- Programmable water and steam.
- The machine is able to create and compose a choice of 48 drinks menu and delivers 2 drinks simultaneously operating water and steam: it impresses its users with an exceptional result in every cup, and the quality of its equipment makes it a highly reliable choice for demanding professional use.
- Delivery Capacity:  
Espresso 40ml: 270 cups/h  
Lungo 100ml: 180 cups/h  
Hot Water: 36 L/h  
Cappuccino 100ml: 240 cups/h  
Latte 100ml: 180 cups/h
- To obtain milk based beverages, the side milk refrigerator is needed.

## Construction

- 2 coffee grinders (1 x 1,7 kg & 1 x 1,2 kg coffee hoppers).
- LCD Touchscreen.
- LED lights on body.
- PID (proportional-integral-derivative) Temperature control: a precise controller algorithm system that gives consistency and accuracy to brewing temperature management system.

## Optional Accessories

- |  |            |                          |
|--|------------|--------------------------|
| • Mixed hot water outlet for TANGO ST1 and STP | PNC 871020 | <input type="checkbox"/> |
| • TANGO hotel/breakfast service kit            | PNC 871022 | <input type="checkbox"/> |
| • Coffee ground direct discharge chute         | PNC 871023 | <input type="checkbox"/> |

# TANGO ST SOLO 121, Cappuccinatore device

## Electric

Supply voltage: 400 V/3N ph/50 Hz

Electrical power, max: 5.2 kW

Plug type: Cable without plug

## Water:

Cold water temperature (min/max): 5 / 60 °C

## Key Information:

Net weight: 102 kg

Shipping volume: 0.69 m<sup>3</sup>

Sustainability

Current consumption: 7.5 Amps

## Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.12.19

Part of



Electrolux  
Professional  
Group

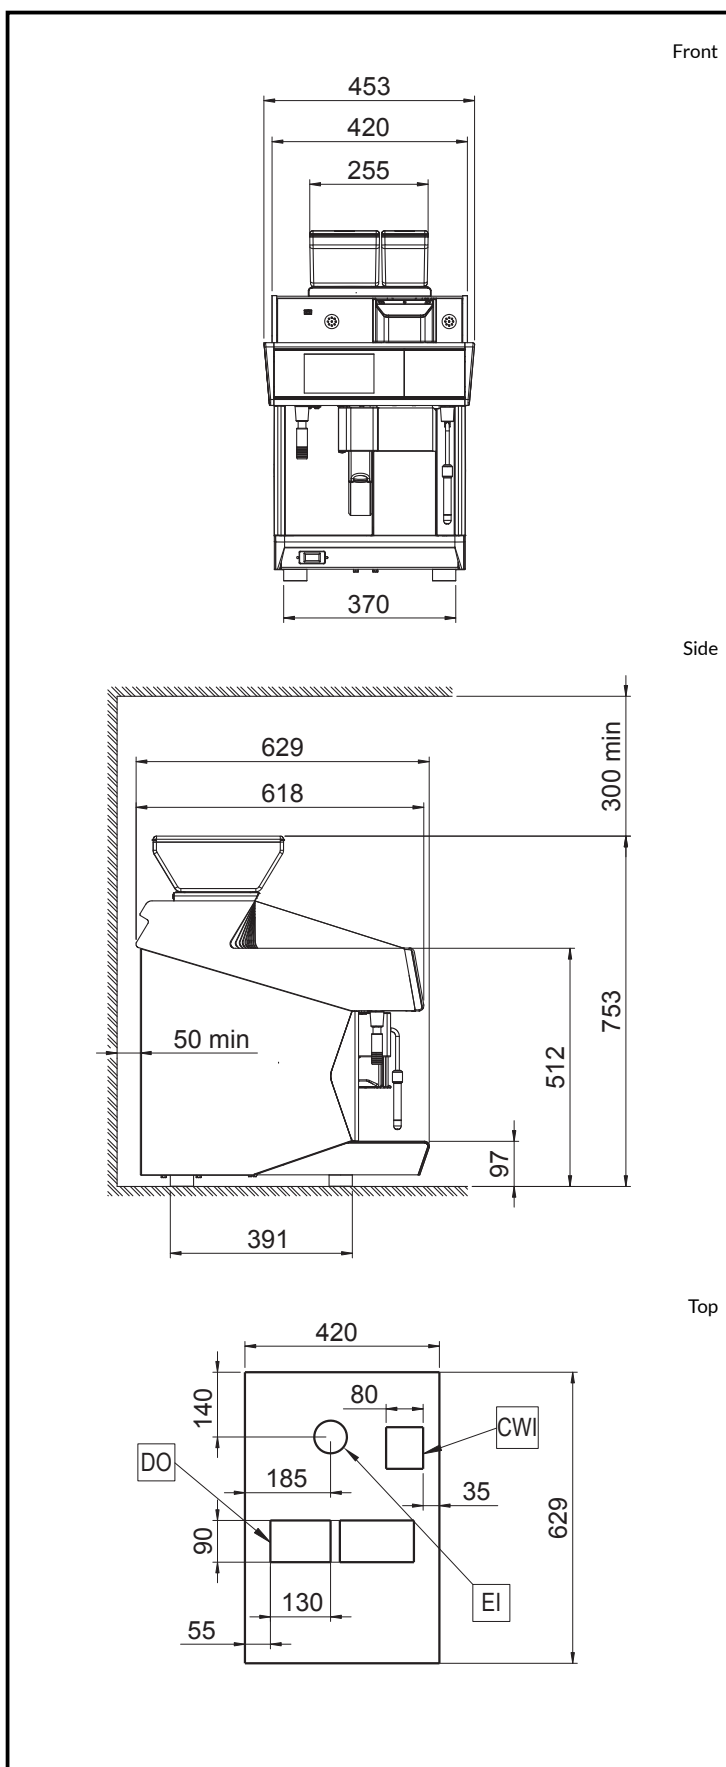

UNIC