

TANGO XP Duo 220, Steamair, mat dark grey color



**Ref: 602605
(UTANGOXP220S)**

Super Automatic Espresso Machine

- 2 Groups
- 2 Grinders
- No Milk System - Steamair - Std Hot Water
- 380-415V 3N 50/60~Hz
- CE/CB Certified
- Frost Grey

General Features

The Tango® XP delivers high-quality coffee in every cup, thanks to UNIC's expertise in espresso technology. Designed for busy environments, it ensures consistent taste while offering innovative milk foaming for hot and cold beverages.

With its intuitive 10 inches touch screen and easy-to-remove components, the Tango® XP is user-friendly, efficient and versatile. It's the ultimate solution for professionals who demand precision, performance and adaptability in every drinks recipes.

TANGO XP Duo 220, Steamair, mat dark grey color

Main Features

- 2 groups full-automatic machine
- Two high precision grinders with 83mm flat burrs
- Two coffee beans hoppers 1kg capacity
- TANGO® patented brewing group with two independent pistons
- Large coffee cups tray
- User friendly 10 inches touch screen user interface
- Intuitive programming of all parameters included grinder calibration, tamping, pre-infusion, coffee weight, volumes
- Auto cleaning program.
- Independent steam and coffee boilers 1.8L capacity
- Height adjustable and dismountable coffee spout, 82 to 200mm cup clearance
- Ergonomic waste coffee drawer, easy to remove and to clean
- Steamair milk auto-frother programmable outlet.
- Programmable water and steam with independent touch command
- Ergonomic drip tray, easy to remove and to clean
- Delivery capacity:

Espresso 40ml: 440 cups/h

Lungo 100ml: 300 cups/h

Hot Water: 30 L/h

Construction

- Aluminum painted flat side panels (customized color on request)
- Tritan beans hopper
- Full metal brewing unit

Included Accessories

- 1 of Raised feet kit PNC 871041

Optional Accessories

- Raised feet kit PNC 871041
- DISHWASHER MOD A10J JOLLY PR PNC 871047
- DISHWASHER MOD A11J JOLLY PC PNC 871048

TANGO XP Duo 220, Steamair, mat dark grey color

Electric

Supply voltage:

602605 380-415 V/3N
(UTANGOXP220S) ph/50/60 Hz

Electrical power max.: 9.6 kW

Current consumption: 13.3 Amps

Plug type: Cable without plug

Water:

Cold water temperature
(min/max): 5 / 60 °C

Key Information:

External dimensions,

Width: 492 mm

External dimensions,
Depth: 643 mm

External dimensions,
Height: 810 mm

Net weight: 97 kg

Shipping weight: 114 kg

Shipping height: 840 mm

Shipping width: 1100 mm

Shipping depth: 750 mm

Shipping volume: 0.69 m³


Certifications



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.12.07

Part of  Electrolux
Professional
Group

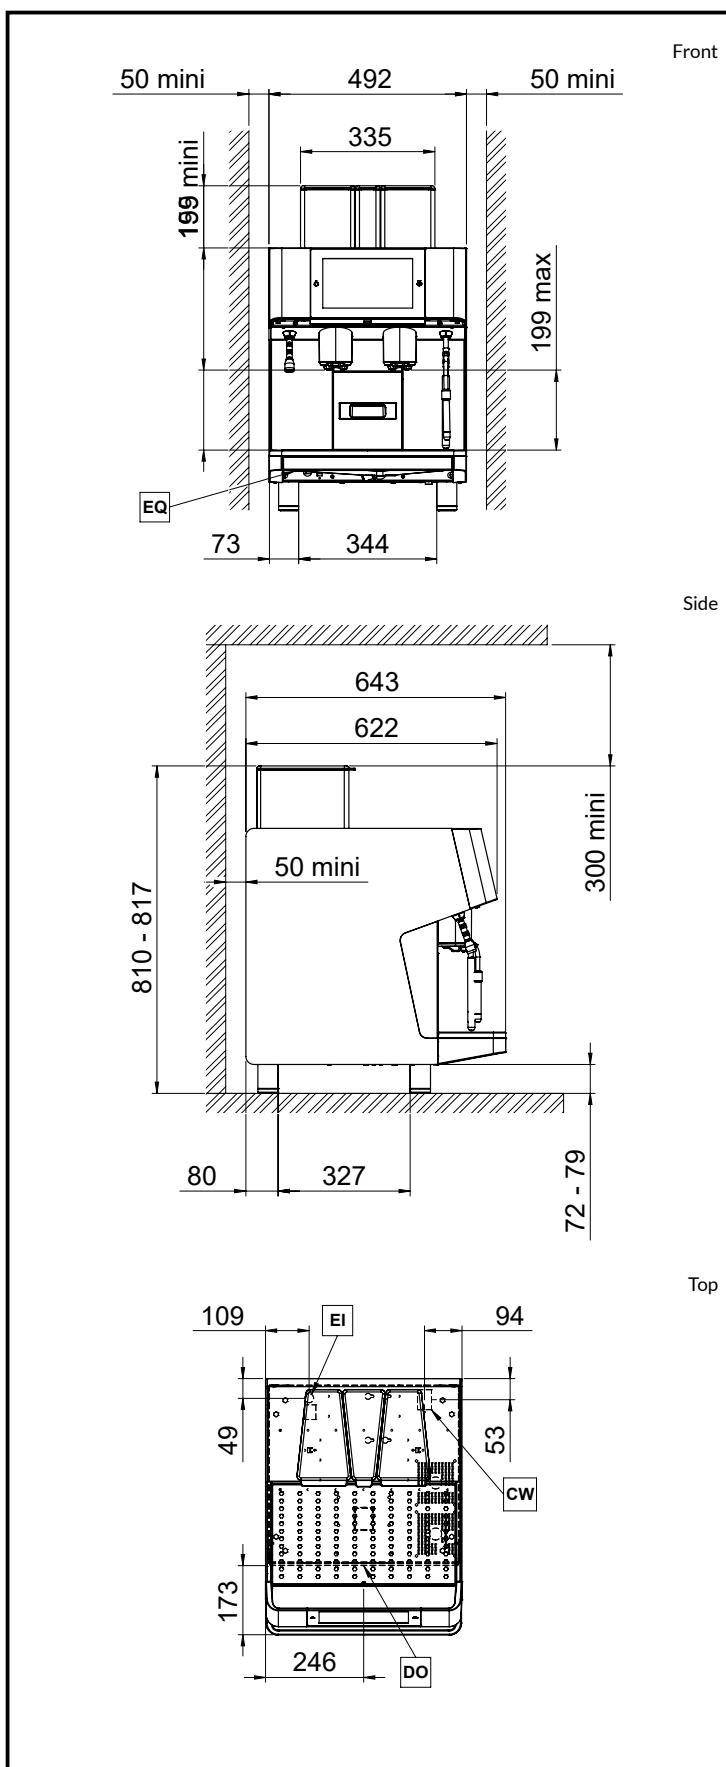

UNIC