

Modular Cooking Range Line EVO700 6 Drawer Refrigerated Base (R290)

ITEM #		
MODEL #		
NAME #		
-		
SIS #		
AIA #		



372296 (Z7TTBECOMKN)

Refrigerated base with 6 drawers - R290

Short Form Specification

Item No.

Refrigerated base with 6 drawers. Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10°C. To be installed below EVO700 top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. Suitable to operate with ambient temperature up to +43°C. Constructed to allow flush-fitting junction between units.

Main Features

- Unit can be easily installed below other 700 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- · Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability

 CFC and HCFC free (highly ecological refrigerant type: R290).


Optional Accessories

•	Flanged feet kit	PNC 206136	
•	Frontal kicking strip for concrete installation, 1600 mm	PNC 206152	
•	Frontal kicking strip, 1600 mm	PNC 206179	
•	4 feet for concrete installation (not for 900 line freestanding grill)	PNC 206210	
•	2 panels for service duct (single installation)	PNC 206248	
•	Pair of side kicking strips	PNC 206249	
•	Pair of side kicking strips (concrete installation)	PNC 206265	
•	2 side covering panels, height 700 mm, depth 700 mm	PNC 206319	
•	2 drawers for refrigerated base	PNC 206348	
•	Base support for feet or wheels - 800mm (EV0700/900)	PNC 206367	
•	Kit 6 wheels - 3 swivelling with brake	PNC 206432	

APPROVAL:




Modular Cooking Range Line EVO700 6 Drawer Refrigerated **Base (R290)**

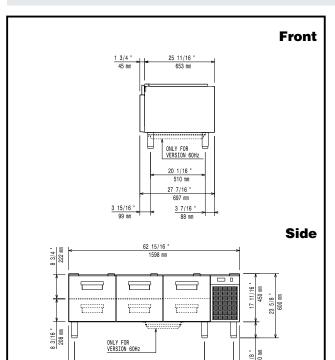

10 11/16 " 272 mm



2 3/16 "

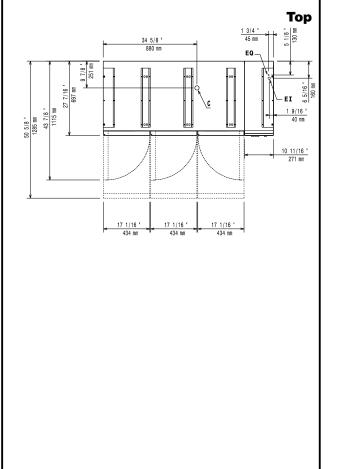

Electric

Supply voltage: 220-230 V/1N ph/50 Hz

Electrical power max.: 0.4 kW **Total Watts:** 0.4 kW CE-SCHUKO Plug type:

Key Information:

External dimensions, Width: 1600 mm **External dimensions, Depth:** 700 mm **External dimensions, Height:** 600 mm Net weight: 110 kg Shipping weight: 158 kg Shipping height: 820 mm Shipping width: 1700 mm Shipping depth: 800 mm Shipping volume: 1.12 m³ **Gross capacity:** 180 lt

Sustainability

Refrigerant type: R290 Refrigerant weight: 85 g











