

## Modular Cooking Range Line EVO900 3 Drawer Refrigerated Base (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



392601 (Z9TTAECOMKN)

Refrigerated base with 3  
drawers, -2/+10 C - R290

### Short Form Specification

**Item No.** \_\_\_\_\_

Refrigerated base with 3 drawers. Built-in refrigerator compressor unit. Can operate over the temperature range of -2°C to 10 °C. Exterior panels in stainless steel. To be installed below other EVO900 top units. Delivered with 50 mm height adjustable feet.

### Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit can be easily installed below other 900 line top models.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- Designed for modular installation into the cooking block.

### Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

### Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).


### Optional Accessories

- |                                                            |            |                          |
|------------------------------------------------------------|------------|--------------------------|
| • Flanged feet kit                                         | PNC 206136 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600 mm | PNC 206152 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600 mm                           | PNC 206179 | <input type="checkbox"/> |
| • Kit 3 base support for wheels                            | PNC 206430 | <input type="checkbox"/> |
| • Kit 6 wheels - 3 swivelling with brake                   | PNC 206432 | <input type="checkbox"/> |
| • KIT SUPPORT FOR FEET FOR 200MMFRYER/400                  | PNC 206438 | <input type="checkbox"/> |


APPROVAL: \_\_\_\_\_

## Modular Cooking Range Line EVO900 3 Drawer Refrigerated Base (R290)

### Front




## Side

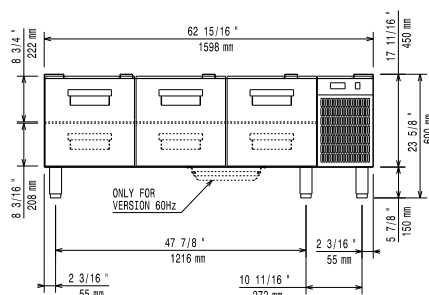

**EI** = Electrical inlet (power)

**Top**

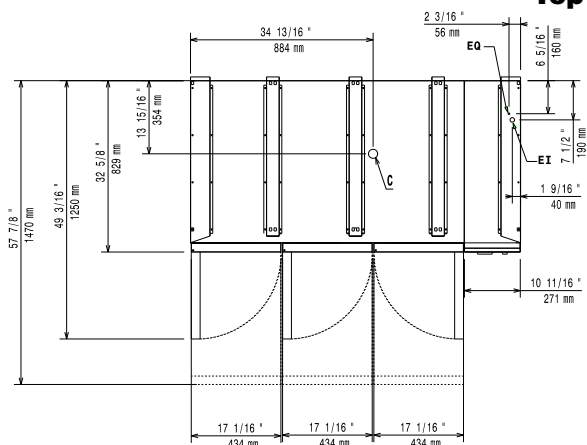

## Electric

<b>Supply voltage:</b>	220-230 V/1N ph/50 Hz
<b>Electrical power max.:</b>	0.44 kW
<b>Total Watts:</b>	0.44 kW
<b>Plug type:</b>	CE-SCHUKO

### Key Information:

<b>External dimensions, Width:</b>	1600 mm
<b>External dimensions, Depth:</b>	830 mm
<b>External dimensions, Height:</b>	600 mm
<b>Net weight:</b>	110 kg
<b>Shipping weight:</b>	146 kg
<b>Shipping height:</b>	820 mm
<b>Shipping width:</b>	1300 mm
<b>Shipping depth:</b>	1700 mm
<b>Shipping volume:</b>	1.81 m <sup>3</sup>
<b>Gross capacity:</b>	210 lt

## Sustainability

Refrigerant type:	R290
Refrigerant weight:	85 g