

## Modular Cooking Range Line EVO900 3 Drawer Refrigerated Base (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



392601 (Z9TTAECOMKN)

 Refrigerated base with 3  
drawers, -2/+10 C - R290

### Short Form Specification

#### Item No.

Refrigerated base with 3 drawers. Built-in refrigerator compressor unit. Can operate over the temperature range of -2°C to 10 °C. Exterior panels in stainless steel. To be installed below other EVO900 top units. Delivered with 50 mm height adjustable feet.

### Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit can be easily installed below other 900 line top models.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- Designed for modular installation into the cooking block.

### Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

### Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).


### Optional Accessories

- |                                                            |            |                          |
|------------------------------------------------------------|------------|--------------------------|
| • Flanged feet kit                                         | PNC 206136 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600 mm | PNC 206152 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600 mm                           | PNC 206179 | <input type="checkbox"/> |
| • Kit 3 base support for wheels                            | PNC 206430 | <input type="checkbox"/> |
| • Kit 6 wheels - 3 swivelling with brake                   | PNC 206432 | <input type="checkbox"/> |
| • KIT SUPPORT FOR FEET FOR 200MMFRYER/400                  | PNC 206438 | <input type="checkbox"/> |


APPROVAL: \_\_\_\_\_

# Modular Cooking Range Line EVO900 3 Drawer Refrigerated Base (R290)

## Front




## Side

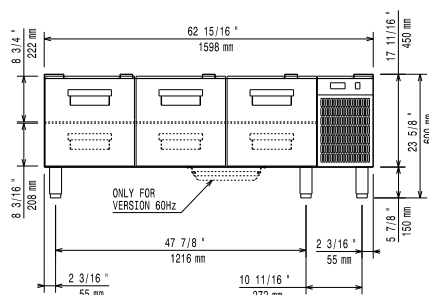

EI = Electrical inlet (power)

## Top

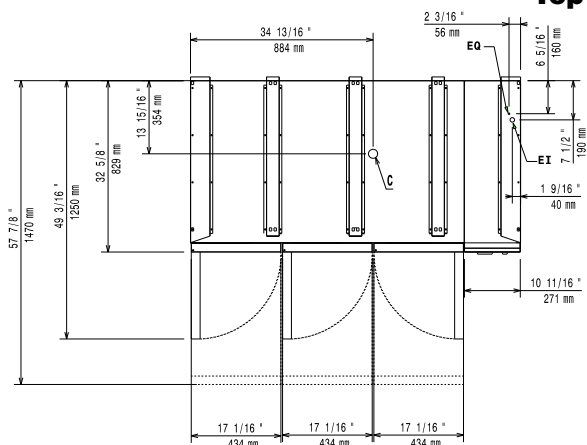

## Electric

|                        |                       |
|------------------------|-----------------------|
| Supply voltage:        | 220-230 V/1N ph/50 Hz |
| Electrical power max.: | 0.44 kW               |
| Total Watts:           | 0.44 kW               |
| Plug type:             | CE-SCHUKO             |

## Key Information:

|                              |                     |
|------------------------------|---------------------|
| External dimensions, Width:  | 1600 mm             |
| External dimensions, Depth:  | 830 mm              |
| External dimensions, Height: | 600 mm              |
| Net weight:                  | 110 kg              |
| Shipping weight:             | 146 kg              |
| Shipping height:             | 820 mm              |
| Shipping width:              | 1300 mm             |
| Shipping depth:              | 1700 mm             |
| Shipping volume:             | 1.81 m <sup>3</sup> |
| Gross capacity:              | 210 lt              |

## Sustainability

|                     |      |
|---------------------|------|
| Refrigerant type:   | R290 |
| Refrigerant weight: | 85 g |