

Modular Cooking Range Line EVO900 2 Drawer Refrigerated Base (R290)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



392602 (Z9TTAECOMIN)

Refrigerated base with 2 drawers, -2/+10 C - R290

Short Form Specification

Item No.

Refrigerated base with 2 drawers. Built-in refrigerator compressor unit. Can operate over the temperature range of -2°C to 10 °C. Exterior panels in stainless steel. To be installed below other EVO900 top units. Delivered with 50 mm height adjustable feet.

Main Features

- Unit can be easily installed below other 900 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- · Designed for modular installation into the cooking block.

Construction

- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- · Built-in compressor to suit operating conditions.
- · Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability

 CFC and HCFC free (highly ecological refrigerant type: R290).


Optional Accessories


Flanged feet kit	PNC 206136	
 Frontal kicking strip for concrete installation, 1200 mm 	PNC 206151	
 Frontal kicking strip, 1200 mm 	PNC 206178	
 Rear paneling - 1200mm (EV0700/900) 	PNC 206376	
 Kit 3 base support for wheels 	PNC 206430	
• Kit 6 wheels - 3 swivelling with brake	PNC 206432	
KIT SUPPORT FOR FEET FOR 200MMFRYER/400	PNC 206438	

APPROVAL:




Modular Cooking Range Line EVO900 2 Drawer Refrigerated Base (R290)





El = Electrical inlet (power)

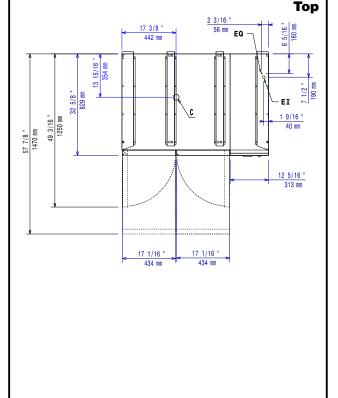

Electric

Supply voltage: 220-230 V/1N ph/50 Hz

Electrical power max.: 0.44 kW **Total Watts:** 0.44 kW

Key Information:

1200 mm **External dimensions, Width: External dimensions, Depth:** 830 mm **External dimensions, Height:** 600 mm Net weight: 114 kg **Shipping weight:** 123 kg Shipping height: 820 mm Shipping width: 1060 mm 1300 mm Shipping depth: Shipping volume: 1.13 m³ 140 lt **Gross capacity:**

Refrigeration Data

Compressor power:

Sustainability

R290 Refrigerant type: Refrigerant weight: 85 g









