

Modular Cooking Range Line EVO700 Two Wells Electric Fryer Top 12 liter

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**372143 (Z7FREH2E0N)**12+12-lt electric fryer top with
2 wells and 2 baskets (internal
heating elements)**372080 (Z7FREH2E00)**12+12-lt electric fryer top with
2 wells and 2 baskets (internal
heating elements)

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. High efficiency tilting incoloy armoured heating elements (17.4kW) placed inside the well. Deep drawn well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the wells.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Incoloy armoured heating elements located inside the well can be lifted up for easier cleaning.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

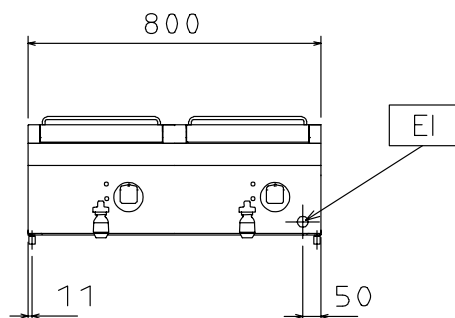
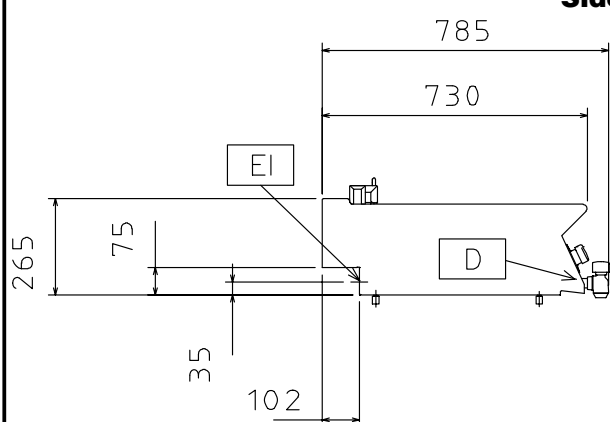
APPROVAL: _____

Included Accessories

- 2 of Basket for 12lt electric fryer tops PNC 921629

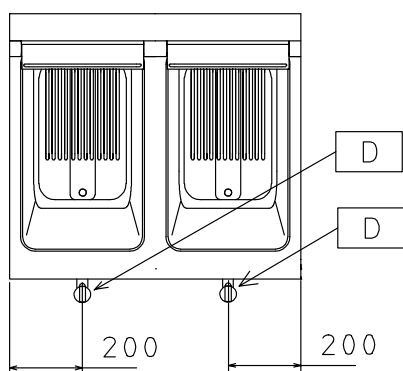
Optional Accessories

- Junction sealing kit (only for 372080) PNC 206086 ☐
- Support for bridge type installation, 800 mm (only for 372080) PNC 206137 ☐
- Support for bridge type installation, 1000 mm (only for 372080) PNC 206138 ☐
- Support for bridge type installation, 1200 mm (only for 372080) PNC 206139 ☐
- Support for bridge type installation, 1400 mm (only for 372080) PNC 206140 ☐
- Support for bridge type installation, 1600 mm (only for 372080) PNC 206141 ☐
- Frontal handrail 800 mm (only for 372080) PNC 206167 ☐
- Large handrail (portioning shelf) 800 mm (only for 372080) PNC 206186 ☐
- Frontal handrail 1200 mm (only for 372080) PNC 206191 ☐
- Frontal handrail 1600 mm (only for 372080) PNC 206192 ☐
- Right and left side handrails (only for 372080) PNC 206240 ☐
- Chimney upstand, 800 mm (only for 372080) PNC 206304 ☐
- 2 side covering panels, height 250 mm, depth 700 mm (only for 372080) PNC 206320 ☐
- Chimney grid net, 400mm (only for 372080) PNC 206400 ☐
- Basket for 12lt electric fryer tops (only for 372080) PNC 921629 ☐
- 2 baskets for 2x5/12lt electric fryers (only for 372080) PNC 960638 ☐

Front

Side


EI = Electrical inlet (power)

EQ = Equipotential screw

Top


Electric

Supply voltage:

372143 (Z7FREH2E0N)

230 V/3 ph/50/60 Hz

372080 (Z7FREH2E00)

380-400 V/3N ph/50/60 Hz

Total Watts:

17.4 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width): 240 mm

Usable well dimensions (height): 235 mm

Usable well dimensions (depth): 420 mm

Well capacity: 10 lt MIN; 12 lt MAX

Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight: 45 kg

Shipping weight:

372143 (Z7FREH2E0N)

54 kg

372080 (Z7FREH2E00)

50 kg

Shipping height:

372143 (Z7FREH2E0N)

540 mm

372080 (Z7FREH2E00)

530 mm

Shipping width:

820 mm

Shipping depth:

860 mm

Shipping volume:

372143 (Z7FREH2E0N)

0.38 m³

372080 (Z7FREH2E00)

0.37 m³

[NOT TRANSLATED]

372143 (Z7FREH2E0N)

N7FE2

372080 (Z7FREH2E00)

EF17212