

Modular Cooking Range Line EVO700 2-Hot Plates Electric Boiling Top Range

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**372014 (Z7ECED2R00)**2-hot plate (2,6 kW each)
electric boiling top**372126 (Z7ECED2R0N)**2-hot plate (2,6 kW each)
electric boiling top

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Two 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

Construction

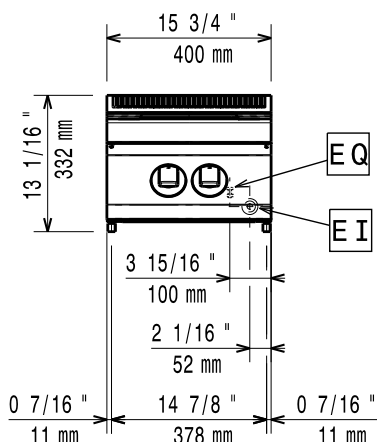
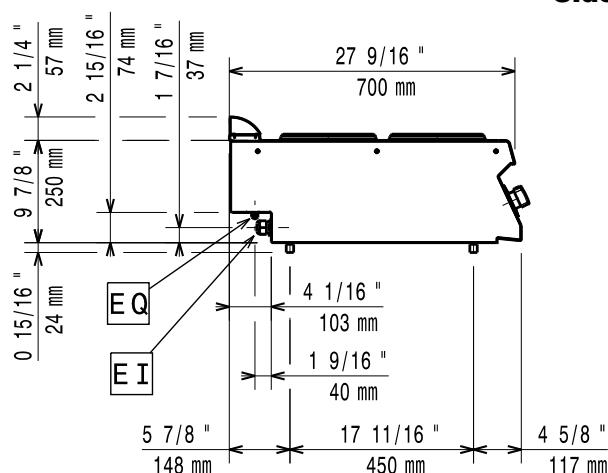
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- External panel in Stainless Steel with Scotch Brite finish.

APPROVAL: _____

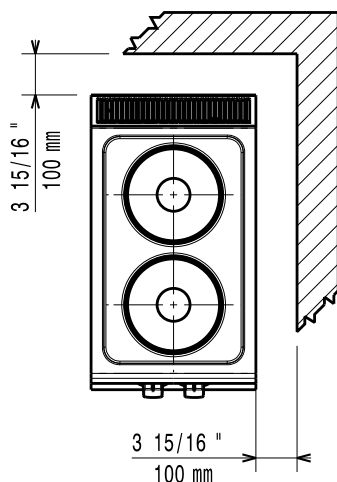
Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Junction sealing kit | PNC 206086 | ☐ |
| • Support for bridge type installation, 800 mm | PNC 206137 | ☐ |
| • Support for bridge type installation, 1000 mm | PNC 206138 | ☐ |
| • Support for bridge type installation, 1200 mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400 mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600 mm | PNC 206141 | ☐ |
| • Support for bridge type installation, 400 mm | PNC 206154 | ☐ |
| • Frontal handrail 400 mm | PNC 206166 | ☐ |
| • Frontal handrail 800 mm | PNC 206167 | ☐ |
| • Large handrail (portioning shelf) 400 mm | PNC 206185 | ☐ |
| • Large handrail (portioning shelf) 800 mm | PNC 206186 | ☐ |
| • Frontal handrail 1200 mm | PNC 206191 | ☐ |
| • Frontal handrail 1600 mm | PNC 206192 | ☐ |
| • Right and left side handrails | PNC 206240 | ☐ |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | ☐ |
| • Water column extension | PNC 206291 | ☐ |
| • Chimney upstand, 400 mm | PNC 206303 | ☐ |
| • 2 side covering panels, height 250 mm, depth 700 mm | PNC 206320 | ☐ |
| • Chimney grid net, 400mm | PNC 206400 | ☐ |

Modular Cooking Range Line EVO700 2-Hot Plates Electric Boiling Top Range

Front

Side


EI = Electrical inlet (power)
 EQ = Equipotential screw

Top


Electric

Supply voltage:

372014 (Z7ECED2R00)	380-400 V/3 ph/50-60 Hz
372126 (Z7ECED2R0N)	230 V/3 ph/50/60 Hz

Predisposed for:

Total Watts:	5.2 kW
--------------	--------

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight:	20 kg
-------------	-------

Shipping weight:

372014 (Z7ECED2R00)	24 kg
372126 (Z7ECED2R0N)	23 kg

Shipping height:

372014 (Z7ECED2R00)	530 mm
372126 (Z7ECED2R0N)	540 mm

Shipping width:

Shipping depth:

Shipping volume:

[NOT TRANSLATED]

372014 (Z7ECED2R00)	EH72T
372126 (Z7ECED2R0N)	N7CE1
Front Plates Power:	2.6 - 0 kW
Back Plates Power:	2.6 - kW
Front Plates dimensions:	Ø 230
Back Plates dimensions:	Ø 230