

# Modular Cooking Range Line EVO900 One Well Electric Fryer 23 liter

ITEM #	
MODEL #	
NAME #	
SIS #	_
AIA #	



392337 (Z9KKGDBAMCA)

23-It electric fryer with 1 "V" shaped well (external heating elements) and 2 half size baskets - free standing

## **Short Form Specification**

### Item No.

High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

#### **Main Features**

- Deep drawn V-Shaped well.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- $\bullet$  Thermostatic regulation of oil temperature up to a maximum of 185  $^{\circ}\text{C}$  .
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control panel offers a better guarantee against oil infiltration.
- External panels in Stainless Steel with Scotch Brite finish.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

### Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- Unit is 900mm deep to give a larger working surface area.
- Unit delivered with four 50 mm legs in stainless steel as standard.
- · IPX5 water resistance certification.

### Sustainability

 This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

APPROVAL:



# Modular Cooking Range Line EVO900 One Well Electric Fryer 23 liter

### **Included Accessories**


•	1 of DOOR FOR OPEN BASE CUPBOARD	PNC 206350
	1 of 2 half size baskets for 18/23lt well fryers	PNC 927223


<b>Optional Accessories</b>		
OIL FILTER S/S FOR 23 LT FRYERS	PNC 200086	
Junction sealing kit	PNC 206086	
<ul> <li>4 wheels, 2 swivelling with brake (EV0700/900). It is mandatory to install with base supports for feet/wheels.</li> </ul>	PNC 206135	
Flanged feet kit	PNC 206136	
<ul> <li>Pair of side kicking strips</li> </ul>	PNC 206180	
Hygienic lid for 23lt fryers	PNC 206201	
<ul> <li>Frontal kicking strip for 23lt fryers in two parts</li> </ul>	PNC 206203	
<ul> <li>Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers</li> </ul>	PNC 206209	
<ul> <li>Chimney upstand, 400 mm</li> </ul>	PNC 206303	
<ul> <li>Base support for wheels (lateral) for 23lt fryers and pastacookers and refrigerated bases (900)</li> </ul>	PNC 206372	
Chimney grid net, 400mm	PNC 206400	
SEDIMENT TRAY FOR 23LT FRYER	PNC 921023	
• 2 half size baskets for 18/23lt well fryers	PNC 927223	
• 1 full size basket for 18/23lt well fryers	PNC 927226	
<ul> <li>Unclogging rod for 23lt fryers drainage pipe</li> </ul>	PNC 927227	
• Deflector for floured products for the 23lt fryer	PNC 960645	







# Modular Cooking Range Line EVO900 One Well Electric Fryer 23 liter







El = Electrical inlet (power) **EQ** = Equipotential screw

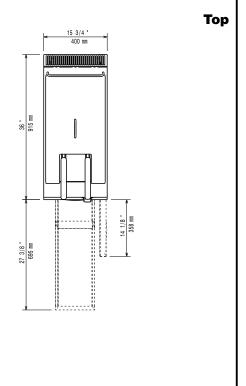

**Electric** 

Side

Supply voltage: 380-400 V/3N ph/50-60 Hz

**Total Watts:** 18 kW

### **Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width): 340 mm Usable well dimensions (height): 575 mm Usable well dimensions (depth): 400 mm

Well capacity: 21 It MIN; 23 It MAX

Performance\*: 37.5 kg\hr

**Thermostat Range:** 105 °C MIN; 185 °C MAX

Net weight: 57 kg Shipping weight: 73 kg Shipping height: 1080 mm Shipping width: 460 mm Shipping depth: 1020 mm Shipping volume: 0.51 m<sup>3</sup>

\*Based on: ASTM F1361-Deep fat fryers

[NOT TRANSLATED] EFE91M23







