

Modular Cooking Range Line EVO900 Gas Solid Top on Gas Oven

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



392264 (Z9STGH10GA)

Gas solid top (10,5 kW) on
gas oven (8,5 kW) - (AGA)

Short Form Specification

Item No. _____

High efficiency 10.5 kW central burner with flame failure device and protected pilot light. Large cooking surface with differentiated heating zones. Large flat cooking surface made in cast iron allows for the use of a number of various sized pots and pans, all easily moved across the surface without lifting. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Gas heated, 10.5 kW central burner, solid top.
- Durable cast iron cooking plate, easy to clean.
- The center of the plate can reach a maximum temperature of 500 °C while decreasing outwards.
- Central burner with optimized combustion, flame failure device and protected pilot light.
- Piezo ignition.
- Temperature gradients to satisfy different cooking needs, provided over the whole plate thanks to the temperature fine-tuning by zone.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Pans can easily be moved from one area to another without lifting.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Oven thermostat adjustable from 120 °C to 280 °C.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.

Construction


- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL: _____


Optional Accessories

• Junction sealing kit	PNC 206086	☐
• Draught diverter, 150 mm diameter	PNC 206132	☐
• Matching ring for flue condenser, 150 mm diameter	PNC 206133	☐
• 4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.	PNC 206135	☐
• Flanged feet kit	PNC 206136	☐
• Frontal kicking strip for concrete installation, 800 mm	PNC 206148	☐
• Frontal kicking strip for concrete installation, 1000 mm	PNC 206150	☐
• Frontal kicking strip for concrete installation, 1200 mm	PNC 206151	☐
• Frontal kicking strip for concrete installation, 1600 mm	PNC 206152	☐
• 2 SIDE KICKING STRIPS-CONCRETE INST-900	PNC 206157	☐
• Side handrail for right/left hand	PNC 206165	☐
• Frontal handrail 800 mm	PNC 206167	☐
• Frontal kicking strip, 800 mm	PNC 206176	☐
• Frontal kicking strip, 1000 mm	PNC 206177	☐
• Frontal kicking strip, 1200 mm	PNC 206178	☐
• Frontal kicking strip, 1600 mm	PNC 206179	☐
• Pair of side kicking strips	PNC 206180	☐
• 2 panels for service duct (single installation)	PNC 206181	☐
• Large handrail (portioning shelf) 800 mm	PNC 206186	☐
• Frontal handrail 1200 mm	PNC 206191	☐
• Frontal handrail 1600 mm	PNC 206192	☐
• 2 panels for service duct (back to back installation)	PNC 206202	☐
• 4 feet for concrete installation (not for 900 line freestanding grill)	PNC 206210	☐
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐
• Water column with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension	PNC 206290	☐
• Chimney upstand, 800 mm	PNC 206304	☐
• 2 side covering panels, height 700 mm, depth 900 mm	PNC 206335	☐
• Base support for feet or wheels - 800mm (EVO700/900)	PNC 206367	☐
• Chimney grid net, 400mm	PNC 206400	☐
• Pressure regulator for gas units	PNC 927225	☐

Front

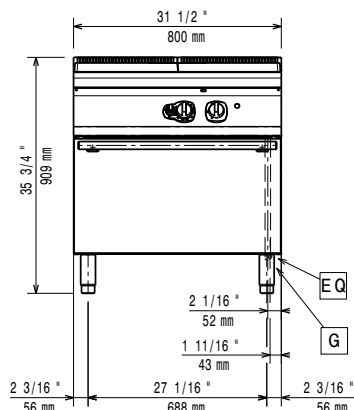


Side

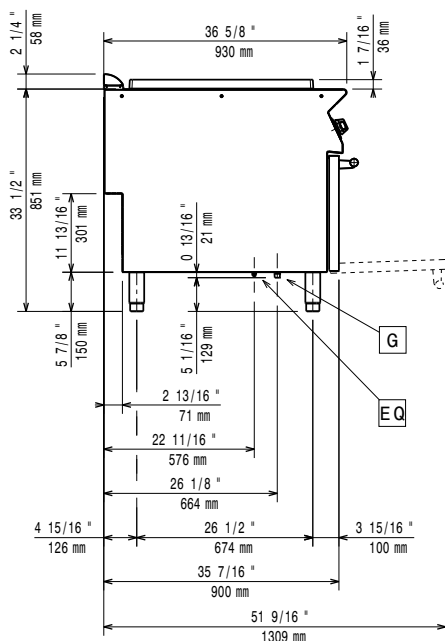

EQ = Equipotential screw
 G = Gas connection

Top

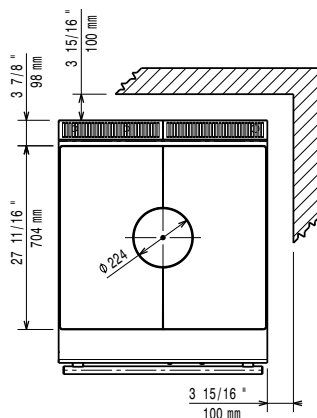

Gas

Natural gas - Pressure:

392264 (Z9STGH10GA)

7" w.c. (17.4 mbar)

Gas Power:

19 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG; Natural Gas

Gas Inlet:

1/2"

Key Information:

Oven working Temperature:

120 °C MIN; 280 °C MAX

Oven Cavity Dimensions (width):

575 mm

Oven Cavity Dimensions (height):

300 mm

Oven Cavity Dimensions (depth):

700 mm

Net weight:

171 kg

Shipping weight:

167 kg

Shipping height:

1090 mm

Shipping width:

1020 mm

Shipping depth:

880 mm

Shipping volume:

0.98 m³

[NOT TRANSLATED]

N9TG

Solid top usable surface (width):

795 mm

Solid top usable surface (depth):

696 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.